




Connectors > Contacts > Connector Contacts > DYNAMIC 3000 CONTACT

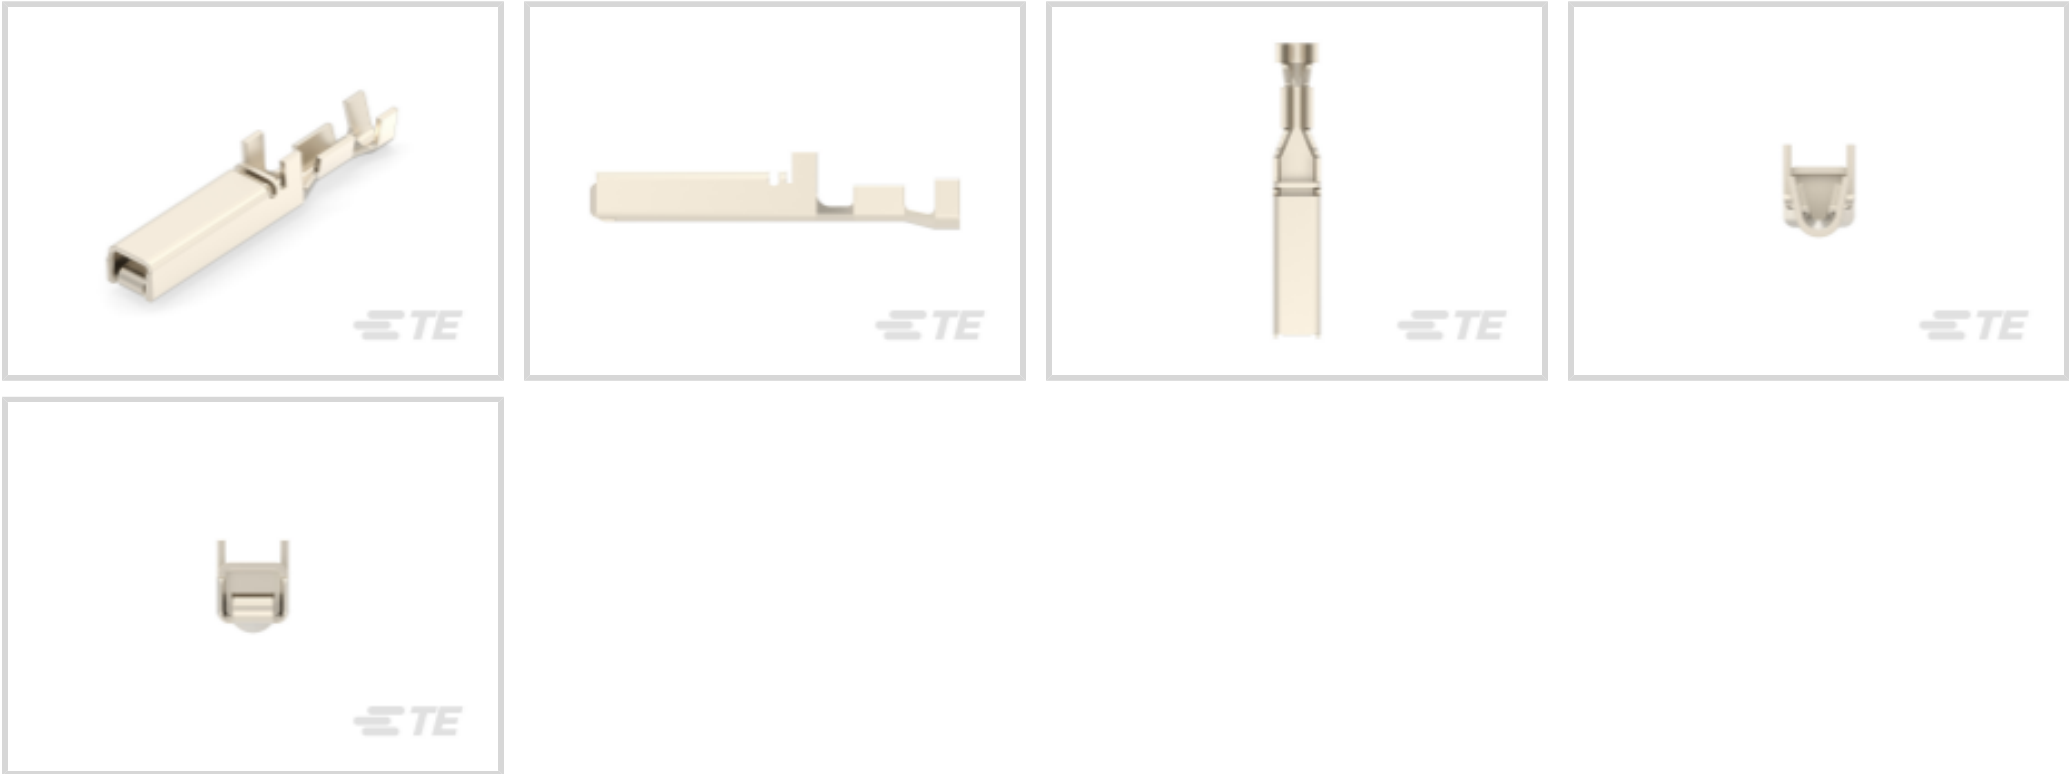

Contact Type: **Receptacle**
Contact Mating Area Plating Material: **Gold**
Operating Voltage: **250 VAC**
Compatible With Wire & Cable Type: **Discrete Wire**
Wire Size: **24 – 20 AWG**

[All DYNAMIC 3000 CONTACT \(91\)](#)

Features

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Product Type Features

Discrete Wire Type	Solid or Stranded
--------------------	-------------------

Packaging Features

Packaging Method	Reel & Box
Packaging Quantity	14000

Dimensions

Compatible Insulation Diameter Range	1.2 – 2.6 mm[.047 – .102 in]
Wire Size	.2 – .6 mm ²

Contact Features

Contact Orientation	Straight
Mating Tab Thickness	.64 mm[.025 in]



Barrel Type	Open
Contact Mating Area Plating Material Thickness	.38 µm[15 µin]
Mating Tab Width	2 mm[.08 in]
Contact Length	17.8 mm[.701 in]
Contact Type	Receptacle
Contact Mating Area Plating Material	Gold
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	15 A

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC



Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # CAT-D9934-A75B
Receptacle and Tab Housing: 5.08 mm Pitch, 250-600V

TE Part # CAT-D9934-A75A
DYNAMIC 3100 REC AND TAB HSG

TE Part # CAT-D9934-A75C
DYNAMIC 3500 REC AND TAB HSG

TE Part # 91559-1
CCII D-3 M REC TAB 24-20 ASSY

TE Part # 234168-1
EXTRACTION TOOL(DYNAMIC D-3)

TE Part # 917249-1
DYNAMIC D-3400F REC HSG 20P

TE Part # 2151080-1
OCEAN_2.0_APPLICATOR-S-062F110F-RSM

TE Part # 178214-1
DYNAMIC 3400 REC HSG 12P

TE Part # 90683-2
PROCrimper DIE ASSY DYNAMIC

TE Part # 2151080-2
OCEAN_2.0_APPLICATOR-S-062F110F-RSA


TE Part # 2305570-1
Strip Terminal Cutter-Side Feed-No Crimp

TE Part # 7-2151080-7
OCEAN_2.0_SPARE_PART_KIT-062F110F

Also in the Series | Dynamic 3000 Series




Connector Contacts(94)

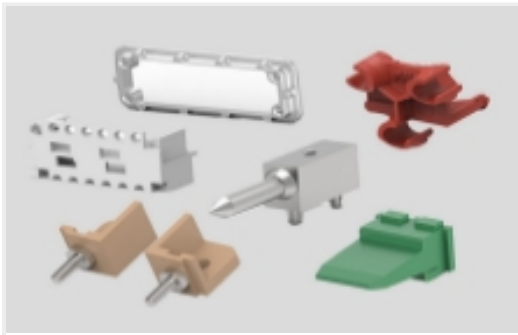


Connector Hardware(8)



Insertion & Extraction Tools(2)

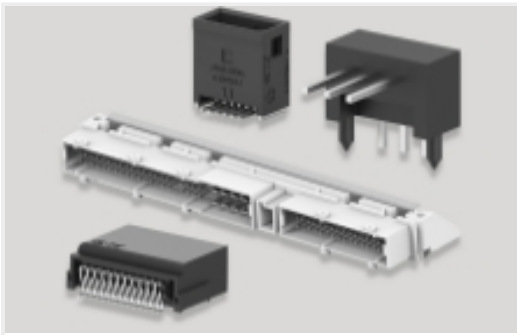

PCB Headers & Receptacles(282)

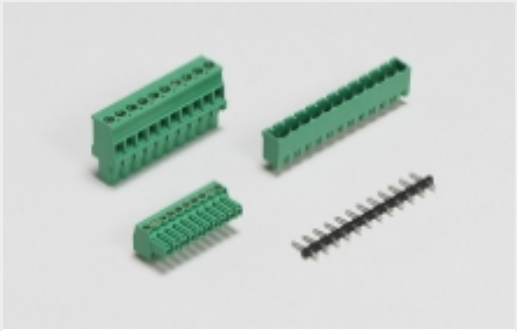

PCB Terminal Blocks(37)



Standard Rectangular Connectors(2)



Wire-to-Board Connector Assemblies & Housings(152)

Customers Also Bought



TE Part #1-178128-3
DYNAMIC 3200 REC HSG 3P SGL



TE Part #1903112-2
DYNAMIC D1000 TAB CONT AU 0.38 um M REEL



TE Part #175286-2
DYNAMIC D-3 TAB CONT. L AU 0.38



TE Part #1318105-1
DYNAMIC D-2000 REC CONT M




TE Part #T1329100125-000
H10A-TG-M25



TE Part #1-1827691-3
DYNATAP 3200 TAP ASSY 24P BOTTOM-MT TIN



TE Part #2345834-1
NEW MOTOR CONN REC KIT. PF



TE Part #690432-3
ADJUSTMENT SCREW

Documents

Product Drawings

DYNAMIC D-3 REC CONT/M AU 0.38

English

CAD Files

Customer View Model

ENG_CVM_CVM_1-175195-2_P.2d_dxf.zip

English

3D PDF



3D

Customer View Model

[ENG_CVM_CVM_1-175195-2_P.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-175195-2_P.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (non U.S.)

English

Agency Approvals

TUV Certificate

English

TUV Certificate

English