




Terminals & Splices > Ring Terminals

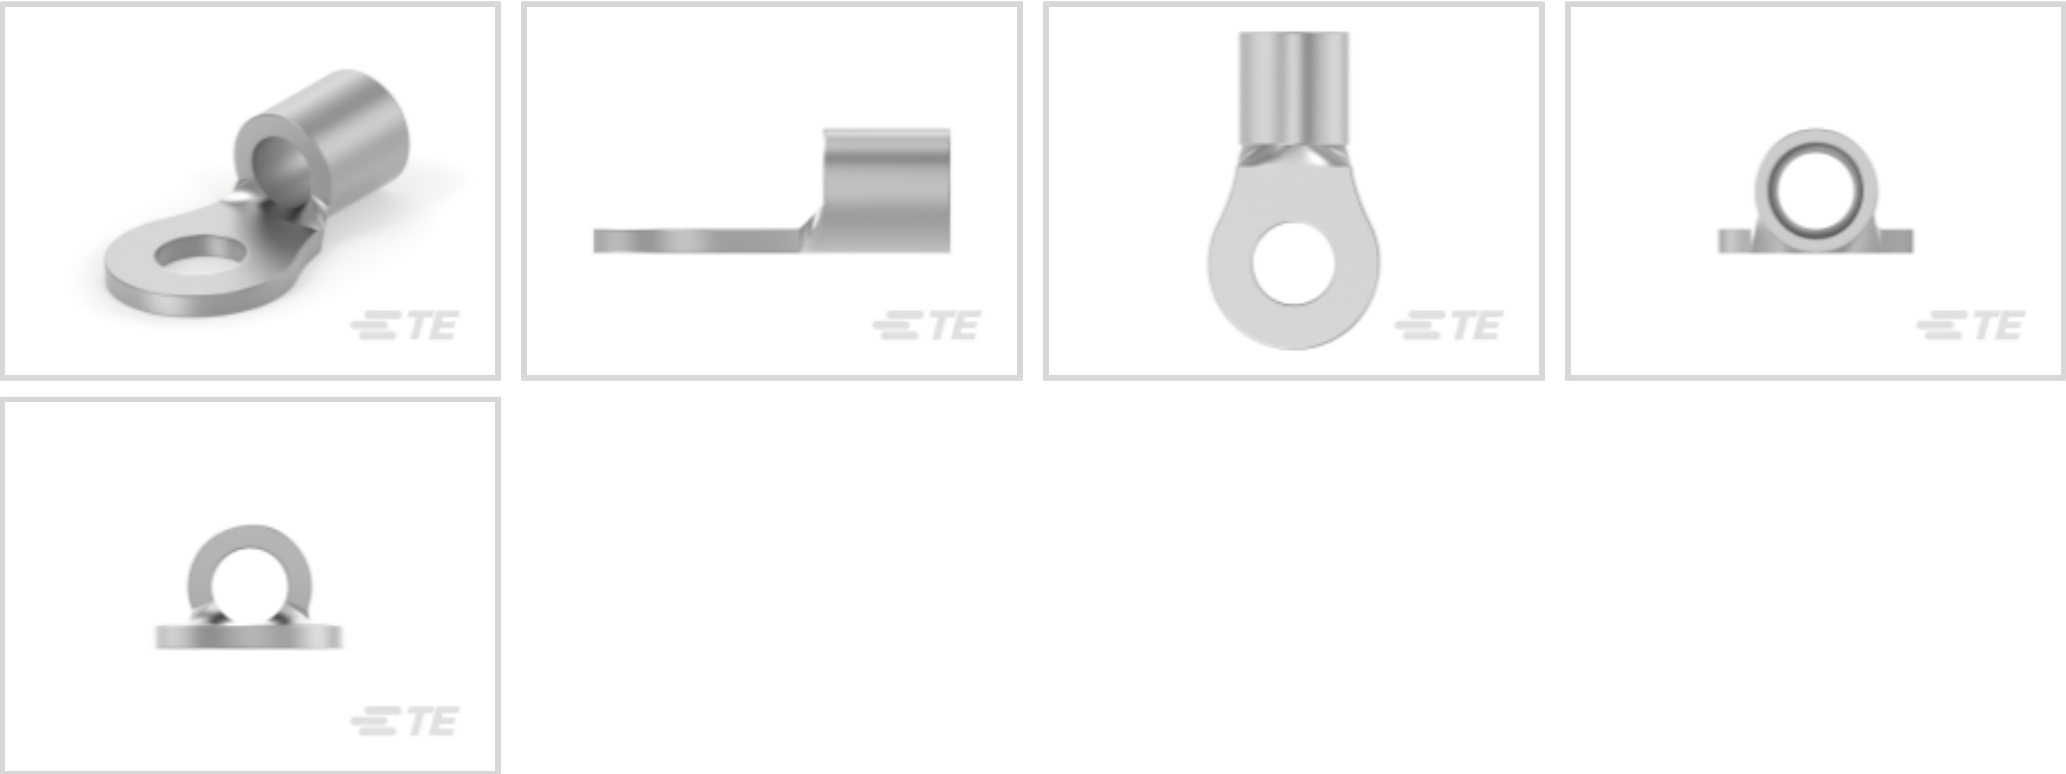

Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 2050 – 5180 CMA

Stud Size: M2.5, #4

Features

Product Type Features

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	M2.5, #4
Sealable	No

Wire Insulation Support Retention Type	Non-Insulation Support
--	------------------------

Dimensions

Wire Size	2050 – 5180 CMA
Stud Diameter	2.84 mm [.112 in]
Tongue Thickness	.79 mm [.031 in]
Product Length	12.19 mm [.48 in]
Barrel Inside Diameter	2.16 mm [.085 in]

Contact Features

Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin

Usage Conditions

--

Insulation Option	Uninsulated
Operating Temperature Range	170 °C[338 °F]

Operation/Application

Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin

Packaging Features

Packaging Method	Loose Piece
Packaging Quantity	1000

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Configuration Features

Number of Holes	1
-----------------	---

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Industry Standards

Government Qualified Terminal	No
-------------------------------	----

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 58545-1
SOLISTRAND 10-22 DIE ASSY

TE Part # 49935
DAHT SOLIS 22-10 ASSY

TE Part # 525693
DAHT SOLIS 22-10 ASSY

TE Part # 58545-3
SDE DIE ASSY. 22-10 SOLISTRAND

TE Part # 58546-1
PC 22-10 SOLISSPICE SPL I SHT

TE Part # 47813
DIES SOLIS 16-14 DIE SET

TE Part # 169400
CERTI-LOK FRAME W/O DIES

Customers Also Bought

TE Part #6609020-1
1EB1=F7098 S0


TE Part #2273110-4
M8 strgt socket to M12 strgt plug AA

TE Part #3-643820-4
04P MTA156 CONN ASSY 24AWG WHT

TE Part #1-66359-6
III+ PIN,18-14,30AU/FL,STRIP



TE Part #794440-1
MINI UMNL PIN SN 22-18 AWG

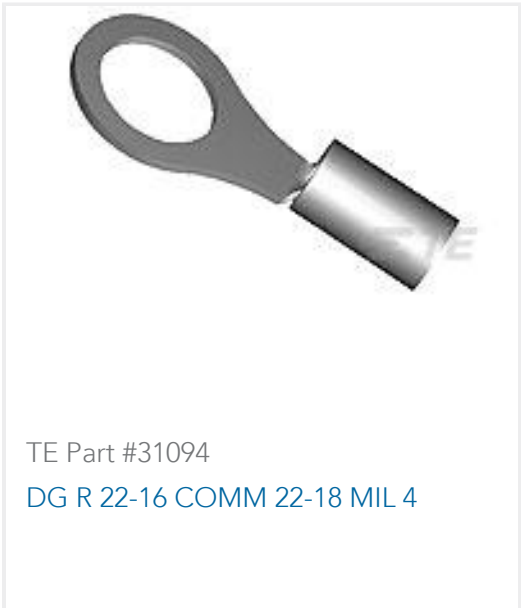

TE Part #31094
DG R 22-16 COMM 22-18 MIL 4




TE Part #66428-3
III+ SKT,30-26,15AU/FL,LP



TE Part #166645-1
EXTRACTION TOOL



TE Part #770042-1
12P UMNL II PLUG REAR 94VO

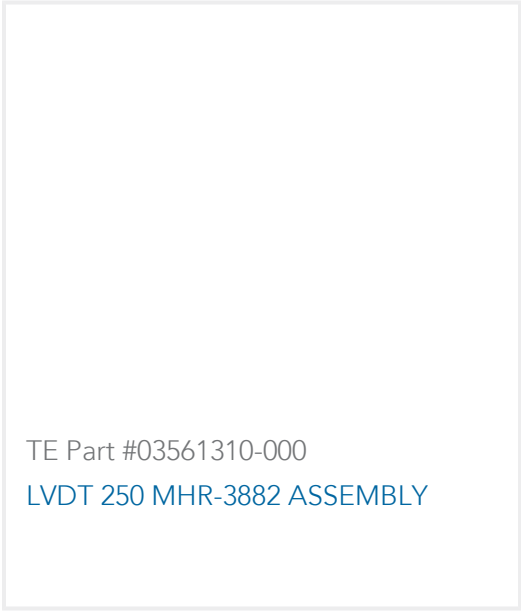

TE Part #03561310-000
LVDT 250 MHR-3882 ASSEMBLY

Documents

Product Drawings

TERMINAL,SOLIS R 16-14 4

English

CAD Files

Customer View Model

ENG_CVM_CVM_34119_S.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_34119_S.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_34119_S.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

SOLISTRAND - QRG

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

34119

Closed Ring Tongue Terminal, 16 AWG, #4 / M2.5 Stud Size, 2.84 mm [.112 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated



English

[UL Report](#)

English