

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0014562084

Status:

Active

Overview:

SL Modular Connectors

Description:

2.54mm Pitch SL Insulation Displacement Connector Assembly, Female, Single Row, Version G, Positive Lock, Wire Size 26 AWG, 0.38µm Gold (Au), 8 Circuits

Documents:

3D Model

Packaging Specification PK-70873-0001-001 (PDF)

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

3D Model (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

Ribbon Cable / Wire Trap Connectors

Series

70400

Comments

Terminals Preloaded

Component Type

Housing

Gender

Female

Glow-Wire Capable

No

Overview

SL Modular Connectors

Product Name

SL

Taxonomy

Connector Housings

UPC

800755034851

Physical

Circuits (Loaded)

8

Color - Resin

Black

Durability (mating cycles max)

50

Entry Angle

Vertical

Flammability

94V-0

Lock to Mating Part

Yes

Material - Metal

Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

Polyester Alloy

Net Weight

1.438/g

Number of Rows

1

PCB Retention

None

Packaging Type

Tube

Pitch - Mating Interface

2.54mm

Plating min - Mating

0.381µm

Plating min - Termination

1.905µm

Polarized to Mating Part

Yes

Stackable

Yes

Surface Mount Compatible (SMC)

N/A

Temperature Range - Operating

-40° to +105°C

Termination Interface: Style

IDT or Pierce

Wire Insulation Diameter

1.35mm max.

Wire Size AWG

26

Wire/Cable Type

Discrete Wire, Ribbon Cable


Electrical

Current - Maximum per Contact

3.0A

Voltage - Maximum

250V

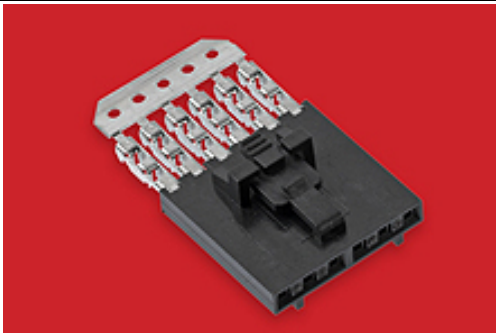

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

70400 Series

Mates With

Single Row Housing [70018](#) , [70107](#) Version A, [70107](#) Version B, [70543](#) , [70545](#) , [70553](#) , [70555](#)

Use With

[7307](#) Tinned 28AWG, [7767](#) Topcoat 28AWG, [24241](#) Tinned 26AWG, [8996](#) Topcoat 26AWG, [24226](#) Tinned 24AWG, [8997](#) Topcoat 24AWG, [24369](#) High Flex 26AWG, [24389](#) High Flex 24AWG

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

IDT Discrete

[621000700](#)

Handtool Module

Material Info

Engineering Number 70400-0847

Reference - Drawing Numbers

Packaging Specification PK-70873-0001-001
Sales Drawing SDA-70400-0841-0864-001

Ribbon Cable Tool 622016600
Kit, Press Not
Included

This document was generated on 01/05/2023

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION