© – TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G3	REVISED PER ECR-25-257161	18SEP2025	SA	DSC

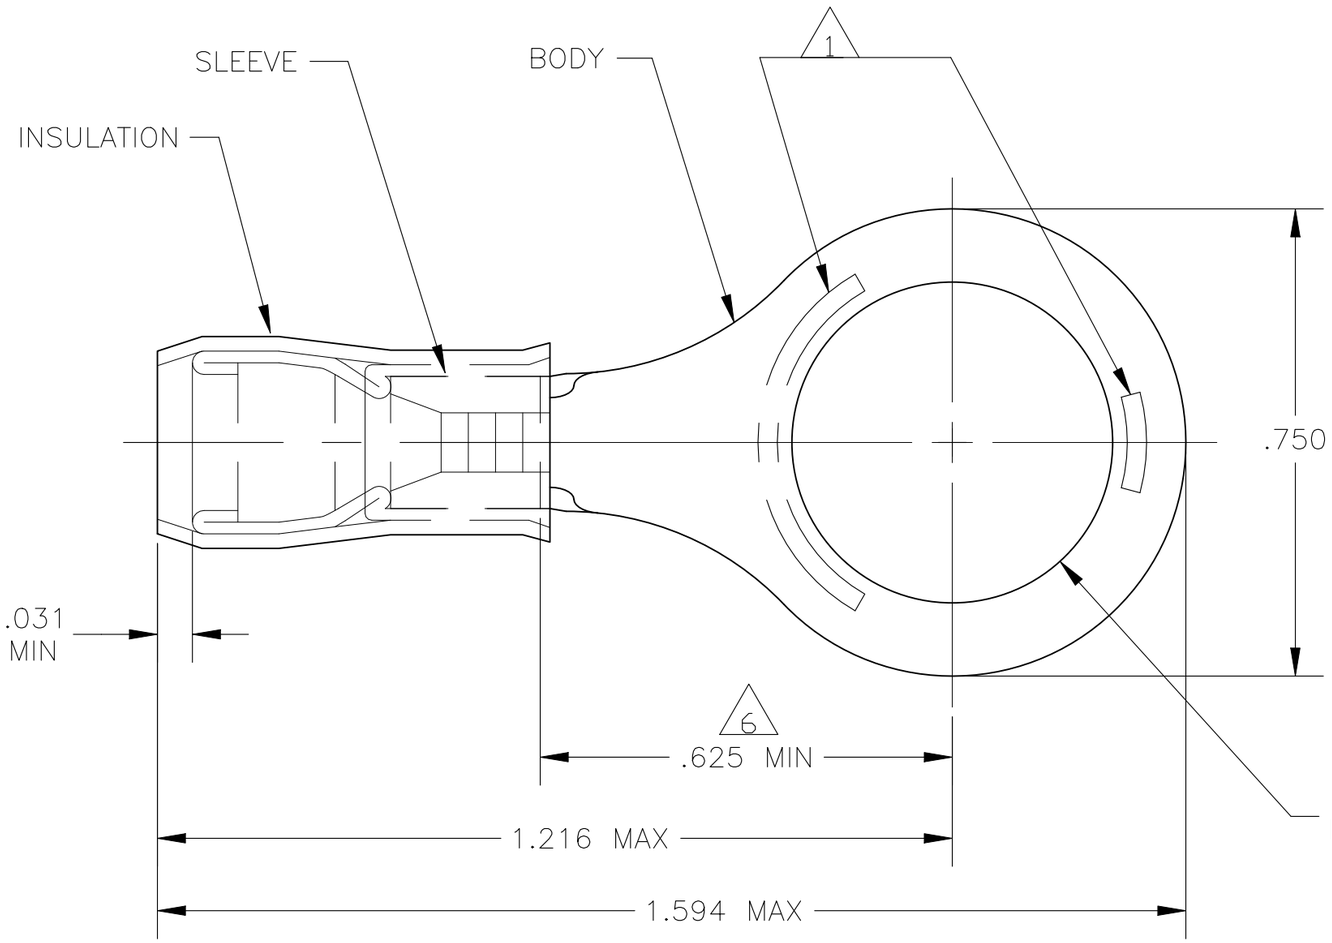

1 STAMP AMP 12-10* 6-9 APPROX AS SHOWN

2 WIRE INSULATION DIA: .150-.250

3 TONGUE MATERIAL THK: .039±.002

4 BODY & SLEEVE: TIN PLATE PER ASTM B545

5 BODY & SLEEVE- CU PER ASTM B152
INSULATION - NYLON, COLOR - YELLOW

6 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.

7 NOTE DELETED

8 NOTE DELETED

QTY	PACKAGE TYPE	PART NO
50	LOOSE PIECE, BOX	8-35151-2
1 KIT = 50 PIECES	LOOSE PIECE	6-35151-0
500	LOOSE PIECE	35151

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C MAX

VOLTAGE RATING: –

CIRCULAR MIL AREA: 2.62-6.64mm² [5,180-13,100] STRANDED OR SOLID

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± .008
4 PLC	± –
ANGLES	± –

MATERIAL 5

FINISH 4

DWN	JR RUTH	20FEB07
CHK	T MICHIELUTTI	20FEB07
APVD	T MICHIELUTTI	20FEB07
PRODUCT SPEC	–	
APPLICATION SPEC	–	
WEIGHT	–	

TE Connectivity

NAME
TERMINAL, RING TONGUE,
P.I.D.G.
WIRE SIZE: 12-10 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-35151	–

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV G3

1470-19 (1/15)