


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	J4	REVISED PER ECR-25-255998	15SEP2025	SA	DSC

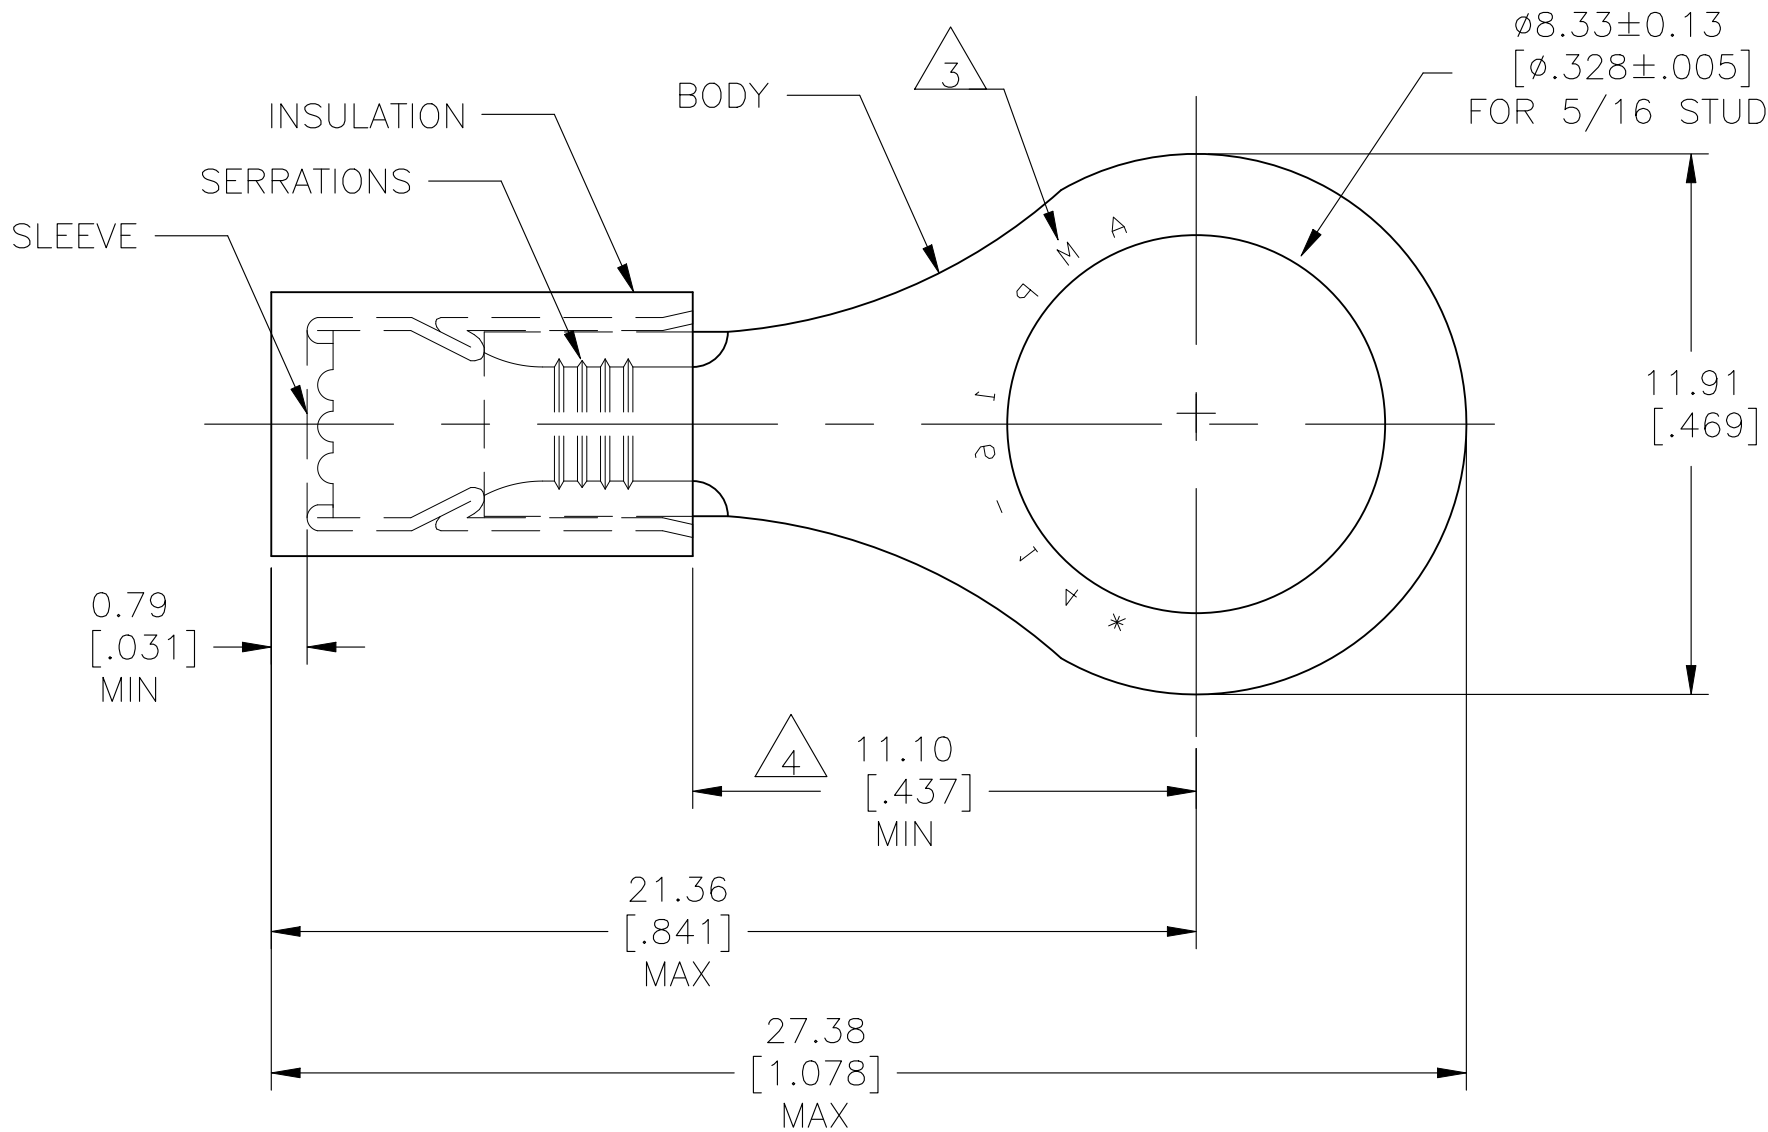

AMP WIRE RANGE	 Listed FILE E13288
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

- 1 TONGUE MATERIAL THK: 0.79±0.05[.031±.002]
- 2 FOR WIRE INSULATION DIA: 2.92[.115] TO 4.32[.170]
- 3 STAMP AMP 16-14* APPROX AS SHOWN.
- 4 DIMENSION APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.
- 5 MATERIAL: BODY & SLEEVE: COPPER PER ASTM B152.
INSULATION : NYLON
- 6 FINISH: BODY & SLEEVE: TIN PLATE PER ASTM B545.
INSULATION: COLOR-BLUE.

100	LOOSE PC, BOX	8-328998-1
1 KIT = 250 PIECES	LOOSE PIECE	6-328998-0
4000	ON TAPE REEL	2-328998-1
1000	LOOSE PIECE	328998
QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142


RECOMMENDED OPERATING TEMPERATURE:
105°C [221°F]

VOLTAGE RATING:
300V MAX

WIRE CROSS SECTIONAL AREA RANGE:
1.04-2.62mm² [2,050-5,180] CIR.MIL
SOLID OR STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]



MATERIAL
5

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -

1 PLC ± -

2 PLC ± 0.20[.008]

3 PLC ± -

4 PLC ± -

ANGLES ± 5°

FINISH 6

DWN KIRAN HOLAL 03APR12

CHK ROHDE DANIEL 03APR12

APVD ROHDE DANIEL 03APR12

PRODUCT SPEC -

APPLICATION SPEC -

WEIGHT -

CUSTOMER DRAWING

 TE Connectivity

NAME
WIRE TERMINAL,
P.I.D.G-RING TONGUE,
WIRE SIZE: 16-14 AWG

SIZE A3

CAGE CODE 00779

DRAWING NO C-328998

RESTRICTED TO -

SCALE 6:1

SHEET 1 OF 1

REV J4

1470-19 (1/15)