

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	J3	ECR-26-272619	04MAR2026	ABS	PS

D

C

B


A

D

C


B

A

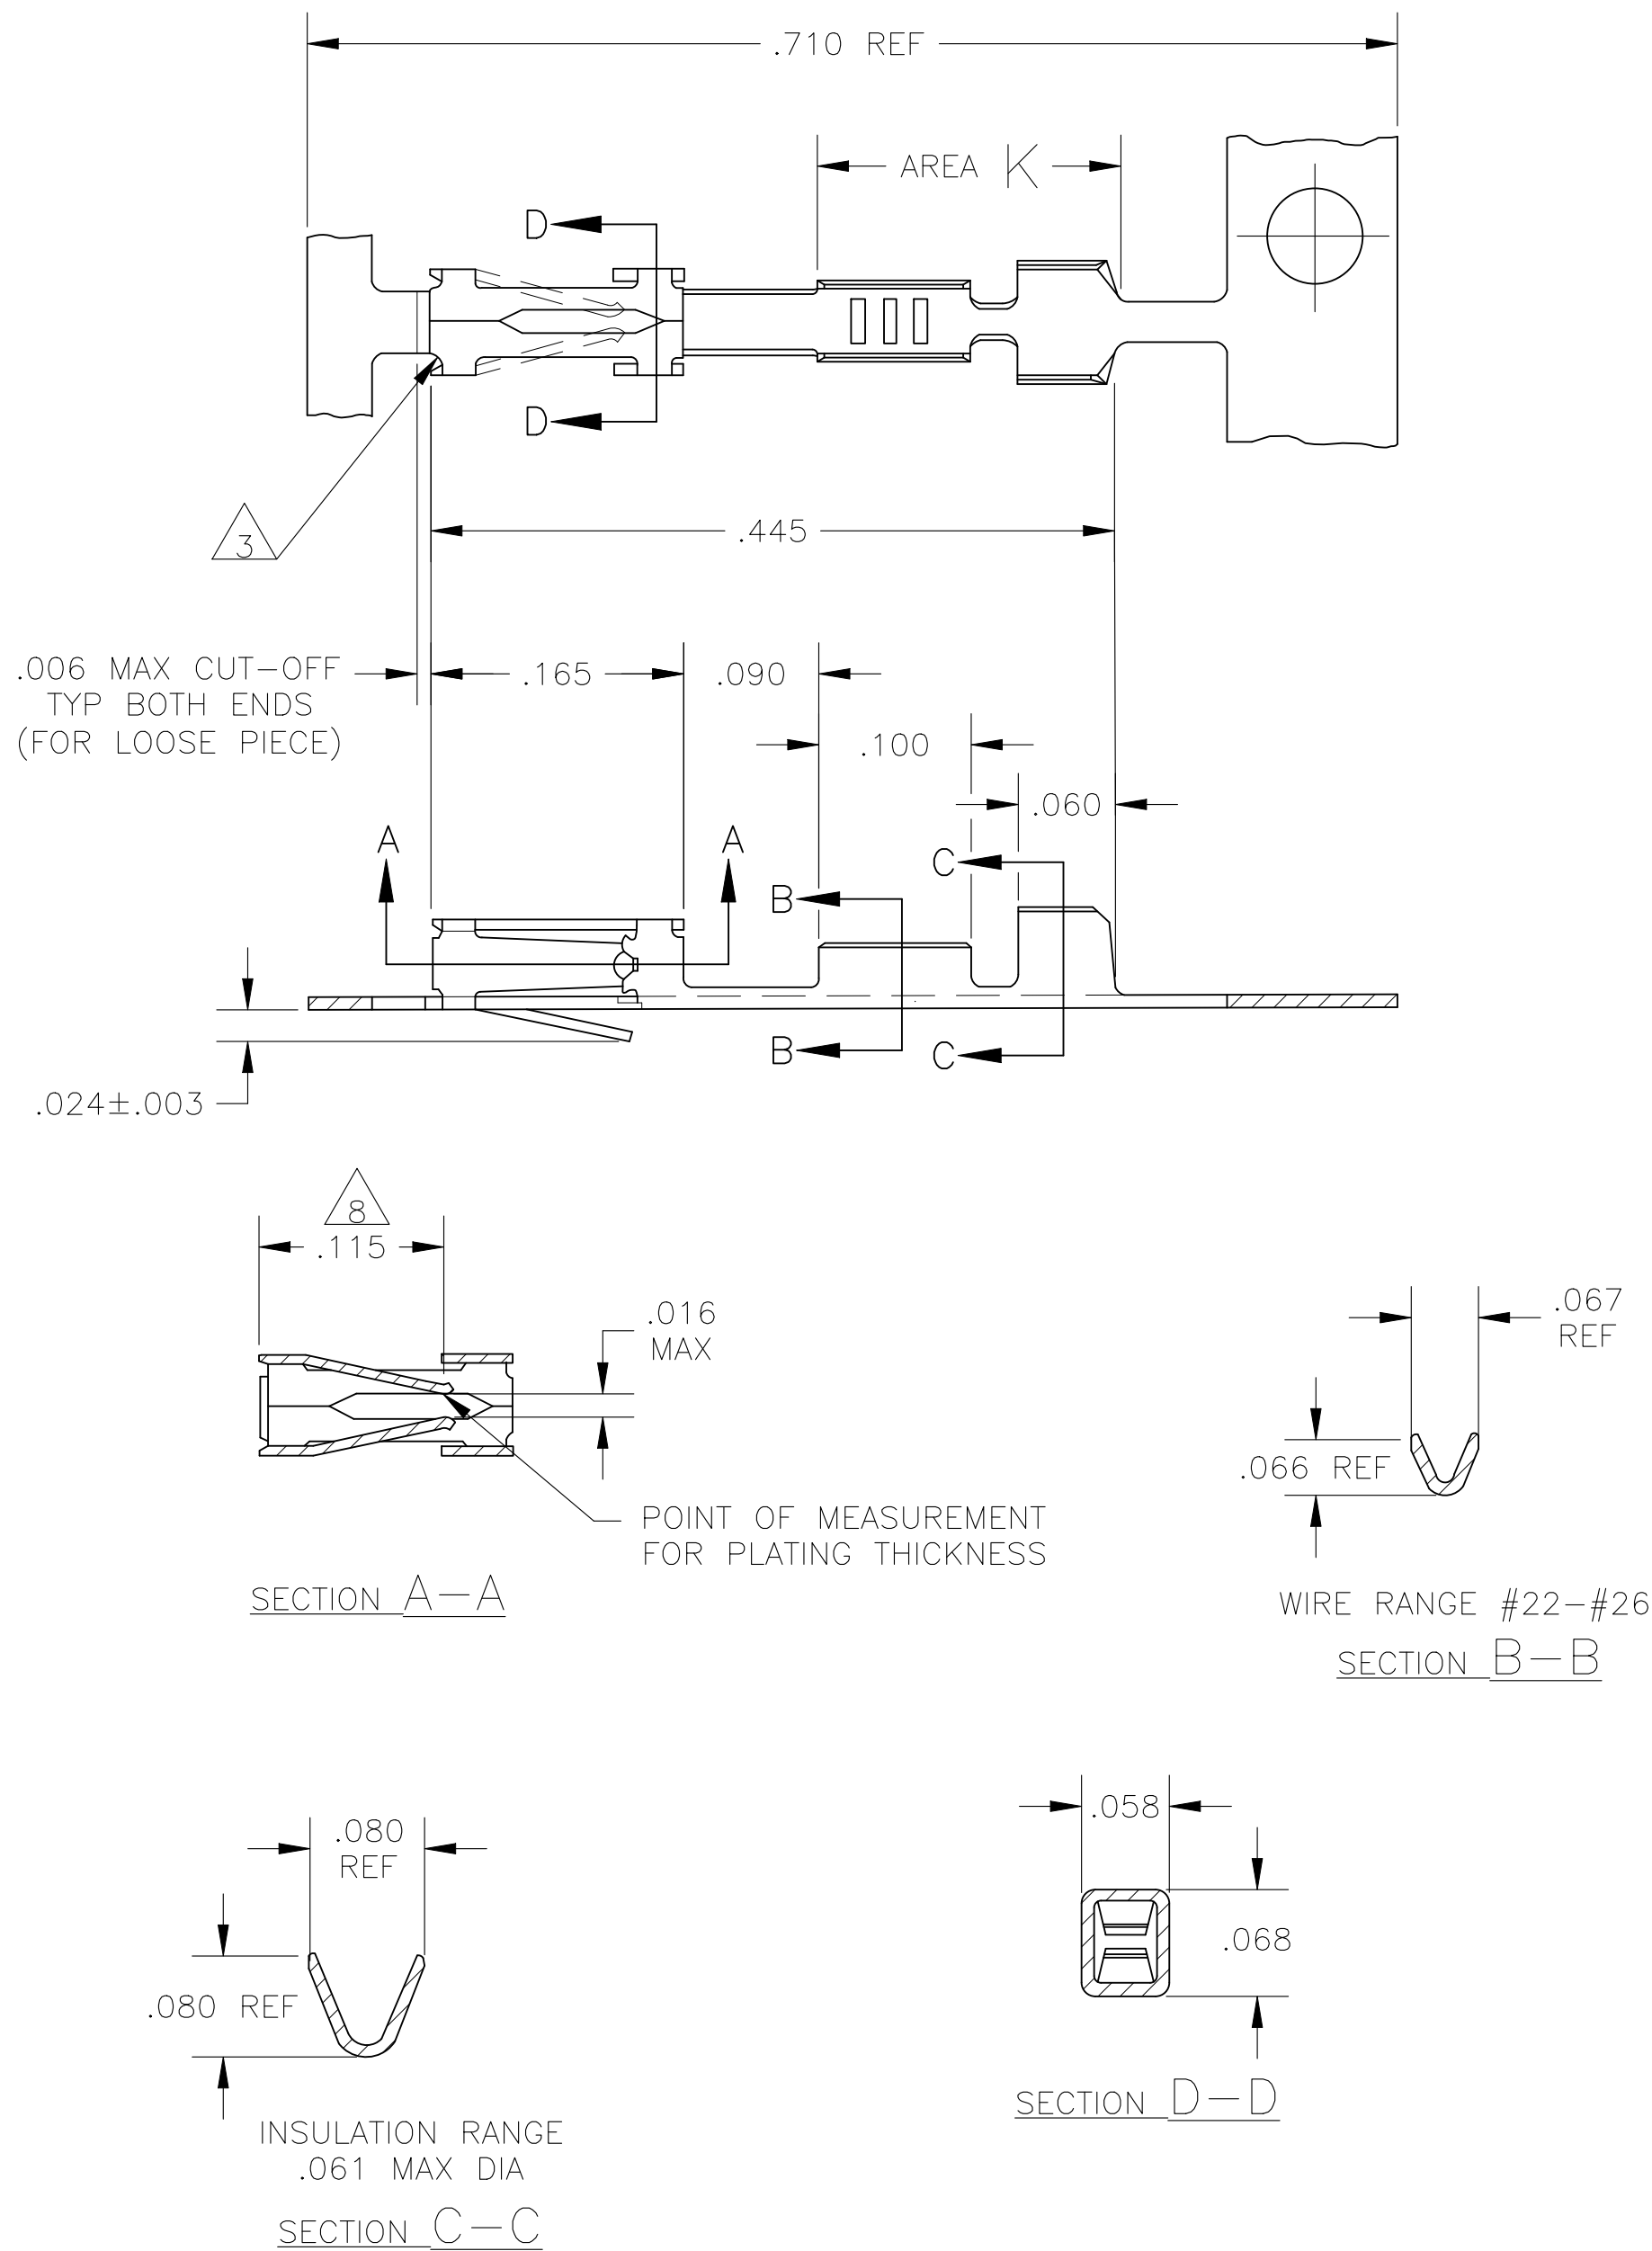

- REELED FOR MINI APPLICATOR.
- CUT OUTS ON BOX AT MANUFACTURER'S OPTION.
- .000015 GOLD ON CONTACT AREA, .000100-.000200 BRIGHT TIN OR BRIGHT TIN-LEAD IN CRIMP AREA K, ALL OVER .000050 NICKEL.
- .000030 GOLD ON CONTACT AREA, .000100-.000200 BRIGHT TIN OR BRIGHT TIN-LEAD IN CRIMP AREA K, ALL OVER .000050 NICKEL.
- SHEARED EDGES PERMITTED TO BE UNPLATED.
- .000100-.000200 BRIGHT TIN-LEAD OVER .000030 NICKEL.
- POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- OBSOLETE PART NUMBER
- NOTE DELETED.
- .000015 GOLD ON CONTACT AREA, MATTE TIN IN CRIMP AREA K, ALL OVER .000050 NICKEL.
- .000030 GOLD ON CONTACT AREA, MATTE TIN IN CRIMP AREA K, ALL OVER .000050 NICKEL.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

5-103171-5		5-103171-4
5-103171-2		5-103171-1
-8		-7
103171-5		103171-4
103171-2		103171-1
LOOSE PIECE PART NO	FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN — 31 MAR 83		 TE Connectivity									
		CHK — —											
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD — 11 APR 83		NAME							
		0 PLC ± —		PRODUCT SPEC		CONTACT, RECEPTACLE, MOD IV 1/2 CRIMP SNAP-IN FOR 22-26 AWG WIRE							
		1 PLC ± —		—									
		2 PLC ± —		—									
		3 PLC ± .005		APPLICATION SPEC									
		4 PLC ± —		—									
ANGLES ± —				SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
MATERIAL CU-SN-P ALLOY 521 .008 THK. COML.		FINISH SEE TABLE		WEIGHT —		A2		00779		C=103171		—	
CUSTOMER DRAWING				SCALE		8:1		SHEET		1 of 1		REV J3	

103171