


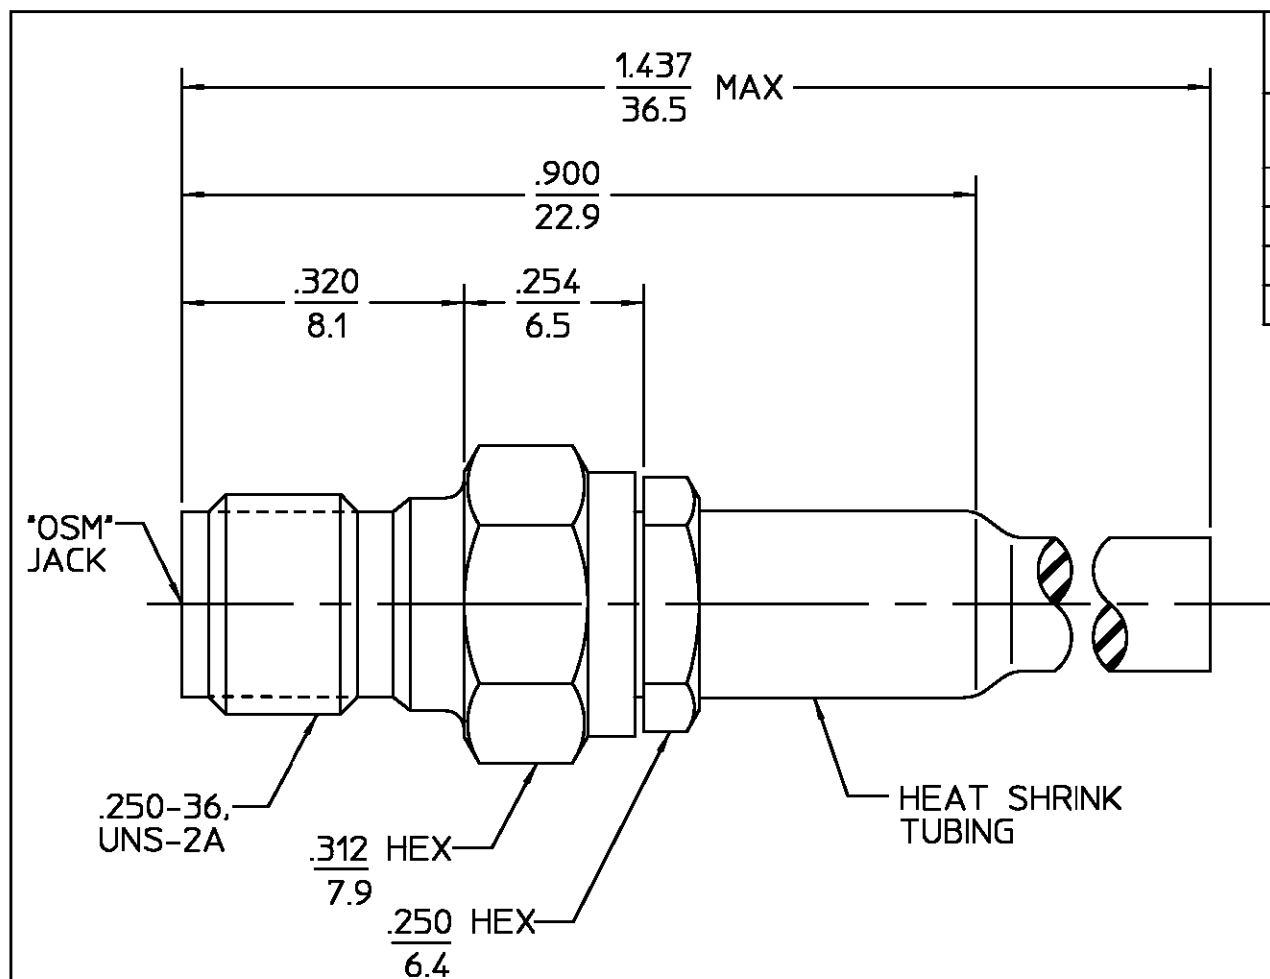

DESIGNED FOR USE WITH RG-188/U		REVISIONS			
		REV	DESCRIPTION	DATE	APPROVED
CABLE ENTRY DIAMETER MINIMUM		01 ₂	REVISED	9/13/2006	
CONTACT	.021				
DIELECTRIC	.023				
SLEEVE	.066				
FERRULE	.125				

HOUSING CLAMP NUT SLEEVE	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER QQ-P-35								
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A								
CENTER CONTACT	BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204								
O-RING	SILICONE RUBBER PER ZZ-R-765	N/A								
SHRINK TUBING	HEAT SHRINKABLE POLYOLEFIN COMPOUND MIL-I-23053/4	N/A								
FERRULE	COPPER OR BRASS ALLOY ROCKWELL F65 MAXIMUM	GOLD PLATE PER MIL-G-45204								
COMPONENT	MATERIAL	FINISH								
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES <table><tr><td>FRAC. ± 1/64</td><td>DEC. ±.005</td><td>ANGLES ± 1°</td></tr></table> These drawings and speci- fications are the property of M/A COM Interconnect Div. and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale o f item(s) without written permission.			FRAC. ± 1/64	DEC. ±.005	ANGLES ± 1°					
FRAC. ± 1/64	DEC. ±.005	ANGLES ± 1°								
DRAWN BY FMC CHECKED BY KWW APPD BY RMF DATE 9/15/77 9/21/77 9/21/77 AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599 USE ASS'Y PROCEDURE 408-04808 (20-057) NO. A.P. TITLE "OSM" STRAIGHT CABLE JACK CRIMP-CLAMP ATTACHMENT <table><tr><td>SIZE B</td><td>CODE IDENT NO. 26805</td><td>2032-5003-02</td><td>REV 01₂</td></tr><tr><td colspan="2">SCALE 5:1</td><td colspan="2">SHEET 1 OF 1</td></tr></table>			SIZE B	CODE IDENT NO. 26805	2032-5003-02	REV 01 ₂	SCALE 5:1		SHEET 1 OF 1	
SIZE B	CODE IDENT NO. 26805	2032-5003-02	REV 01 ₂							
SCALE 5:1		SHEET 1 OF 1								

NOTES:
1. CAPTURED CENTER CONTACT

.XXX = in
XX.X = mm (REF)