


© - TE Connectivity. All Rights Reserved.

P.C.B. HOLE DIM. ACTION PIN
DRILLED HOLE :1,15 ±0,025 mm
FIN. HOLE :0,94 to 1,09 mm
AFTER REFLOW :0,91 to 1,09 mm
Cu-thks :0,025 to 0,075 mm
Sn-thks :0,004 to 0,010 mm

REFERENCE FAMILY DRAWING 650473
FOR ALL TYPE C HEADER OFFERINGS

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G	REVISED PER ECR-25-265528	16DEC2025	MK	AK

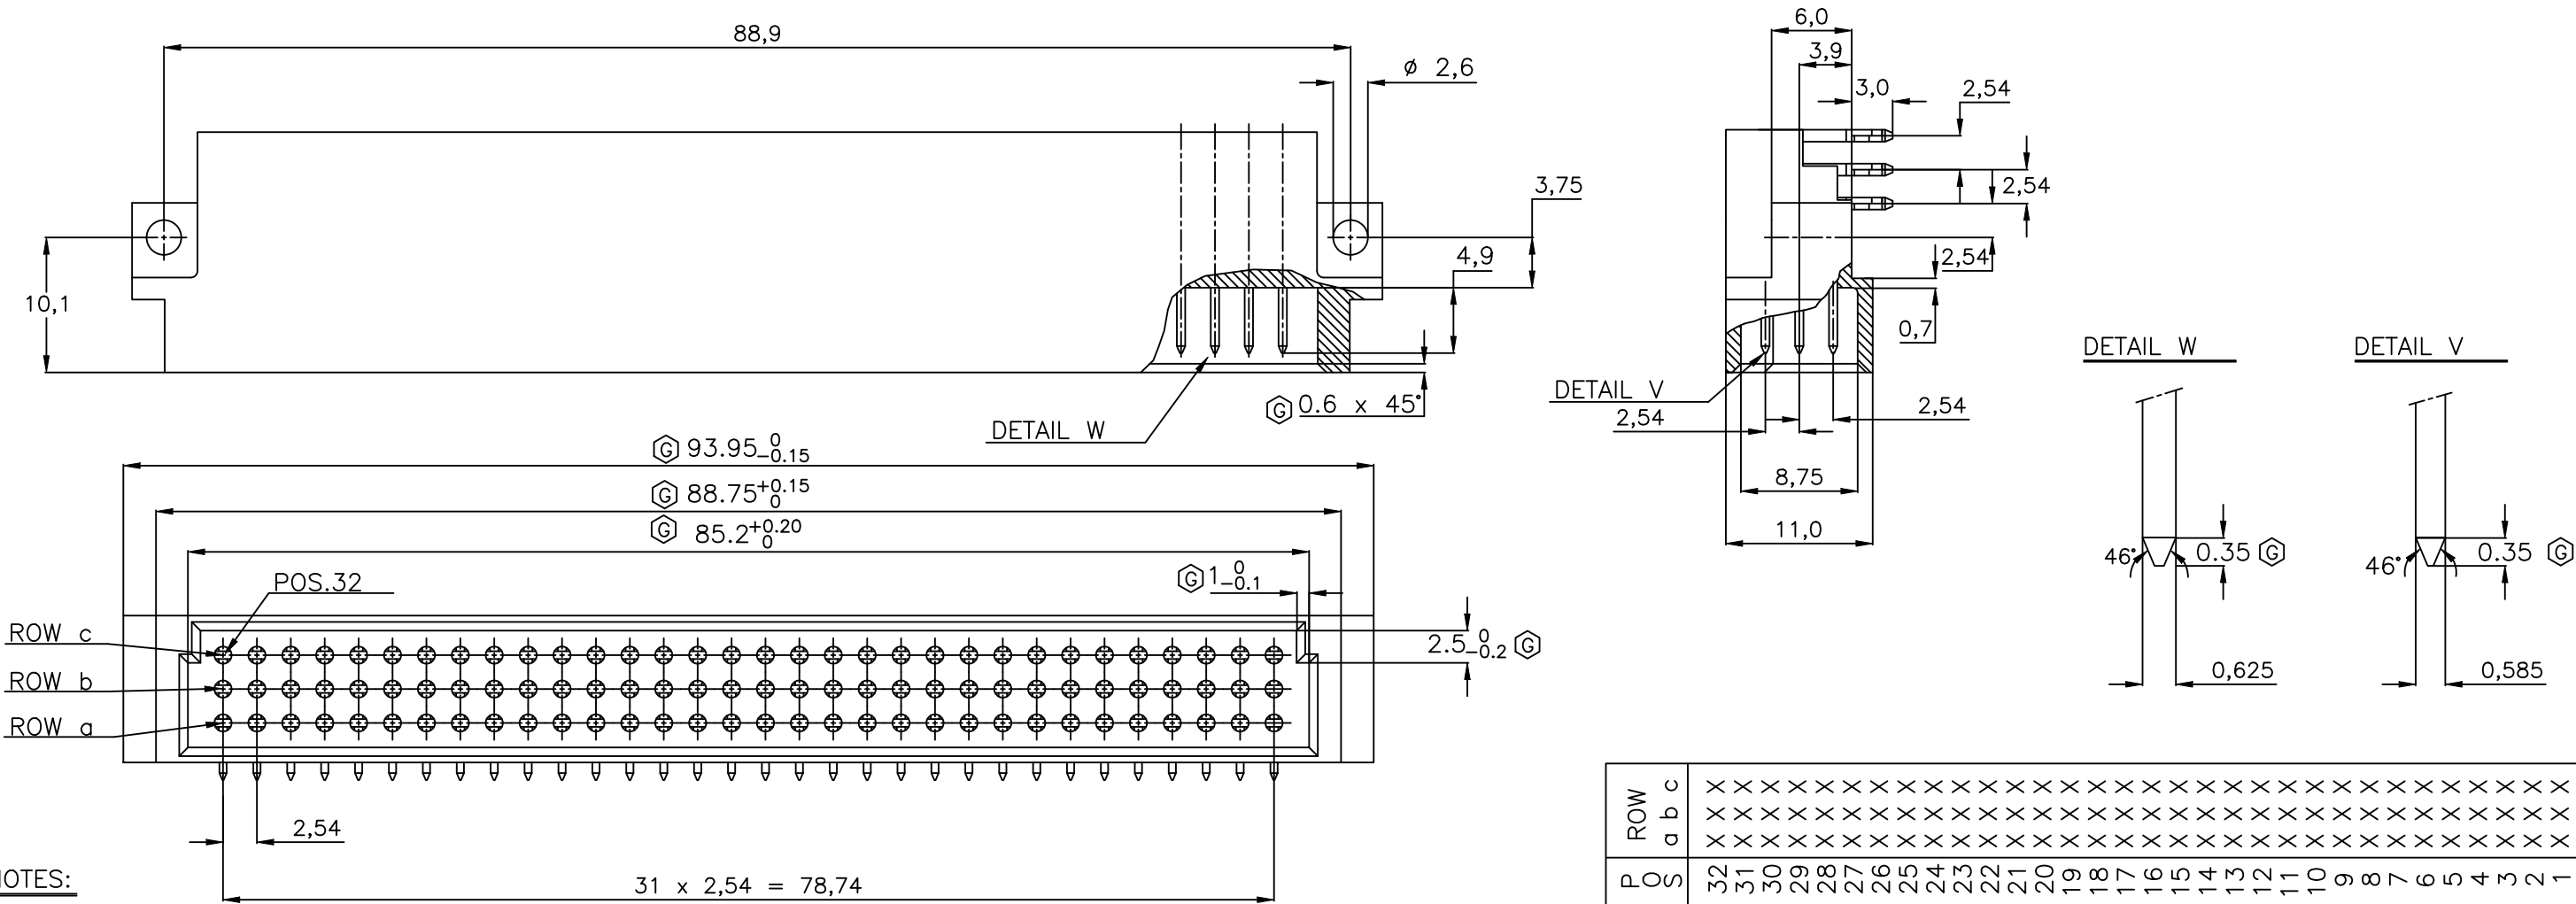

- NOTES:
- 1 MATERIAL:
-HOUSING: THERMOPL.POLYESTER
COLOUR : GREY
-CONTACTS: PHOSPHORBRONZE
- 2 PLATING CONTACT : Ⓞ
-1 : MEETS CLASS I PERFORMANCE
-4 : MEETS CLASS II PERFORMANCE

AN ASTERISK „X” DENOTES A CONTACT.

OBSOLETE	SEE NOTE 2	SEE NOTE 1	215605-9
OBSOLETE	SEE NOTE 2	SEE NOTE 1	215605-8
OBSOLETE	SEE NOTE 2	SEE NOTE 1	215605-7
	SEE NOTE 2	SEE NOTE 1	215605-4
	SEE NOTE 2	SEE NOTE 1	215605-1
	SEE NOTE	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.v.LOKVEN 16DEC86		
		CHK J.GIBBELS		
DIMENSIONS: mm		APVD	NAME	
		PRODUCT SPEC	96 POS. DIN 41612 TYPE C-MALE CONN. WITH ACTION PIN FOR 1,6 P.C.B. THK'S	
		APPLICATION SPEC		
MATERIAL		WEIGHT 0.000000	SIZE A3	CAGE CODE 00779
			DRAWING NO C=215605	RESTRICTED TO
		CUSTOMER DRAWING	SCALE NTS	SHEET 1 OF 1
				REV G