

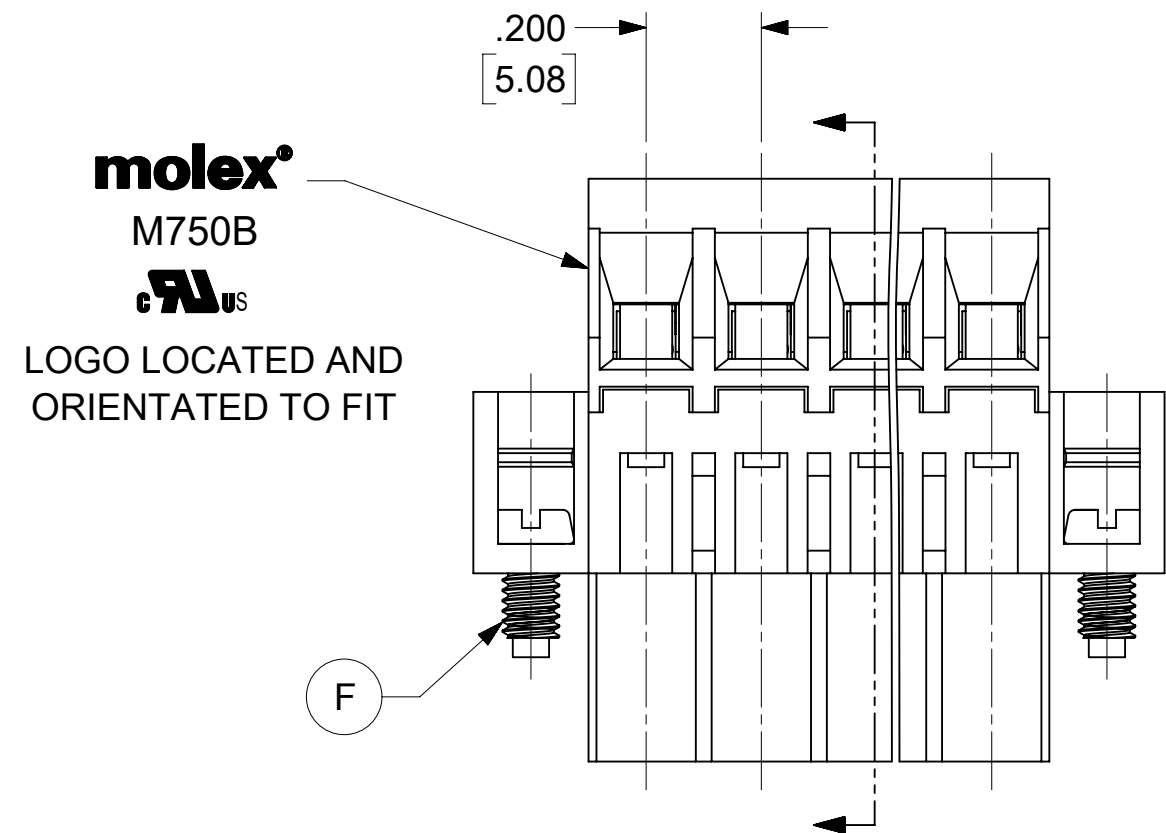


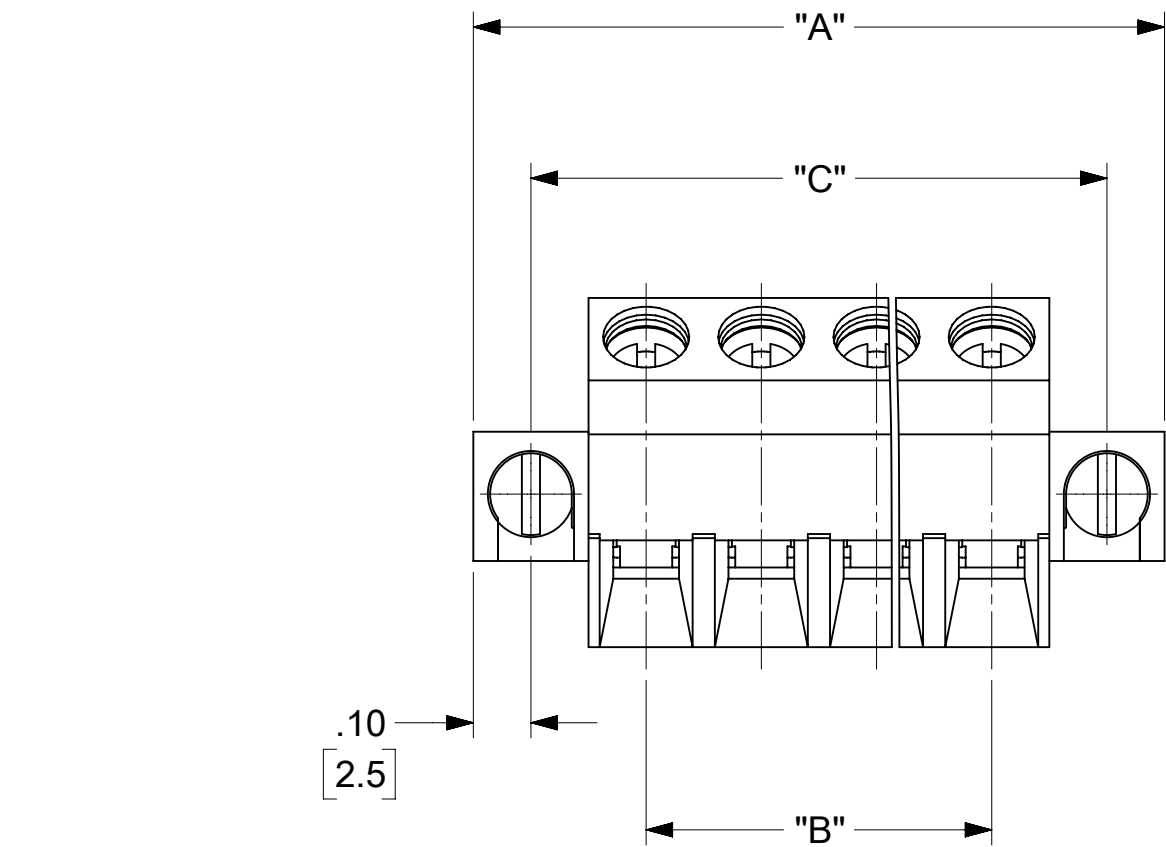

SPECIFICATIONS:

- MATERIAL:
 - SCREW: M2.5 STEEL, ZINC PLATED
 - BODY : PA66, UL94 V-0
 - BLOCK: BRASS, NI PLATED
 - COVER: PA66, UL94 V-0
 - CONTACT : COPPER ALLOY
 - MTG. SCREW: M2.5 STEEL, ZINC PLATED
- WIRE SIZE: 30 TO 12AWG
- ELECTRICAL RATING : 300V, 18A
- MAX TORQUE : 5.0LBF. IN
- WIRE STRIP LENGTH: .24 IN. (6.00mm)
- OPERATING TEMPERATURE:-40°C TO +115°C

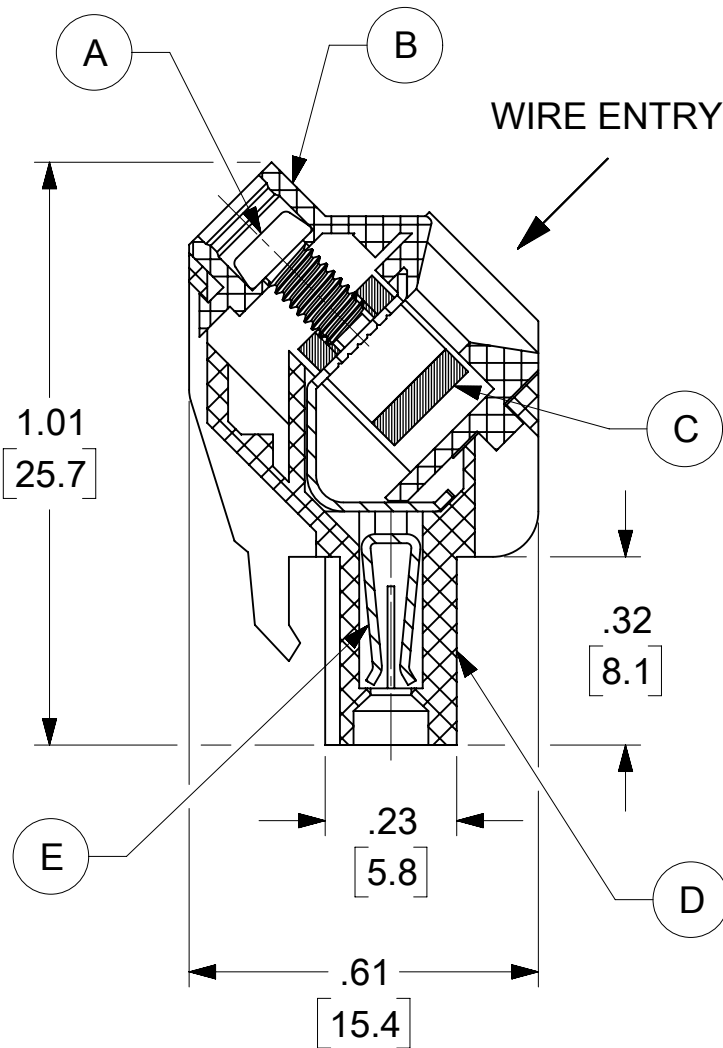

ENGINEERING NUMBER LEGEND

M750B - 14 - 2 - XX - X

SERIES STYLE PITCH POLES COLOR
1- BLACK
3- GREEN

CONTACT FACTORY FOR OPTIONAL COLORS

TOLERANCES			
MM	TOL	INCH	TOL
0-6	±0.25	0-.24	±.010
>6-30	±0.40	>.24-1.18	±.016
>30-120	±0.50	>1.18-4.76	±.020
>120	±0.80	>4.76	±.031

FUNCTIONAL SYMBOLS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
= 0 = 0 = 0	DIMENSION UNITS	SCALE		CURRENT REV DESC: ADDED PNS 397141003, 397141005, 397141007 AND 397141009					molex TERMINAL PLUG 5.08MM 45 DEGREE WIRE ENTRY WITH MOUNTING ENDS						
	INCH/MM		3:1												
	GENERAL TOLERANCES (UNLESS SPECIFIED)														
DIVISIONAL SYMBOLS			MM	INCH	EC NO: 760931 DRWN: ABENJAMINLW 2023/07/06 CHK'D: DNGUYEN62 2023/08/29 APPR: WLEUNG 2023/08/30					PRODUCT CUSTOMER DRAWING					
	4 PLACES	±	---	±										---	
	3 PLACES	±	---	±										SEE CHART	
	2 PLACES	±	SEE CHART	±	SEE CHART	INITIAL REVISION: DRWN: RSTONE 2014/04/11 APPR: JFMURPHY 2014/10/16					DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
	1 PLACE	±	SEE CHART	±	---						SD-39714-001		PSD	001	B
	0 PLACES	±	---	±	---										
	ANGULAR TOL		±	---	THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER			
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS						C-SIZE	39714	SEE SHEET-2	GENERAL MARKET		1 OF 2				

[illegible]