



**M12 Connector**

TE Internal #: T4110402041-000

Cable-to-Cable, 4 Position, Sealable, Wire & Cable, Signal, Cable Mount (Free-Hanging), Reverse Gender, M12 Connector, Standard Circular Connectors

[View on TE.com >](#)

Connectors > Circular Connectors > Standard Circular Connectors > M12 Field Installable Unshielded



Connector System: **Cable-to-Cable**

Connector Mounting Type: **Cable Mount (Free-Hanging)**

Number of Positions: **4**

Sealable: **Yes**

Connector & Contact Terminates To: **Wire & Cable**

[All M12 Field Installable Unshielded \(102\)](#)

**Features**

**Product Type Features**

Connector System	Cable-to-Cable
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Receptacle
Shell Type	Plastic
Assembly Requirement	Factory Assembled
Circular Connector Shell Type	All Plastic
Connector Product Type	Connector Assembly
Assembly Type	Electrical Connector

**Mechanical Attachment**

Connector Mounting Type	Cable Mount (Free-Hanging)
Polarization Code	B
Mating Alignment Type	Keyed



Mating Retention Type	Threaded Coupling
-----------------------	-------------------

Mating Alignment	With
------------------	------

### Configuration Features

Number of Positions	4
---------------------	---

Number of Power Positions	0
---------------------------	---

Number of Signal Positions	4
----------------------------	---

Contacts Preloaded	Yes
--------------------	-----

Factory Installed Backshell	No
-----------------------------	----

### Contact Features

Contact Current Rating (Max)	4 A
------------------------------	-----

Reverse Gender	Yes
----------------	-----

Circular Connector Contact Type	Socket
---------------------------------	--------

### Operation/Application

Circuit Application	Signal
---------------------	--------

Shielded	No
----------	----

Durability Rating	100 Cycles
-------------------	------------

### Body Features

Shell Plating Material	Unplated
------------------------	----------

Shell Base Material	Plastic
---------------------	---------

Circular Connector Insulation Material Type	Polyamide 66 GF25
---	-------------------

Hermetically Sealed	Yes
---------------------	-----

O-Ring Material	Silicone
-----------------	----------

Environmental Protection	IP67
--------------------------	------

Environmental Protection Type	Elastomer Sealed
-------------------------------	------------------

Primary Product Color	Black
-----------------------	-------

Peripheral Seal Material	Silicone
--------------------------	----------

### Dimensions

Wire Size	.75 – .25 mm <sup>2</sup>
-----------	---------------------------

### Housing Features

Circular Connector Shell Size	20
-------------------------------	----

### Usage Conditions

Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
-----------------------------	---------------------------



IP Dust Sealing Level	6
-----------------------	---

IP Water Sealing Level	IP67
------------------------	------

### Other

EU RoHS Compliance	Compliant with Exemptions
--------------------	---------------------------

EU ELV Compliance	Compliant with Exemptions
-------------------	---------------------------

Field Serviceable	Yes
-------------------	-----

### Electrical Characteristics

Operating Voltage	250 VDC
-------------------	---------

### Industry Standards

UL Flammability Rating	UL 94HB
------------------------	---------

### Packaging Features

Packaging Quantity	1
--------------------	---

## Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
------------------------------	---------------------------

EU ELV Directive 2000/53/EC	Compliant with Exemptions
-----------------------------	---------------------------

China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
---	--------------------------------------

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (4% in Component Part)
--	--

**Article Safe Usage Statements:**

Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
-----------------	--

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # T4111402041-000  
M12, MALE, STRAIGHT, B CODE, 4P, PG9, GOLD



TE Part # 494577-E  
M12 MALE, B CODE, 4P, 17MM SMT



TE Part # 494705-E  
M12 MALE, B CODE, 4P, 10.5MM SMT


## Also in the Series | M12 Connector



Connector Hardware(11)



Connector Seals & Cavity Plugs(4)

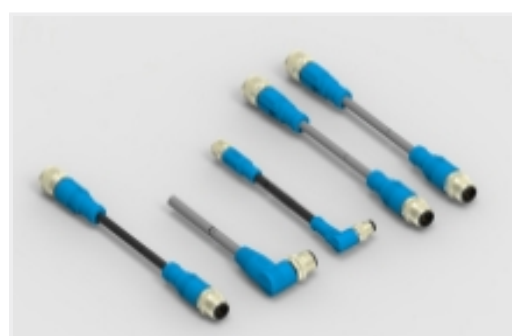

M8/M12 Cable Assemblies(230)



Standard Circular Connectors(793)

## Customers Also Bought




TE Part # T4110001031-000  
M12 Field Installable Unshielded



TE Part # T4132412041-000  
M12, FRONT MOUNT, MALE, B, 4P, SOLDER WIRE



TE Part # 794955-3  
VAL-U-LOK PIN PHBZ SN 22-18AWG

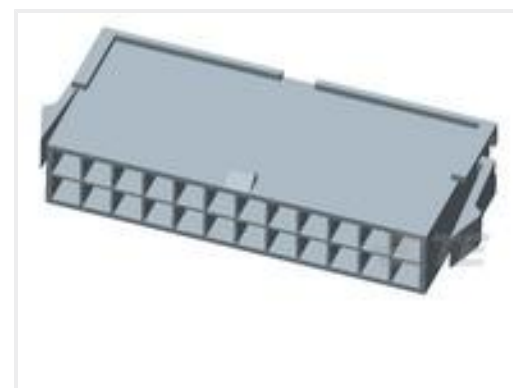


TE Part # 1969605-4  
4P PM PLUG VAL-U-LOK PM GW



TE Part # 2120958-1  
M8 MALE SOCKET WITH WIRES, 0.25 SQMM



TE Part # 5-6609107-1  
PS0S0DSX0=C1107

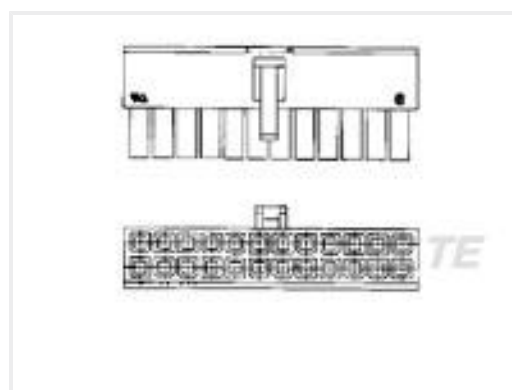

TE Part # 1586765-4  
4P RCPT VAL-U-LOK GW

## Documents

### Product Drawings



**M12,FEMALE,STRAIGHT,B CODE,4P,PG9,GOLD**

English

---

**CAD Files**

Customer View Model

[ENG\\_CVM\\_CVM\\_T4110402041-000\\_B.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_T4110402041-000\\_B.3d\\_stp.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_T4110402041-000\\_B.2d\\_dxf.zip](#)

English

**3D PDF**

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

**Datasheets & Catalog Pages**

[M8 / M12 Connector System Catalog](#)

English

---

**Product Specifications**

[Application Specification](#)

English

---

**Agency Approvals**

[UL](#)

English