

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

1723104203

Status:


Active

Overview:

Ultra-Fit Power Connectors

Description:

Ultra-Fit Right-Angle Header with Solder Nail, 3.50mm Pitch, Single Row, 3 Circuits, 0.38µm Gold (Au) Plating, Natural, Glow-Wire Capable

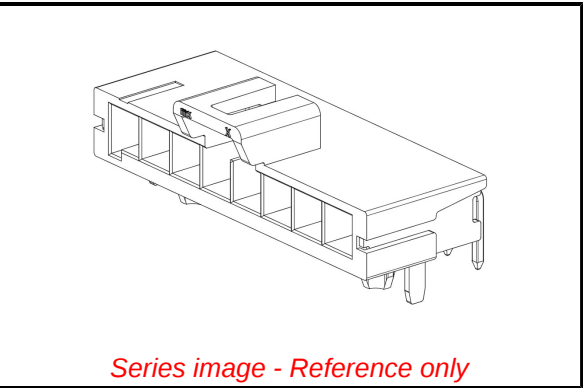

- Documents:
- 3D Model

3D Model (PDF)

Drawing (PDF)

Product Specification 1723230001-TS-000 (PDF)

Product Specification 1723231000-PS-CH-000 (PDF)

Product Specification 1723231000-PS-ES-000 (PDF)

Product Specification 1723231000-PS-JP-000 (PDF)

Product Specification 1723231000-PS-SK-000 (PDF)

Product Specification PS-172323-0001-001 (PDF)

Packaging Specification PK-172310-9001-001 (PDF)

Datasheet (PDF)

Symbol Footprint Data SYM-172310-3103-001 (PDF)

RoHS Certificate of Compliance (PDF)

General	
Product Family	PCB Headers
Series	172310
Application	Power, Wire-to-Board
Comments	See Product Specification for maximum current rating by circuit size and wire AWG
Component Type	PCB Header
Overview	Ultra-Fit Power Connectors
Product Name	Ultra-Fit
Taxonomy	PCB Headers and Receptacles
UPC	889056866408
Physical	
Breakaway	No
Circuits (Loaded)	3
Circuits (maximum)	3
Color - Resin	Natural
Durability (mating cycles max)	200
First Mate / Last Break	No
Glow-Wire Capable	Yes
Guide to Mating Part	No
Keying to Mating Part	Yes
Lock to Mating Part	Yes
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Liquid Crystal Polymer
Net Weight	1.320/g
Number of Rows	1
Orientation	Right Angle
PC Tail Length	3.20mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	3.50mm
Pitch - Termination Interface	3.50mm
Plating min - Mating	0.381µm
Plating min - Termination	1.524µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	Fully

EU ELV	
Not Relevant	
EU RoHS	
Compliant	
REACH SVHC	
Not Contained Per - D(2022)4187-DC (10 June 2022)	
Halogen-Free Status	
Low-Halogen	
For more information, please visit Contact US	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

172310 Series

Mates With

Ultra-Fit Receptacle Housing 1722564103

Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +120°C
Termination Interface: Style	Through Hole
Electrical	
Current - Maximum per Contact	12.0A
Voltage - Maximum	600V AC (RMS)/DC
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-172310-9001-001
Product Specification	1723230001-TS-000, 1723231000-PS-CH-000, 1723231000-PS-ES-000, 1723231000-PS-JP-000, 1723231000-PS-SK-000, PS-172323-0001-001
Sales Drawing	1723102000-000
Symbol/Footprint Data	SYM-172310-3103-001

This document was generated on 01/07/2023

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION