

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

2147531032

Status:


Active

Overview:

Micro-Fit Connector System

Description:

Micro-Fit 3.0 Male-to-Pigtail Off-the-Shelf (OTS) Cable Assembly, Single Row, 300.00mm Length, Tin (Sn) Plating, 3 Circuits, Black

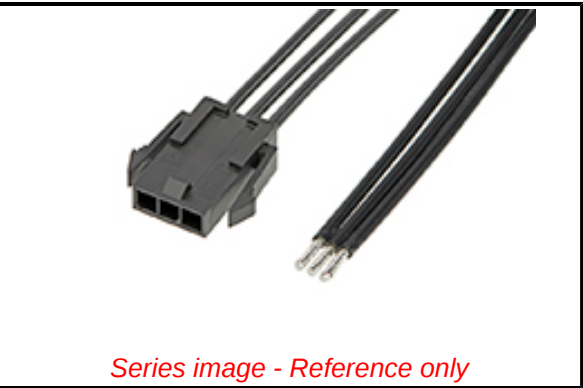

Documents:

[3D Model](#)

[Drawing \(PDF\)](#)

[3D Model \(PDF\)](#)

[Datasheet \(PDF\)](#)

[RoHS Certificate of Compliance \(PDF\)](#)

General	
Product Family	Cable Assemblies
Series	214753
Application	Power, Wire-to-Wire
Assembly Configuration	Dual Ended Connectors
Connector to Connector	Micro-Fit 3.0-to-Pigtail
Overmolded	No
Overview	Micro-Fit Connector System
Product Name	Micro-Fit 3.0
Taxonomy	Power and Signal Cable Assembl
Type	Discrete Wire Assembly
UPC	193264586141
Physical	
Cable Length	300.00mm
Circuits (Loaded)	3
Color - Resin	Black
Gender	Male-Pigtail
Lock to Mating Part	Yes
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Nylon
Net Weight	11.228/g
Number of Rows	1
Packaging Type	Bag
Pitch - Mating Interface	3.00mm
Plating min - Mating	1.016µm
Plating min - Termination	1.016µm
Single Ended	Yes
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.85mm max.
Wire Size AWG	18
Wire/Cable Type	Discrete Wire, UL 10002
Electrical	
Current - Maximum per Contact	8.5A
Voltage - Maximum	300V AC/DC
Material Info	
Reference - Drawing Numbers	
Sales Drawing	2147531031-000

EU ELV Not Relevant	
EU RoHS Compliant REACH SVHC Not Contained Per - D(2022)4187-DC (10 June 2022) Halogen-Free Status Not Low-Halogen	China RoHS
For more information, please visit Contact US	
China ROHS ELV RoHS Phthalates	Green Image Not Relevant Not Contained

Search Parts in this Series
214753 Series

Mates With
Micro-Fit 3.0 Receptacle Housing [43645](#)

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION