


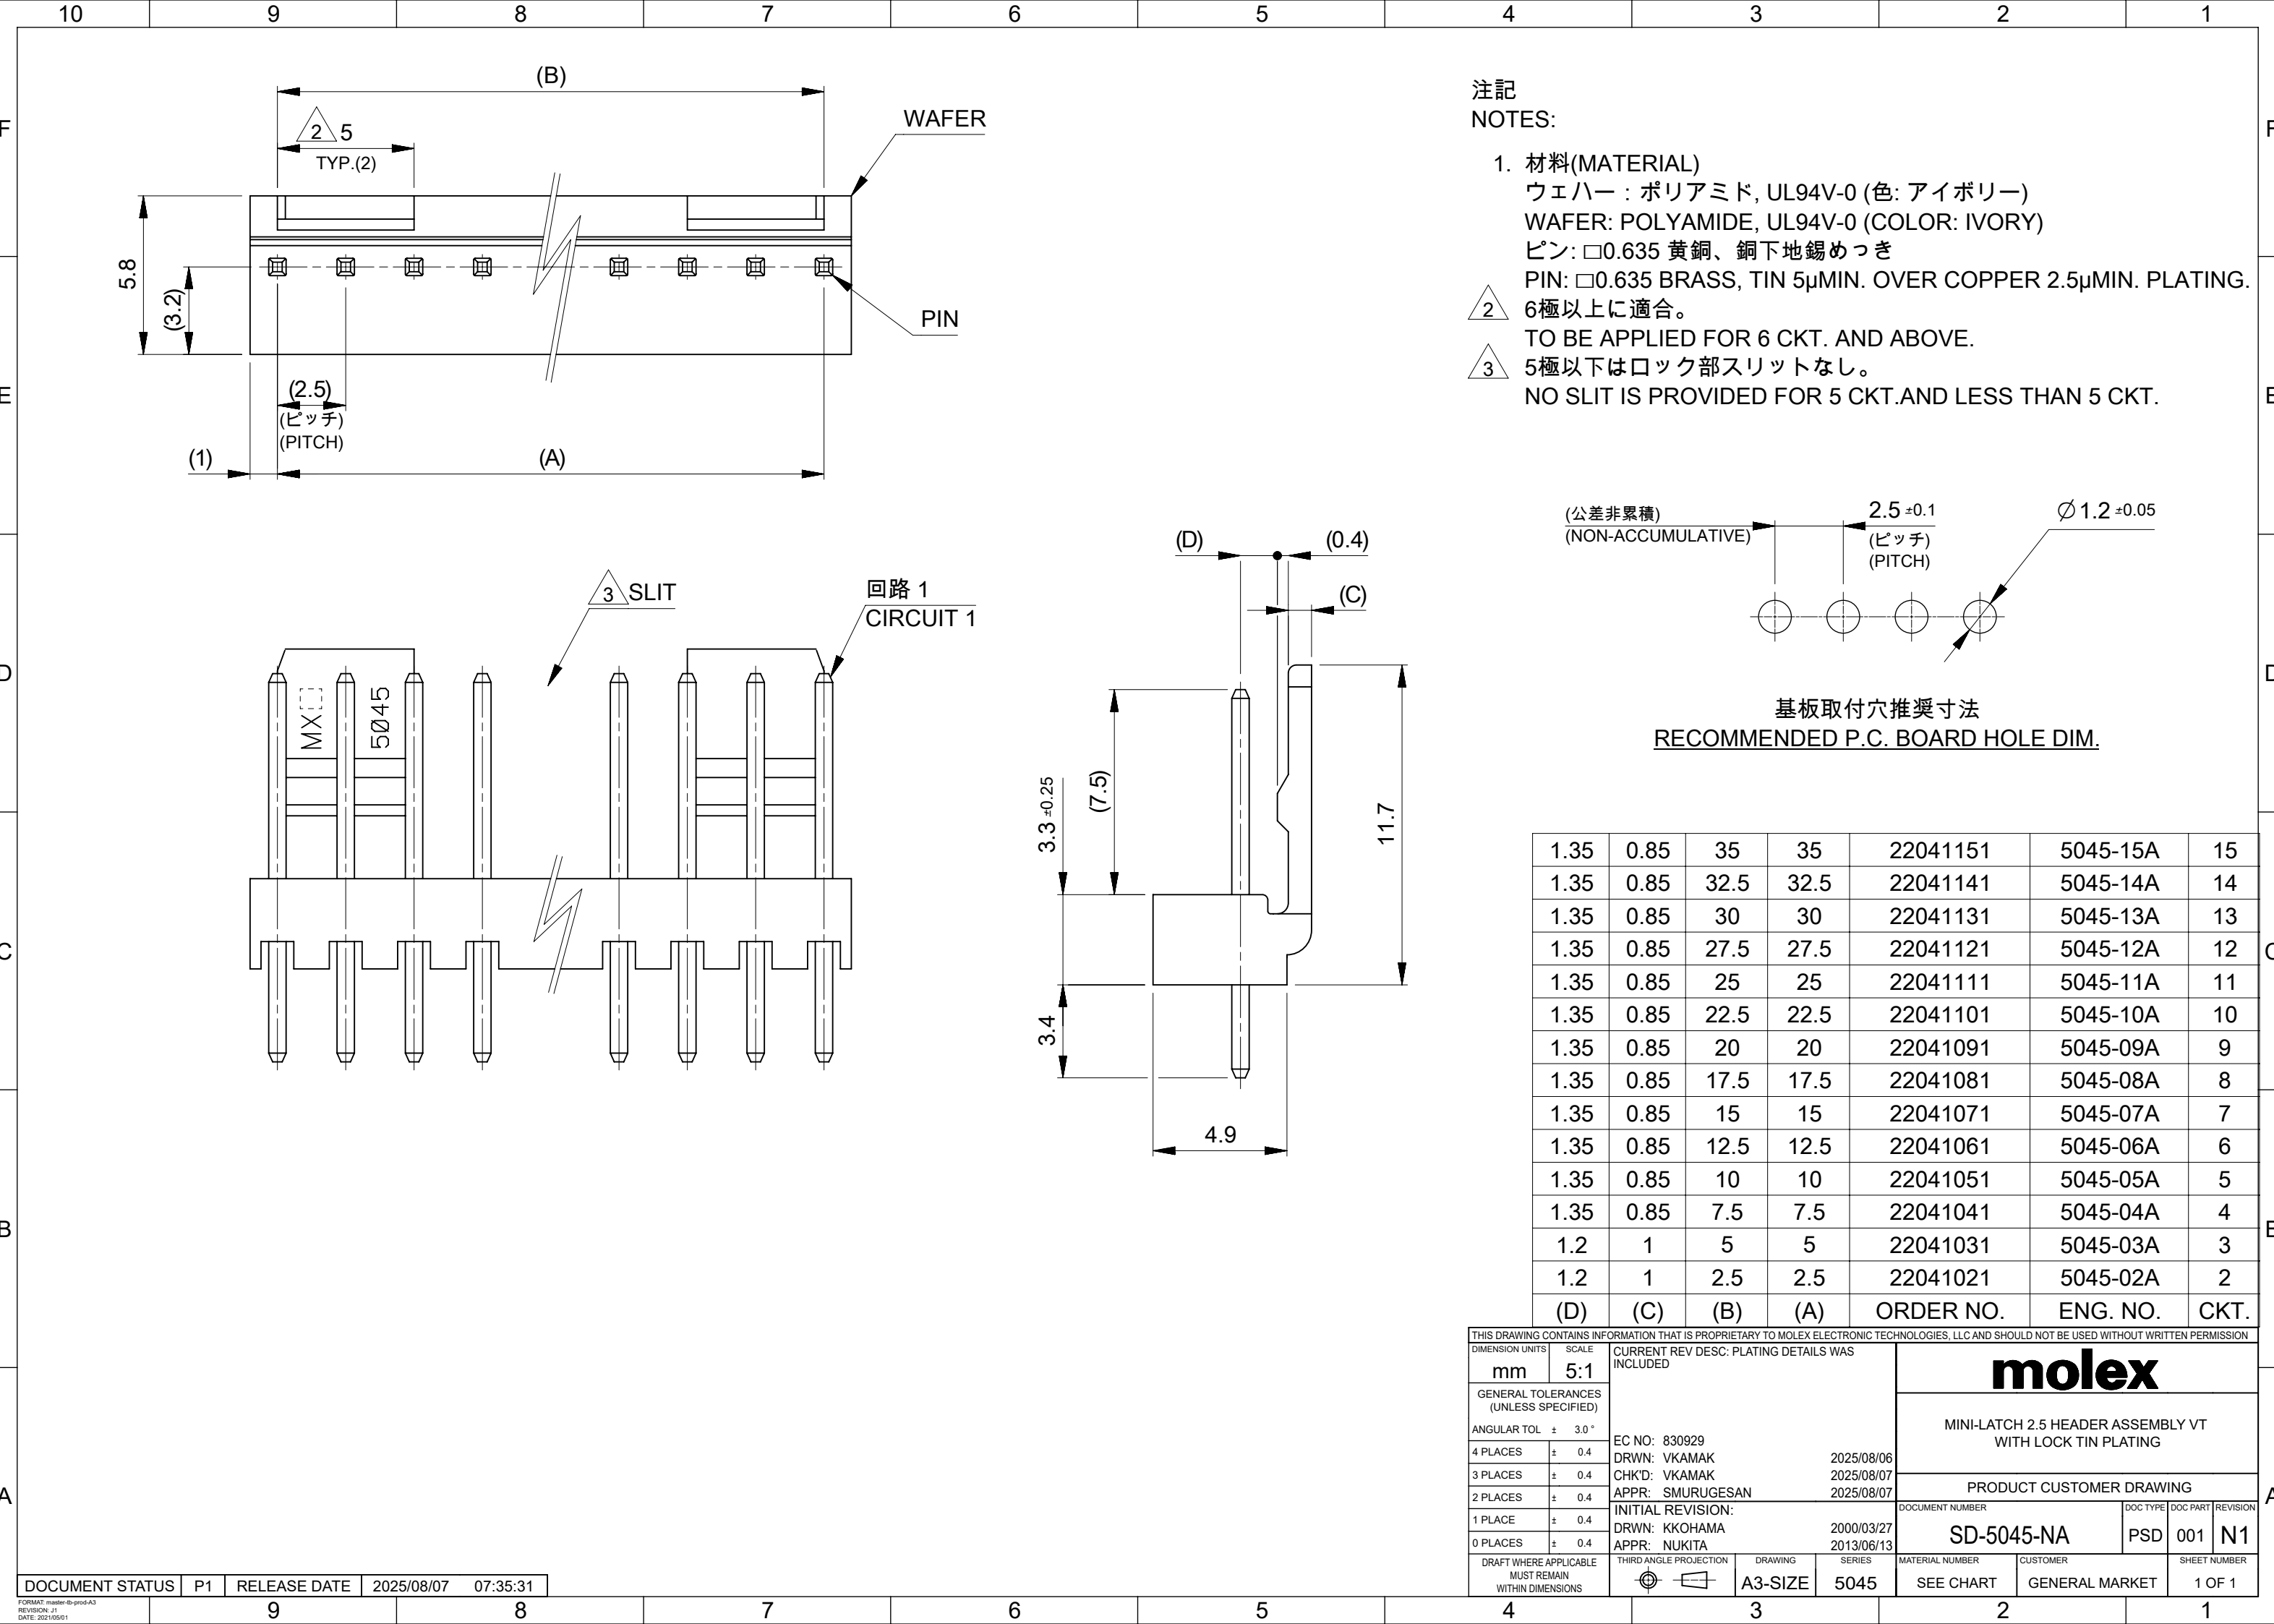

注記

NOTES:

1. 材料(MATERIAL)

ウェハー : ポリアミド, UL94V-0 (色: アイボリー)

WAFER: POLYAMIDE, UL94V-0 (COLOR: IVORY)

ピン: □0.635 黄銅、銅下地錫めっき

PIN: □0.635 BRASS, TIN 5μMIN. OVER COPPER 2.5μMIN. PLATING.

2


6極以上に適合。

TO BE APPLIED FOR 6 CKT. AND ABOVE.

3


5極以下はロック部スリットなし。

NO SLIT IS PROVIDED FOR 5 CKT. AND LESS THAN 5 CKT.

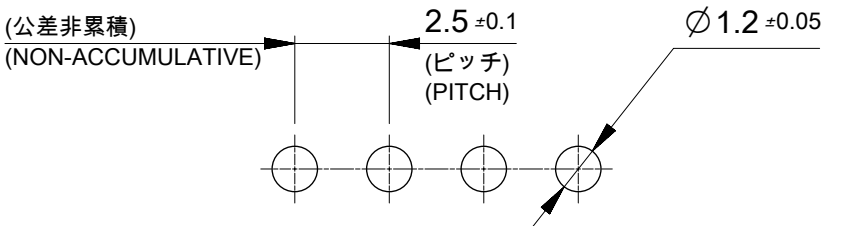

基板取付穴推奨寸法
RECOMMENDED P.C. BOARD HOLE DIM.

1.35	0.85	35	35	22041151	5045-15A	15
1.35	0.85	32.5	32.5	22041141	5045-14A	14
1.35	0.85	30	30	22041131	5045-13A	13
1.35	0.85	27.5	27.5	22041121	5045-12A	12
1.35	0.85	25	25	22041111	5045-11A	11
1.35	0.85	22.5	22.5	22041101	5045-10A	10
1.35	0.85	20	20	22041091	5045-09A	9
1.35	0.85	17.5	17.5	22041081	5045-08A	8
1.35	0.85	15	15	22041071	5045-07A	7
1.35	0.85	12.5	12.5	22041061	5045-06A	6
1.35	0.85	10	10	22041051	5045-05A	5
1.35	0.85	7.5	7.5	22041041	5045-04A	4
1.2	1	5	5	22041031	5045-03A	3
1.2	1	2.5	2.5	22041021	5045-02A	2
(D)	(C)	(B)	(A)	ORDER NO.	ENG. NO.	CKT.

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC: PLATING DETAILS WAS INCLUDED			molex MINI-LATCH 2.5 HEADER ASSEMBLY VT WITH LOCK TIN PLATING				
mm		5:1									
GENERAL TOLERANCES (UNLESS SPECIFIED)											
ANGULAR TOL ± 3.0 °											
4 PLACES		± 0.4		EC NO: 830929							
3 PLACES		± 0.4		DRWN: VKAMAK 2025/08/06							
2 PLACES		± 0.4		CHK'D: VKAMAK 2025/08/07							
1 PLACE		± 0.4		APPR: SMURUGESAN 2025/08/07							
0 PLACES		± 0.4		INITIAL REVISION:			PRODUCT CUSTOMER DRAWING				
				DRWN: KKOHAMA 2000/03/27			DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION
				APPR: NUKITA 2013/06/13			SD-5045-NA		PSD	001	N1
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER		SHEET NUMBER
						A3-SIZE	5045	SEE CHART	GENERAL MARKET		1 OF 1