




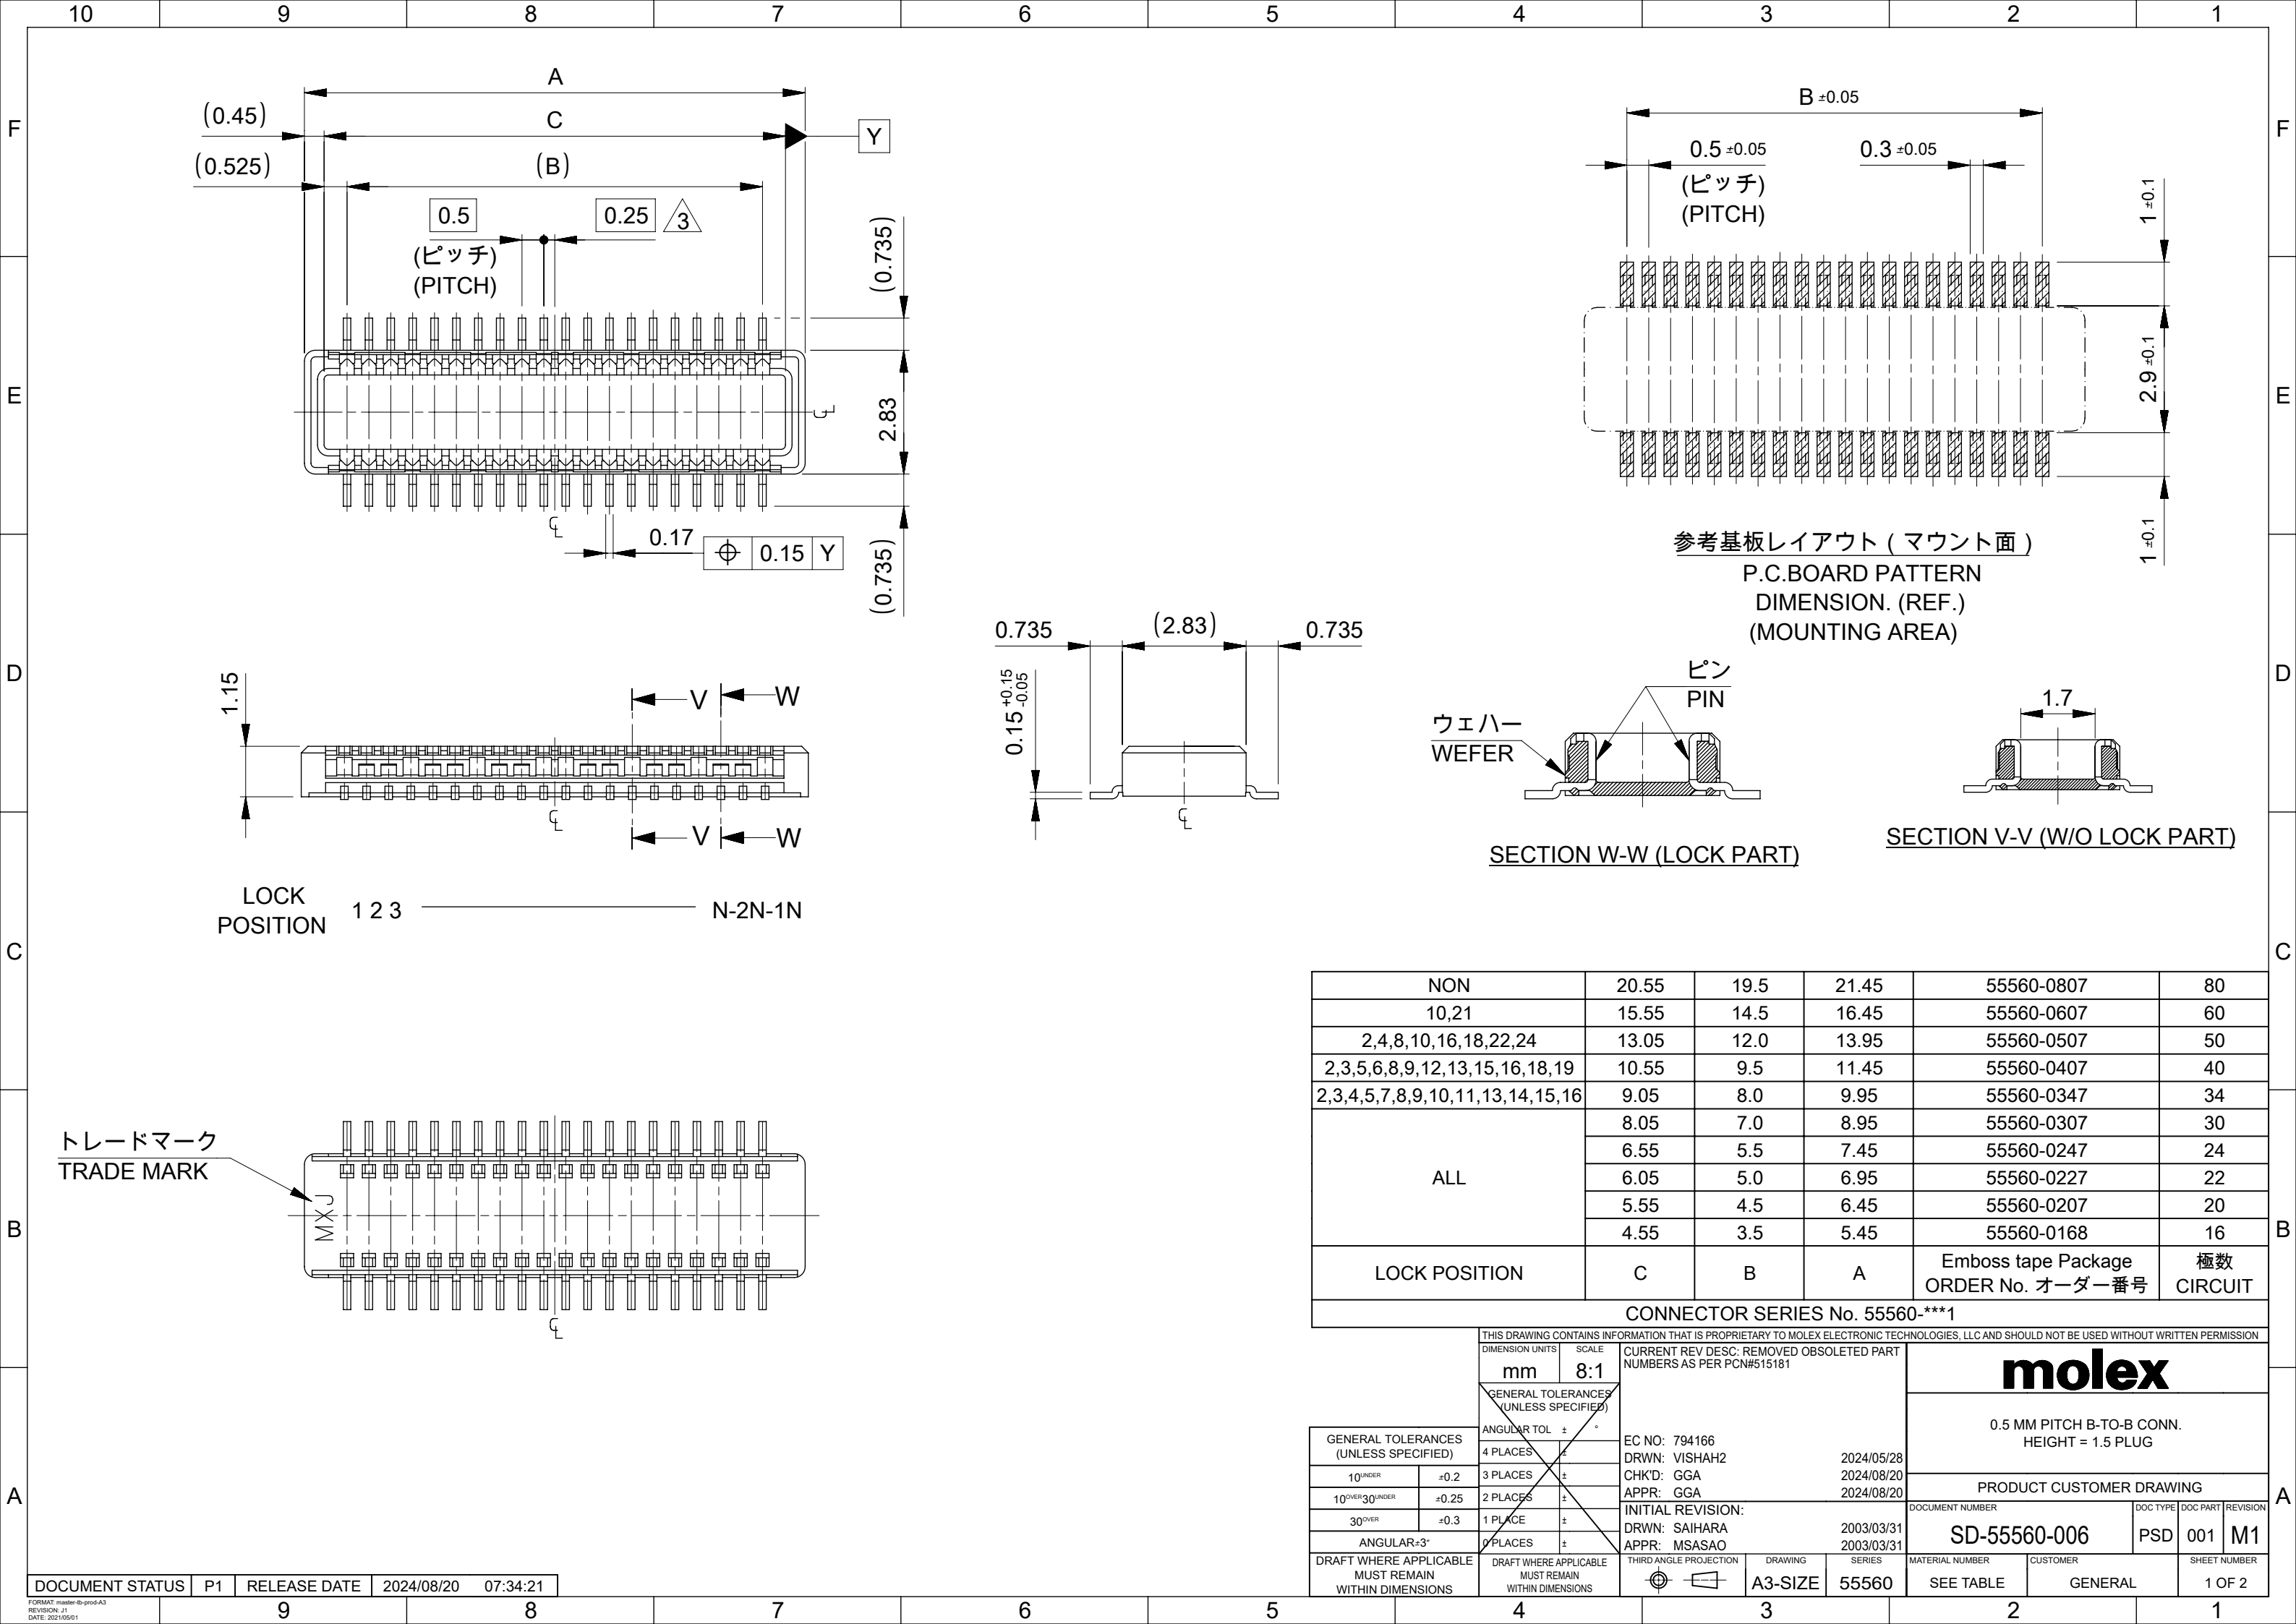


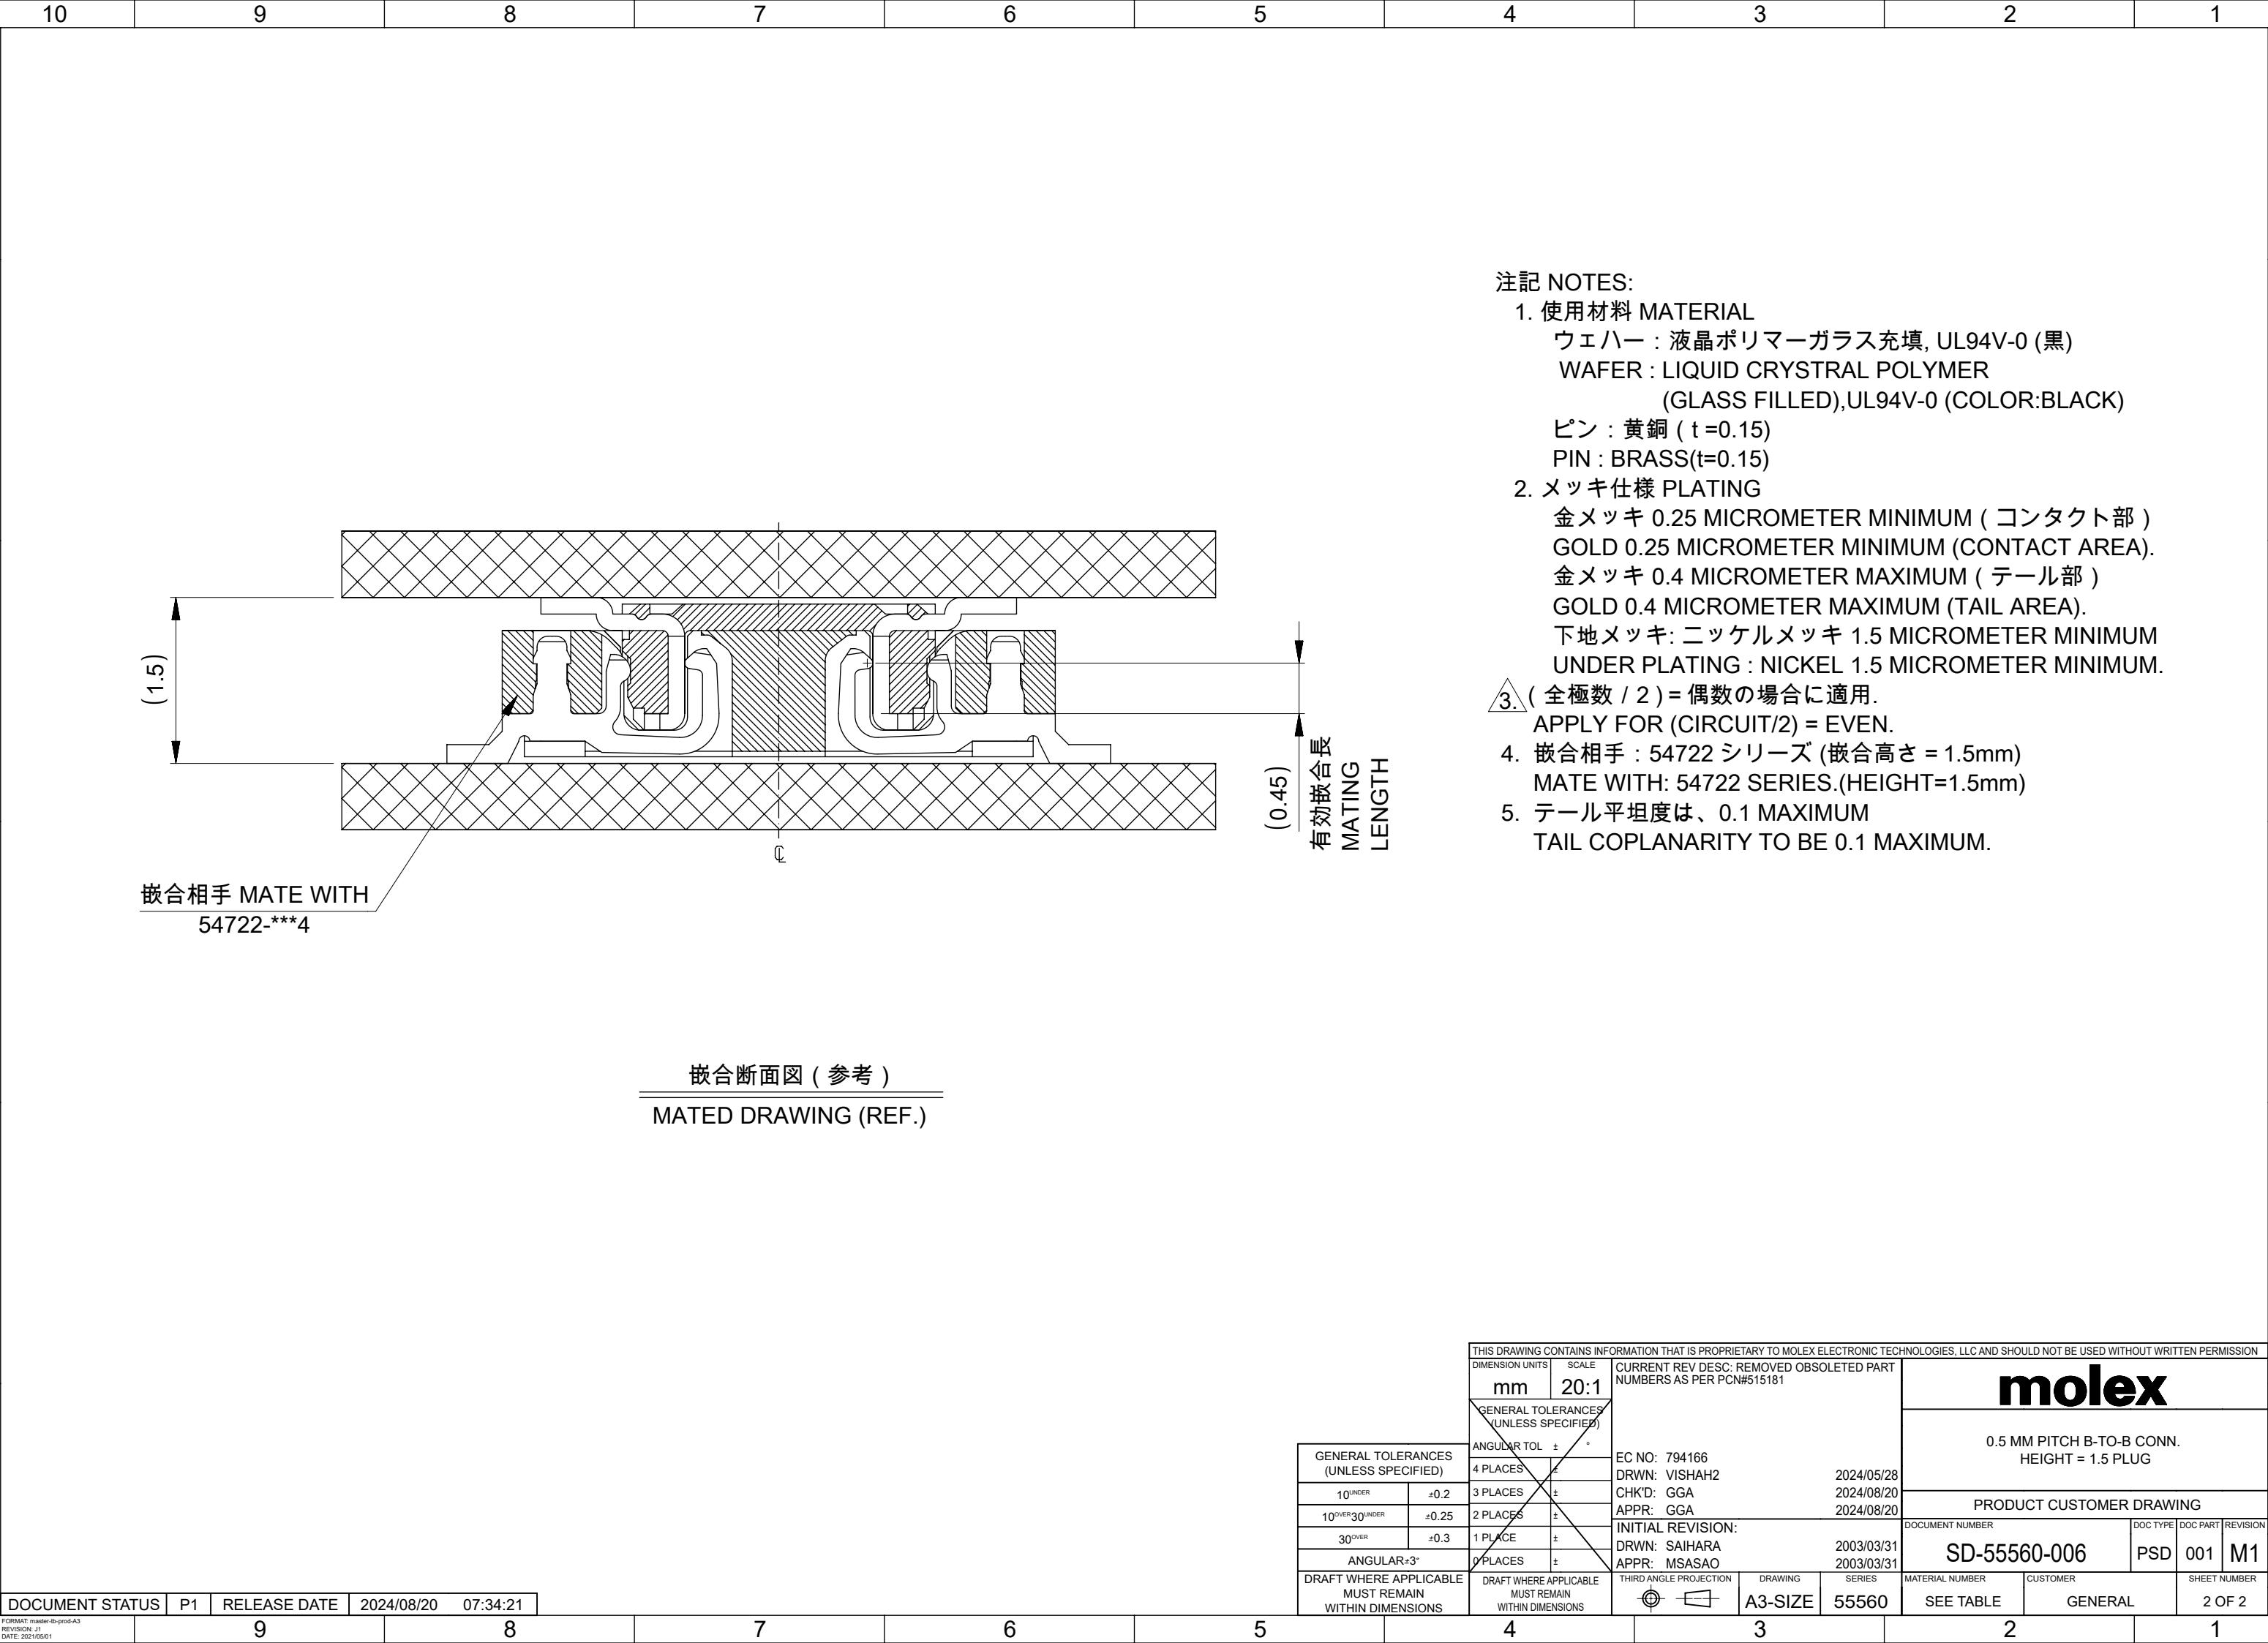

- 注記 NOTES:
1. 使用材料 MATERIAL
ウェハー : 液晶ポリマーガラス充填, UL94V-0 (黒)
WAFER : LIQUID CRYSTRAL POLYMER (GLASS FILLED),UL94V-0 (COLOR:BLACK)
ピン : 黄銅 (t=0.15)
PIN : BRASS(t=0.15)
 2. メッキ仕様 PLATING
金メッキ 0.25 MICROMETER MINIMUM (コンタクト部)
GOLD 0.25 MICROMETER MINIMUM (CONTACT AREA).
金メッキ 0.4 MICROMETER MAXIMUM (テール部)
GOLD 0.4 MICROMETER MAXIMUM (TAIL AREA).
下地メッキ: ニッケルメッキ 1.5 MICROMETER MINIMUM
UNDER PLATING : NICKEL 1.5 MICROMETER MINIMUM.
 3. (全極数 / 2) = 偶数の場合に適用.
APPLY FOR (CIRCUIT/2) = EVEN.
 4. 嵌合相手 : 54722 シリーズ (嵌合高さ = 1.5mm)
MATE WITH: 54722 SERIES.(HEIGHT=1.5mm)
 5. テール平坦度は、0.1 MAXIMUM
TAIL COPLANARITY TO BE 0.1 MAXIMUM.

嵌合断面図 (参考)
MATED DRAWING (REF.)


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																			
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#515181				molex											
mm		20:1																	
GENERAL TOLERANCES (UNLESS SPECIFIED)				ANGULAR TOL ± °		EC NO: 794166 DRWN: VISHAH2 2024/05/28 CHK'D: GGA 2024/08/20 APPR: GGA 2024/08/20													
GENERAL TOLERANCES (UNLESS SPECIFIED)		4 PLACES		±		INITIAL REVISION: DRWN: SAIHARA 2003/03/31 APPR: MSASAO 2003/03/31													
10 ^{UNDER}		±0.2																	
10 ^{OVER} 30 ^{UNDER}		±0.25																	
30 ^{OVER}		±0.3																	
ANGULAR±3°		0 PLACES		±															
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		DOCUMENT NUMBER		DOC TYPE		DOC PART		REVISION	
								A3-SIZE		55560		SEE TABLE		GENERAL		001		M1	

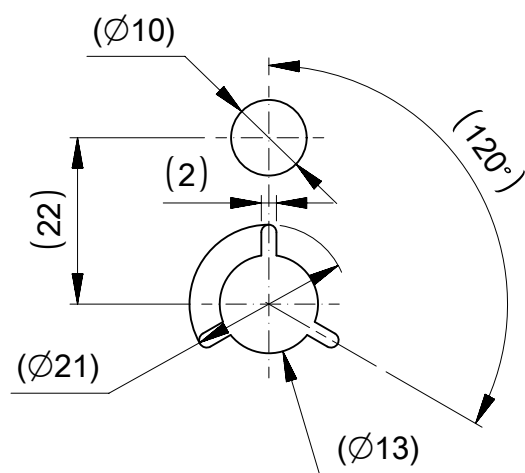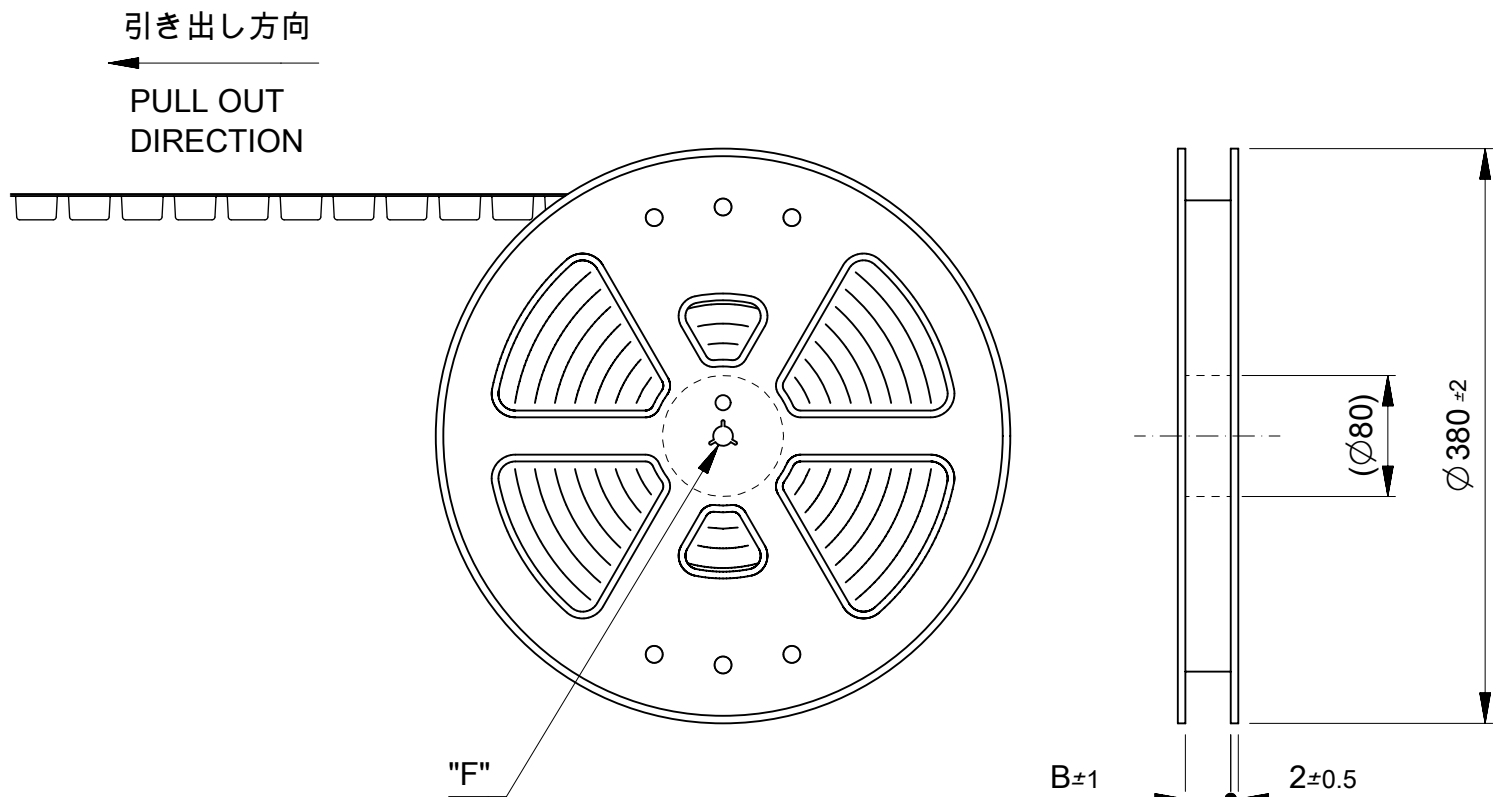


DETAIL "F"

NOTE


- 製品詳細寸法については図面 SD-55560-006 を参照下さい。
DETAIL DIMENSIONS, SEE SD-55560-006
- 梱包数量 : 3000個 / リール
NUMBER OF CONNECTORS : 3000PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH


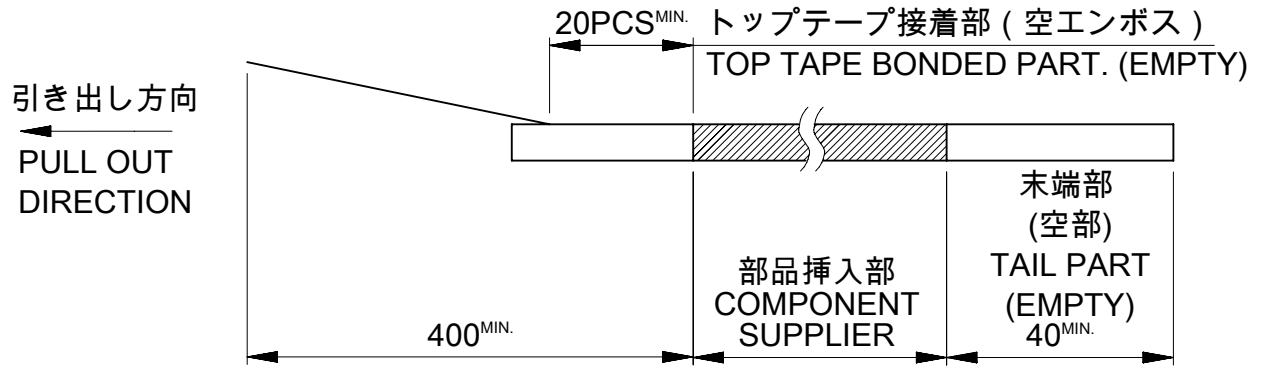


- トップテープの剥離強度 : 0.1N~0.7N(10.2gf~71.4gf)
(剥離方向は下図参照)
尚、本規格値は出荷時に適用。(但し、輸送時に剥離が発生しないこと.)
PEELING OFF FORCE OF TOP TAPE : 0.1N~0.7N(10.2gf~71.4gf)
(PEELING DIRECTION AS SHOWN IN FOLLOWING FIG.)
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT.
PEEL OFF SHOULD NOT BE ALLOWED, DURING TRANSPORTATION.

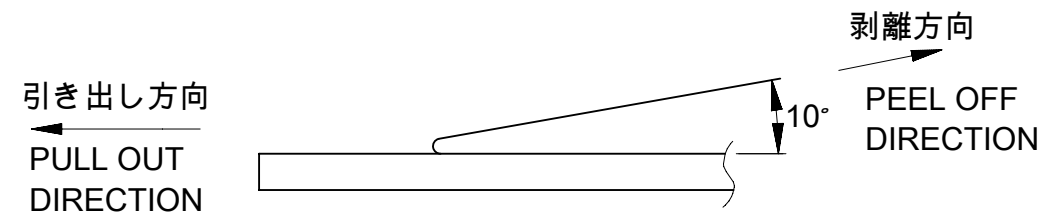

- 材料 キャリアテープ : ポリプロピレン (PP)
トップテープ : PET,PE,PEF
リール : ポリスチレン (PS) <リサイクル材を含む>
MATERIAL CARRIER TAPE : POLYPROPYLENE
TOP TAPE : PET,PE,PEF
REEL : POLYSTYRENE(PS)
< RECYCLE MATERIAL CONTAINED >

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
DIMENSION UNITS			SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#515181			molex 0.5 MM PITCH B-TO-B CONN. HEIGHT = 1.5 PLUG EMBOSS TAPE PACKAGE						
mm			NTS											
GENERAL TOLERANCES (UNLESS SPECIFIED)														
ANGULAR TOL ± °														
GENERAL TOLERANCES (UNLESS SPECIFIED)			4 PLACES ±		EC NO: 794166 DRWN: VISHAH2 2024/05/28 CHK'D: GGA 2024/08/20 APPR: GGA 2024/08/20			PRODUCT CUSTOMER DRAWING						
			3 PLACES ±											
			2 PLACES ±											
			1 PLACE ±											
10 ^{UNDER} ±0.2			0 PLACES ±		INITIAL REVISION: DRWN: S.AIHARA 2000/11/28 APPR: M.FUKUSHIMA 2001/01/30			DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION		
10 ^{OVER} 30 ^{UNDER} ±0.25			0 PLACES ±					SD-55560-007		PSD	001	L1		
30 ^{OVER} ±0.3			0 PLACES ±											
ANGULAR±3°			0 PLACES ±											
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING	SERIES	MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
							A3-SIZE	55560	SEE SHEET 2-5		GENERAL		1 OF 5	

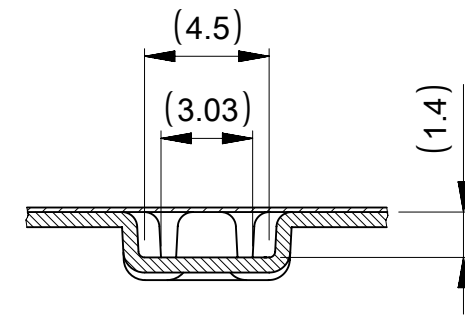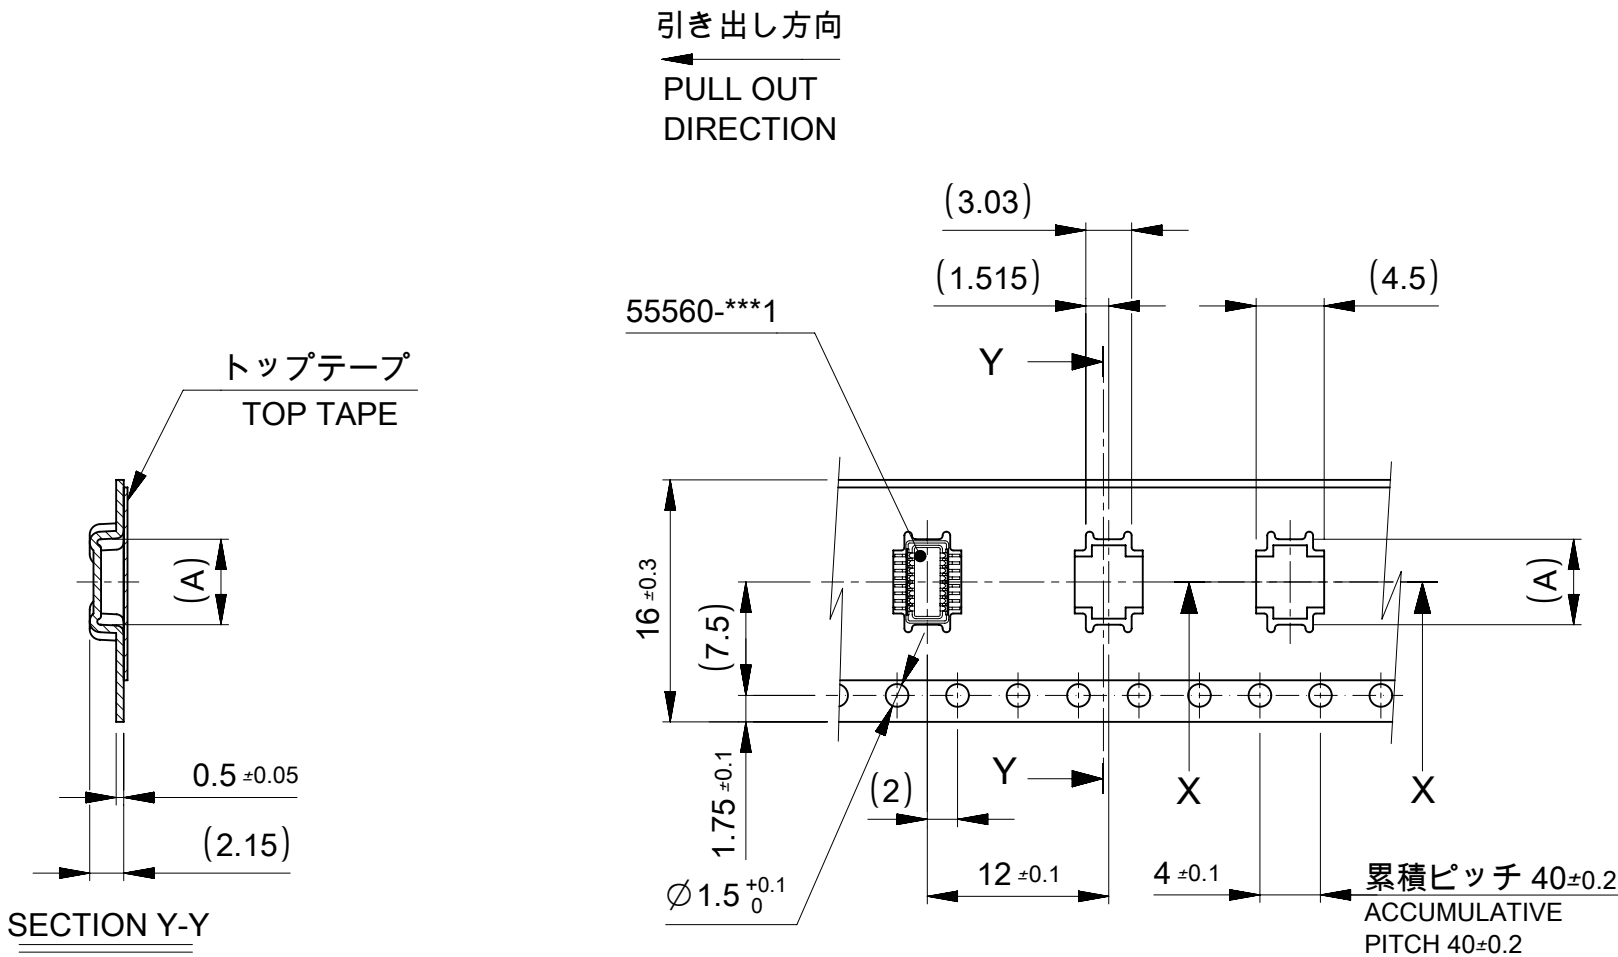


16 mm幅キャリアテープ
16mm WIDTH CARRIER TAPE

16	17.5	6.65	55560-0207	20
キャリアテープ幅 CARRIER TAPE WIDTH		B	(A)	極数 CIRCUIT

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS				SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#515181			molex		
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)				ANGULAR TOL ± °			EC NO: 794166 DRWN: VISHAH2				

DOCUMENT STATUS	P1	RELEASE DATE	2024/08/20	07:34:21
-----------------	----	--------------	------------	----------

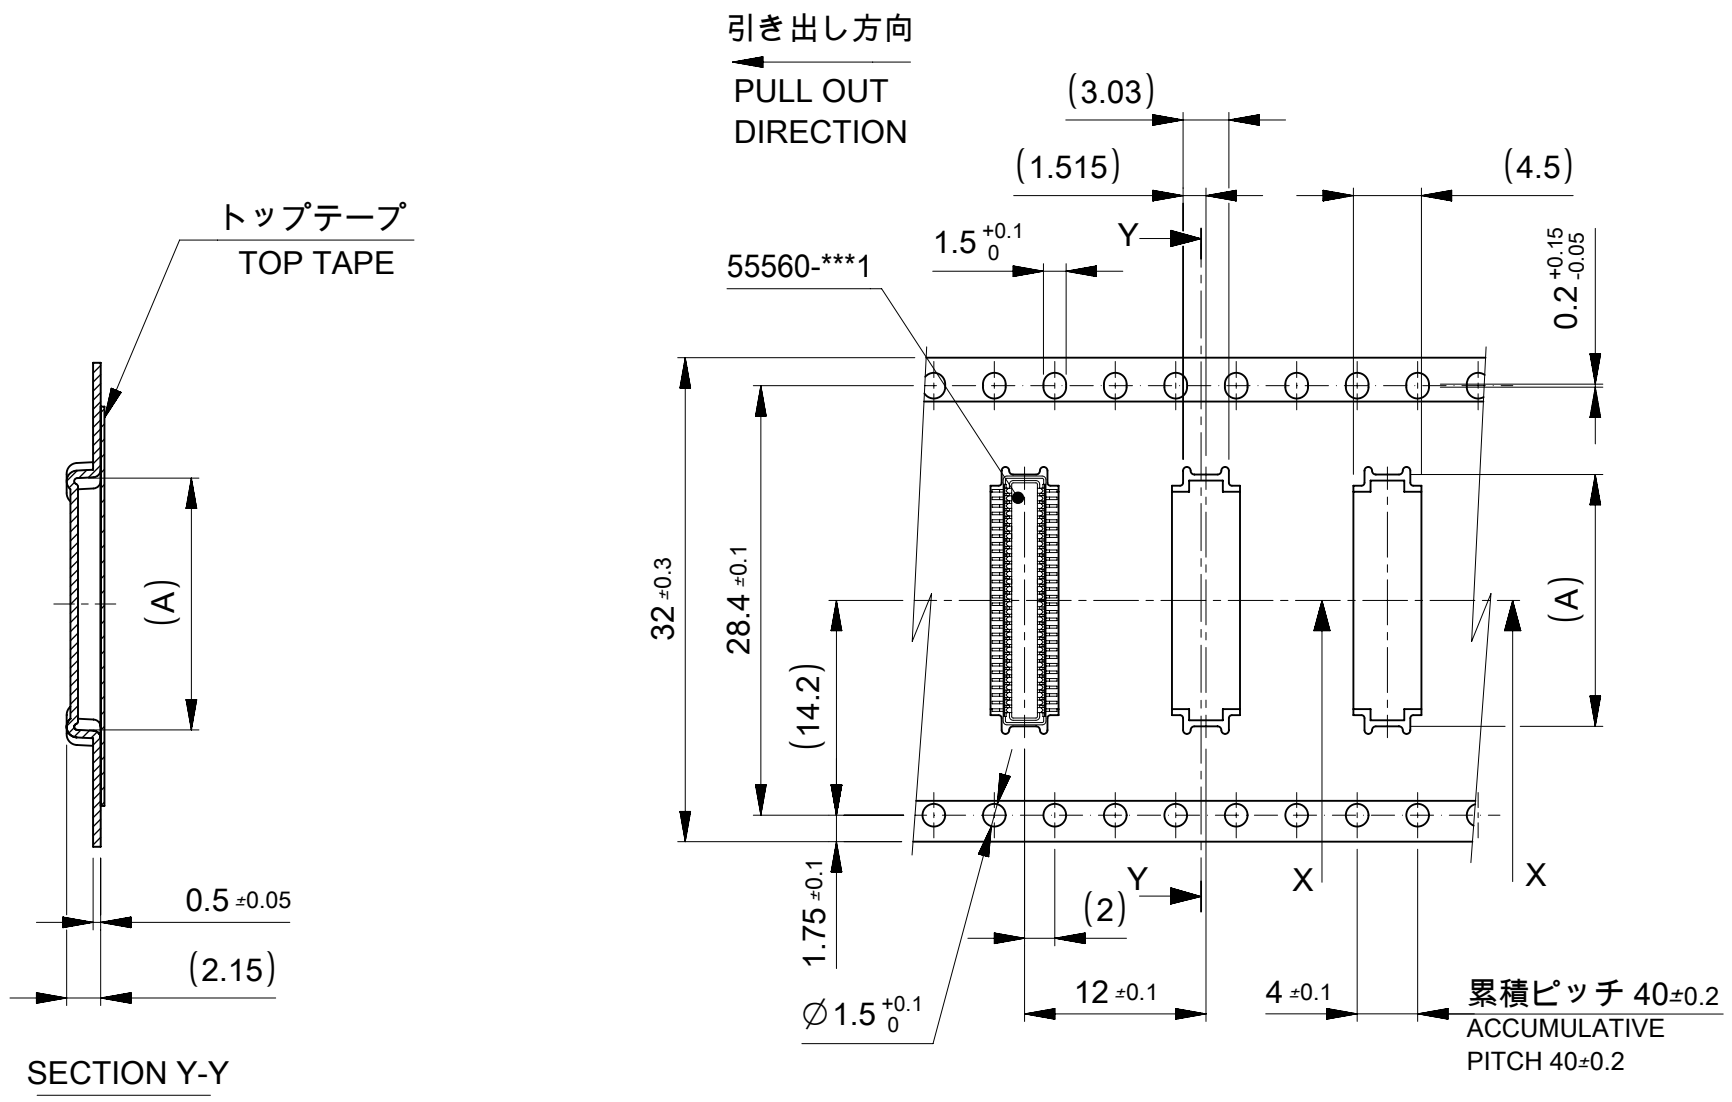

32 mm幅キャリアテープ
32mm WIDTH CARRIER TAPE

32		33.5	16.65	55560-0607	60
キャリアテープ幅 CARRIER TAPE WIDTH		B	(A)	MATERIAL NO.	極数 CIRCUIT
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
UNITS SCALE NTS	CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#515181		molex 0.5 MM PITCH B-TO-B CONN. HEIGHT = 1.5 PLUG EMBOSS TAPE PACKAGE		
TOLERANCES (S SPECIFIED) COL ± °	EC NO: 794166 DRWN: VISHAH2 CHK'D: GGA APPR: GGA				
± ± ± ± ±	2024/05/28 2024/08/20 2024/08/20		PRODUCT CUSTOMER DRAWING		
± ±	INITIAL REVISION: DRWN: S.AIHARA APPR: M.FUKUSHIMA		DOCUMENT NUMBER SD-55560-007		DOC TYPE PSD
±	2000/11/28 2001/01/30		DOC PART 001		REVISION L1
WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION 	DRAWING A3-SIZE	SERIES 55560	MATERIAL NUMBER SEE SHEET 2-5	CUSTOMER GENERAL
					SHEET NUMBER 4 OF 5

DOCUMENT STATUS	P1	RELEASE DATE	2024/08/20 07:34:21
-----------------	----	--------------	---------------------

