
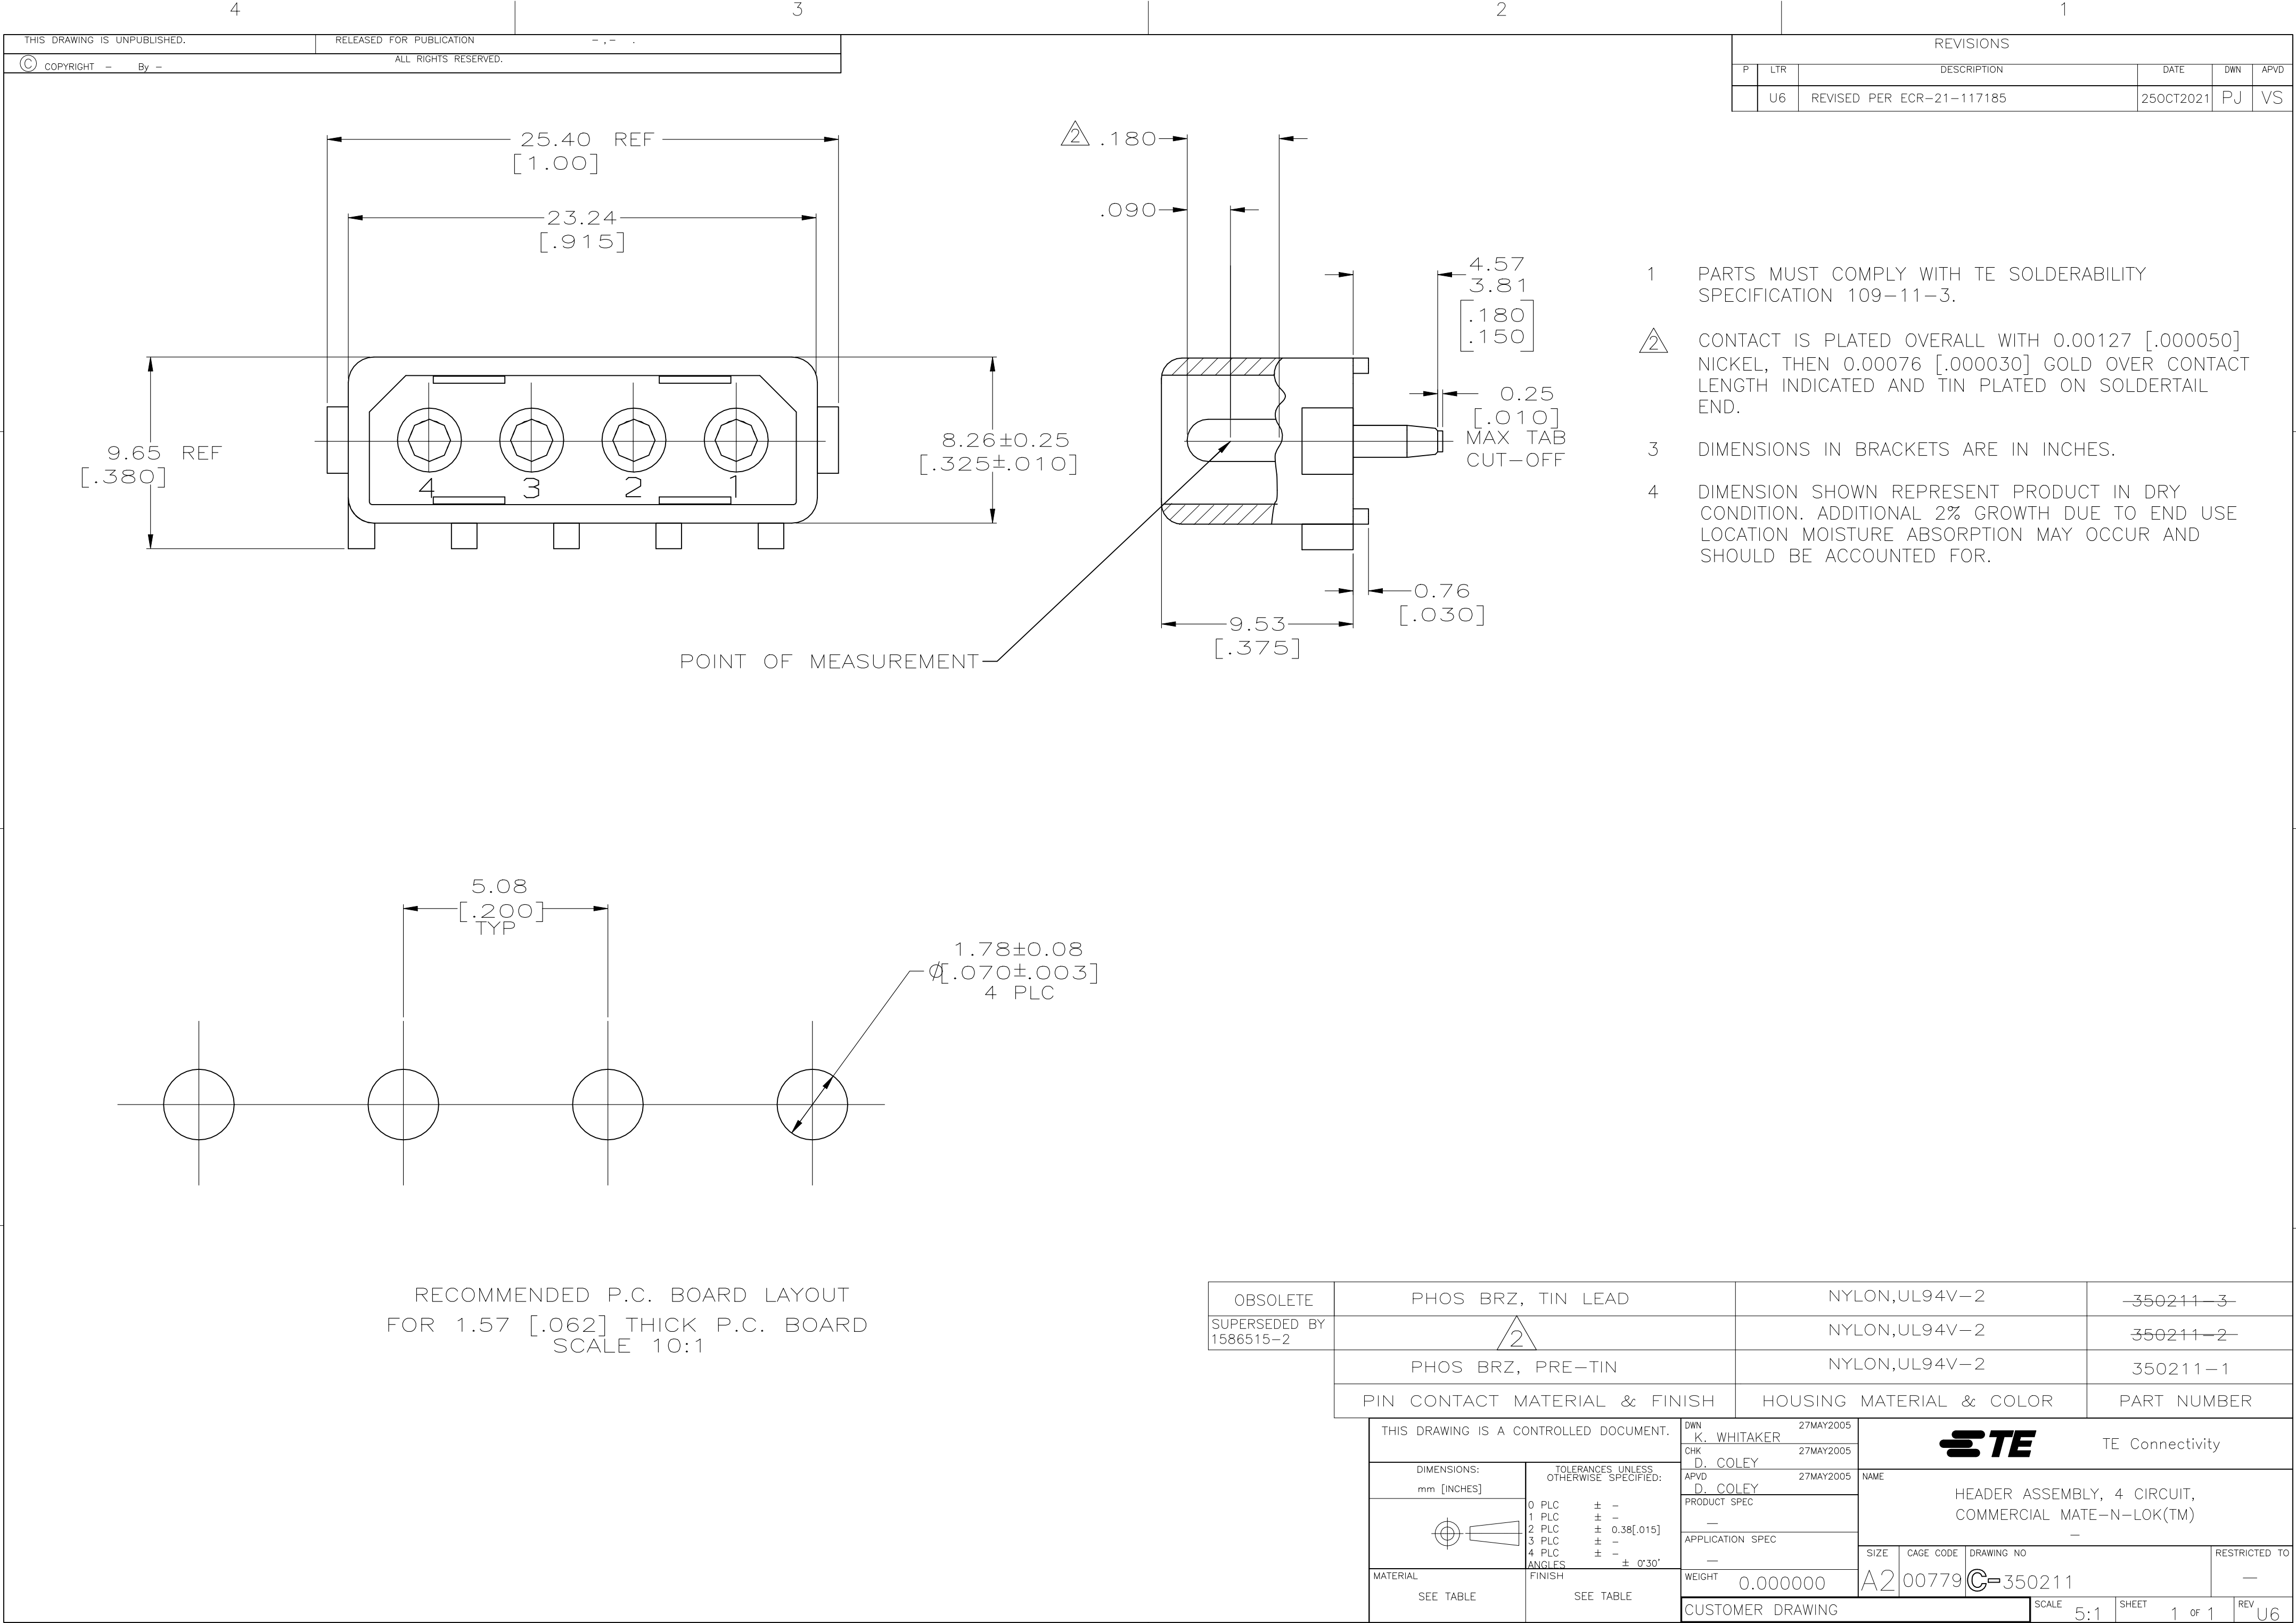




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	U6	REVISED PER ECR-21-117185	25OCT2021	PJ	VS

- 1
- PARTS MUST COMPLY WITH TE SOLDERABILITY SPECIFICATION 109-11-3.
- 2
- CONTACT IS PLATED OVERALL WITH 0.00127 [.000050] NICKEL, THEN 0.00076 [.000030] GOLD OVER CONTACT LENGTH INDICATED AND TIN PLATED ON SOLDERTAIL END.
- 3
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4
- DIMENSION SHOWN REPRESENT PRODUCT IN DRY CONDITION. ADDITIONAL 2% GROWTH DUE TO END USE LOCATION MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.

RECOMMENDED P.C. BOARD LAYOUT
FOR 1.57 [.062] THICK P.C. BOARD
SCALE 10:1

OBSOLETE	PHOS BRZ, TIN LEAD	NYLON,UL94V-2	-350211-3-			
SUPERSEDED BY 1586515-2		NYLON,UL94V-2	350211-2-			
	PHOS BRZ, PRE-TIN	NYLON,UL94V-2	350211-1			
	PIN CONTACT MATERIAL & FINISH	HOUSING MATERIAL & COLOR	PART NUMBER			
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 27MAY2005	 TE Connectivity			
		CHK D. COLEY 27MAY2005				
DIMENSIONS: mm [INCHES]		APVD D. COLEY 27MAY2005	NAME			
		PRODUCT SPEC	HEADER ASSEMBLY, 4 CIRCUIT, COMMERCIAL MATE-N-LOK(TM)			
		—	—			
		APPLICATION SPEC	—			
		—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL		WEIGHT	A2 00779		C-350211	—
SEE TABLE		CUSTOMER DRAWING		SCALE	SHEET	REV
				5:1	1 of 1	U6