
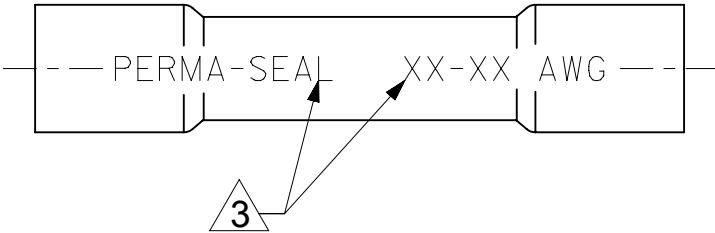
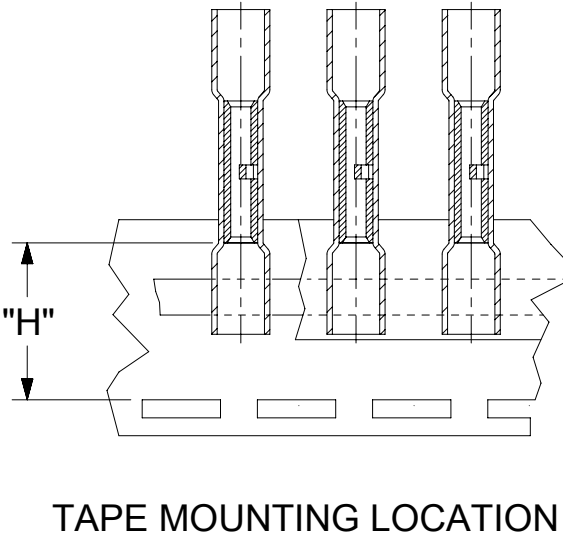


10	9		8	7	6		5	4	3	2		1
MAT'L NO.	ENG NO.	MAT'L NO. TAPE MOUNT	ENG NO. TAPE MOUNT	PERMA-SEAL COLOR	WIRE AWG	Ø"A" MIN	Ø"B" MAX	"C" REF	"H" ± .020 (0.51)	Ø"D" MIN		
191640013	SAA-22-18	191640014	SAA-22-18T	SAA-22-18T	22 - 18	.185 (4.70)	.280 (7.11)	1.50 (38.1)	.767 (19.48)	.059 (1.50)		
191640044	SBB-16-14	191640045	SBB-16-14T	SBB-16-14T	16 - 14	.195 (4.95)	.308 (7.82)	1.50 (38.1)	.765 (19.43)	.091 (2.31)		
191640056	SC-12-10	191640057	SC-12-10T	SC-12-10T	12 - 10	.275 (6.99)	.383 (9.73)	1.75 (44.5)	.800 (23.32)	.139 (3.53)		
191640079	SD-354	- - - -	- - - -	- - - -	8	.300 (7.62)	.448 (11.38)	2.00 (50.8)	- - - -	.165 (4.19)		

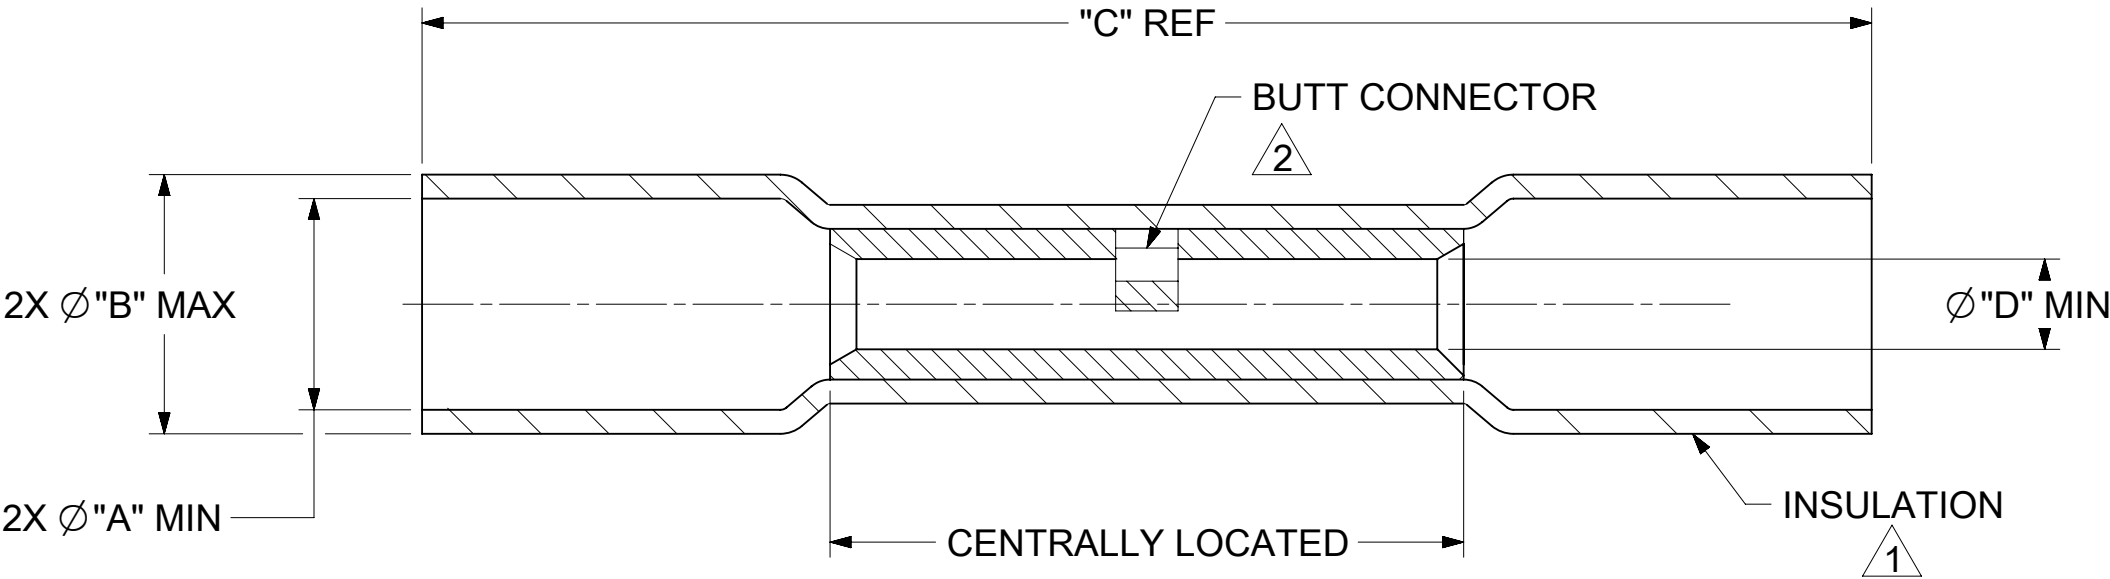

NOTE(S):

- 1 INSULATION MATERIAL: HEAT SHRINKABLE TUBING WITH HOTMELT INNER LINER. (SEE CHART FOR COLOR).
- 2 SEAMLESS TIN PLATED COPPER TERMINAL.
- 3 PRINTED TEXT IN BLACK APPROX. .12(3.0) HIGH
- 4. PARTS ARE RoHS COMPLIANT.

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION													
	DIMENSION UNITS		SCALE		CURRENT REV DESC: "C" WAS MAX					molex PERMA-SEAL NIAC BUTT CONNECTORS				
	INCH/MM		NTS											
	GENERAL TOLERANCES (UNLESS SPECIFIED)													
			MM	INCH	EC NO: 790060 DRWN: DEANNM1 CHK'D: ETHRODAHL APPR: ETHRODAHL 2024/06/04 2024/06/21 2024/06/21					PRODUCT CUSTOMER DRAWING				
	4 PLACES		±	±										
	3 PLACES		±	±										
	2 PLACES		±	±										
	1 PLACE		±	±										
	DIVISIONAL SYMBOLS	0 PLACES		±	±	INITIAL REVISION: DRWN: BENDERLE APPR: RDEROSS 2002/04/02 2002/04/03					DOCUMENT NUMBER		DOC TYPE	DOC PART
ANGULAR TOL		±	°	SD-19164-017							PSD	001	G	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION							DRAWING	SERIES	MATERIAL NUMBER	
						B-SIZE	19164	SEE CHART		GENERAL MARKET		1 OF 1		