




Connectors > Contacts > Connector Contacts

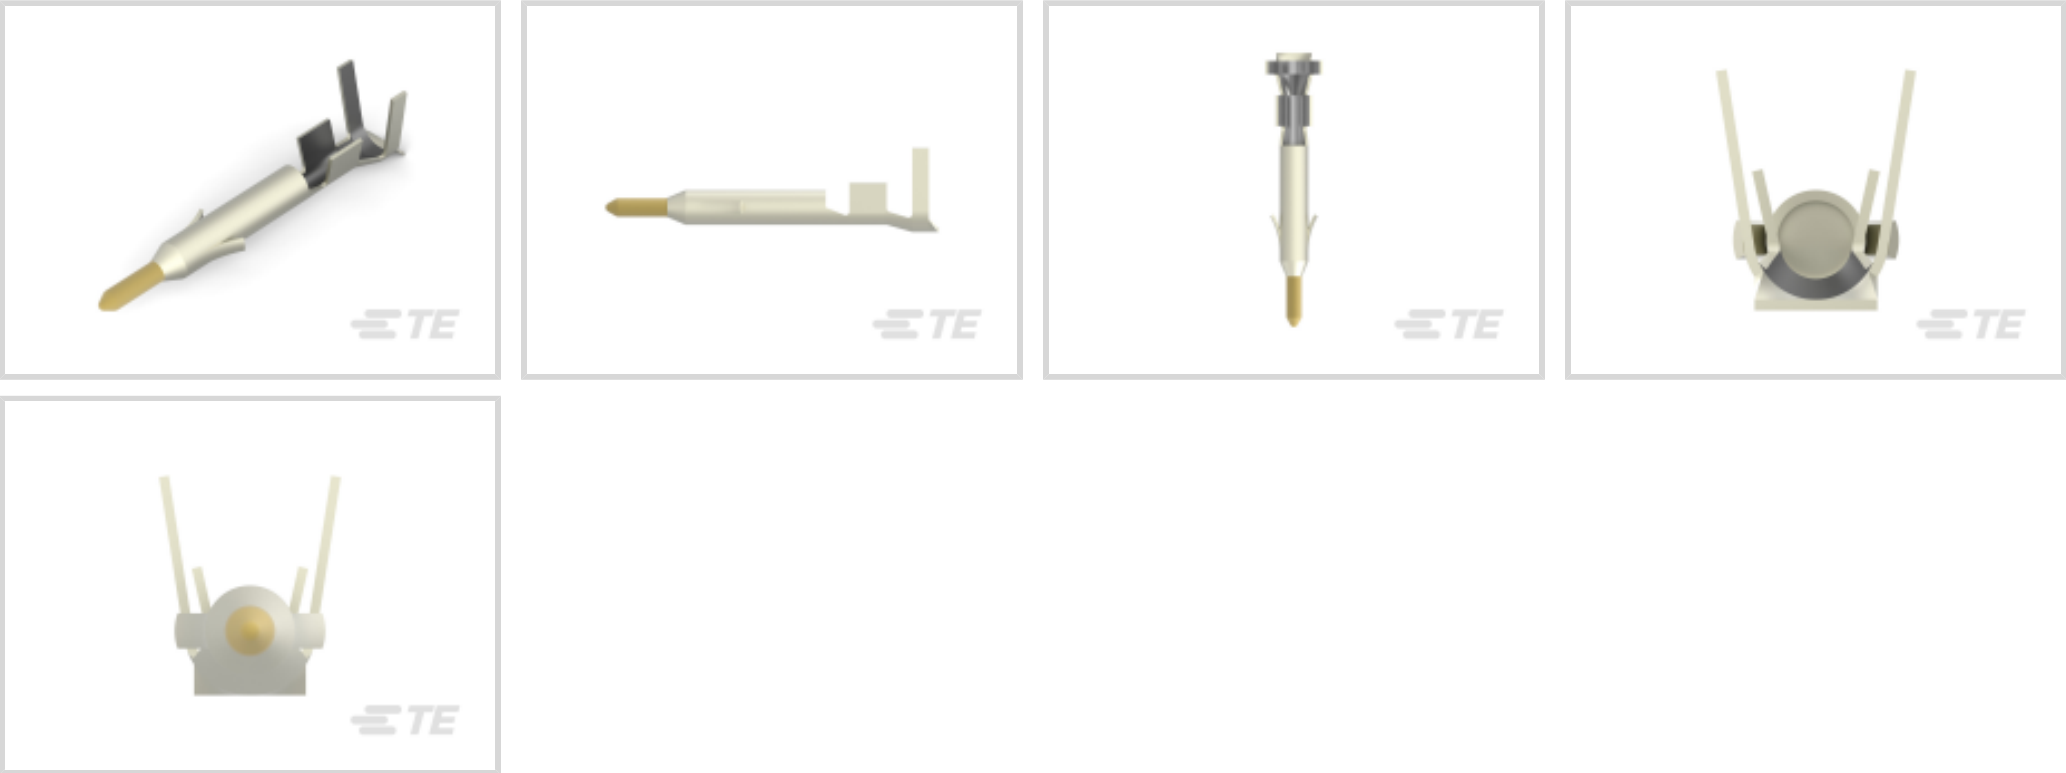

Contact Type: **Pin**
Contact Mating Area Plating Material: **Gold**
Wire Contact Termination Area Plating Material: **Tin-Lead**
Operating Voltage: **600 VDC**

Features

Industry Standards

Compatible With Agency/Standards Products	UL, CSA
---	---------

Product Type Features

Discrete Wire Type	Stranded
--------------------	----------

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Packaging Features

Packaging Quantity	4500
Packaging Method	Reel

Dimensions

Compatible Insulation Diameter Range	1.5 – 2.39 mm[.059 – .094 in]
Wire Size	.3 – .9 mm²

Contact Features

Contact Underplating Material	Nickel
Contact Orientation	Straight
Mating Pin Diameter	1 mm[.039 in]



Contact Underplating Material Thickness	1.27 µm[50 µin]
Contact Mating Area Plating Material Thickness	.76 µm[30 µin]
Wire Contact Termination Area Plating Material Finish	Bright
Wire Contact Termination Area Plating Thickness	2.54 µm[100 µin]
Contact Type	Pin
Contact Mating Area Plating Material	Gold
Wire Contact Termination Area Plating Material	Tin-Lead
Contact Retention Within Housing	With
Contact Base Material	Brass
Contact Current Rating (Max)	11.2 A

Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Other

EU RoHS Compliance	Not Compliant
EU ELV Compliance	Compliant with Exemptions

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (13% in Component Part)



Article Safe Usage Statements:
Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.


Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


 TE Part # 91522-1 CCII MINI UNML PIN SKT 22-18 ASSY	 TE Part # 90759-1 PROCRIMP TL W/DIE MIN UNIV MNL	 TE Part # 189727-1 EXTRACTION TOOL	 TE Part # 455830-1 INSERTION TOOL
 TE Part # 1445825-1 RECPT,11-9,FREE HNG,STD KEY	 TE Part # 1445828-1 REC,11-6,FRE HNG,SM INS,STD KE	 TE Part # 1445421-3 REC,8-4,FLNG MT,LG INS,STD KEY	 TE Part # 770586-1 22P MINI UMNL PLUG HSG
 TE Part # 1445816-1 RECPT,11-9,FLNG MT,STD KEY	 TE Part # 794942-1 10P MINI UMNL CAP HSG	 TE Part # 1445816-3 RECPT,11-9,FLNG MT,STD KEY	 TE Part # 770587-1 24P MINI UMNL PLUG HSG

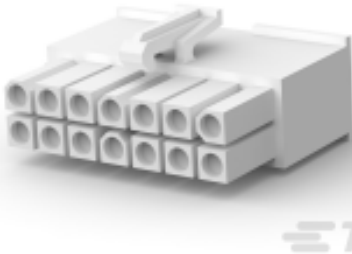


TE Part # 770582-1
14P MINI UMNL PLUG HSG

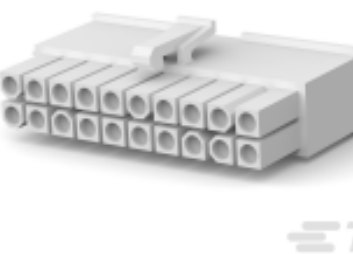


TE Part # 770585-1
20P MINI UMNL PLUG HSG




TE Part # 172333-1
MINI UNIVERSAL M-N-L HOUSING



TE Part # 794781-1
10P MINI UMNL PLUG HSG

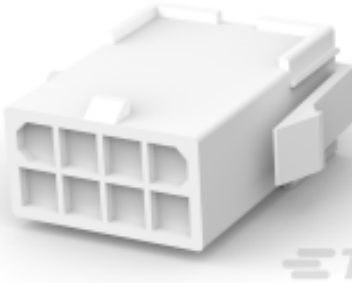

TE Part # 794941-1
08P MINI UMNL CAP HSG



TE Part # 794895-1
6 CIR MINI UMNL RND WIRE HOLES



TE Part # 794821-1
08P MINI UMNL PLUG HSG



TE Part # 794940-1
06P MINI UMNL CAP HSG

Also in the Series | Mini-Universal MATE-N-LOK



Connector Caps & Covers(2)



Connector Contacts(89)



Connector Hardware(4)




Connector Seals & Cavity Plugs(17)



Connector Strain Relief(2)



Insertion & Extraction Tools(1)

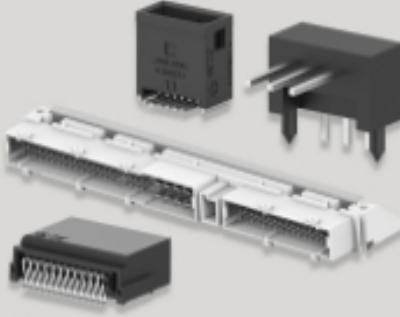

PCB Headers & Receptacles(93)



Rectangular Power Connectors(104)

Customers Also Bought



TE Part #1658543-2
SOCKET CONT DUPL PLT STRIP HD-



TE Part #794423-1
06P MINI UMNL STR RELIEF P&CAP



TE Part #794941-1
08P MINI UMNL CAP HSG



TE Part #1-770904-0
MINI UMNL SOK 22-18 AWG AU





TE Part #5-794632-2
22P MICRO MNL ASSY,VRT,HDR,LF




TE Part #1776088-1
CMC RECEPT ASSY,SIZE 28-16



TE Part #5747150-4
09 RCPT SP/FMS STD



TE Part #165399-1
SHUR PLUG REC.ASSY.

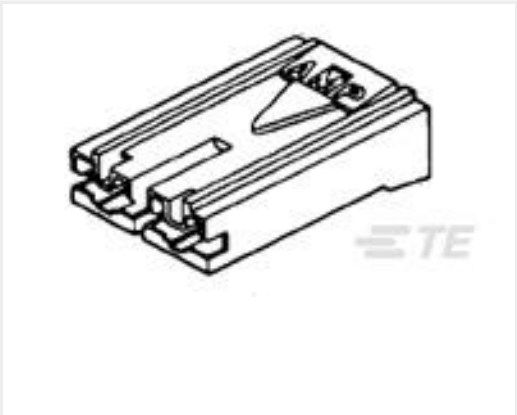

TE Part #179720-1
187 HSG. PL MKII REC. 10mm 2P NAT



TE Part #5-146252-1
02 MODII HDR DRST B/A .100 LF

Documents

Product Drawings

MINI UMNL PIN 22-18 AWG AU

English

CAD Files

Customer View Model

ENG_CVM_CVM_770903-3_U.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_770903-3_U.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_770903-3_U.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

770903-3

Pin Contact, Gold, 600 VAC, 600 VDC, 22 – 18 AWG Wire Size, .3 – .9 mm² Wire Size, Crimp, Brass, Power, Mini-Universal MATE-N-LOK



English