

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2000

© COPYRIGHT 2000

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

GW

-

P

LTR

DESCRIPTION

DATE

DWN

APVD


A1

SR10-0138-01



5APR2001

CM


KM

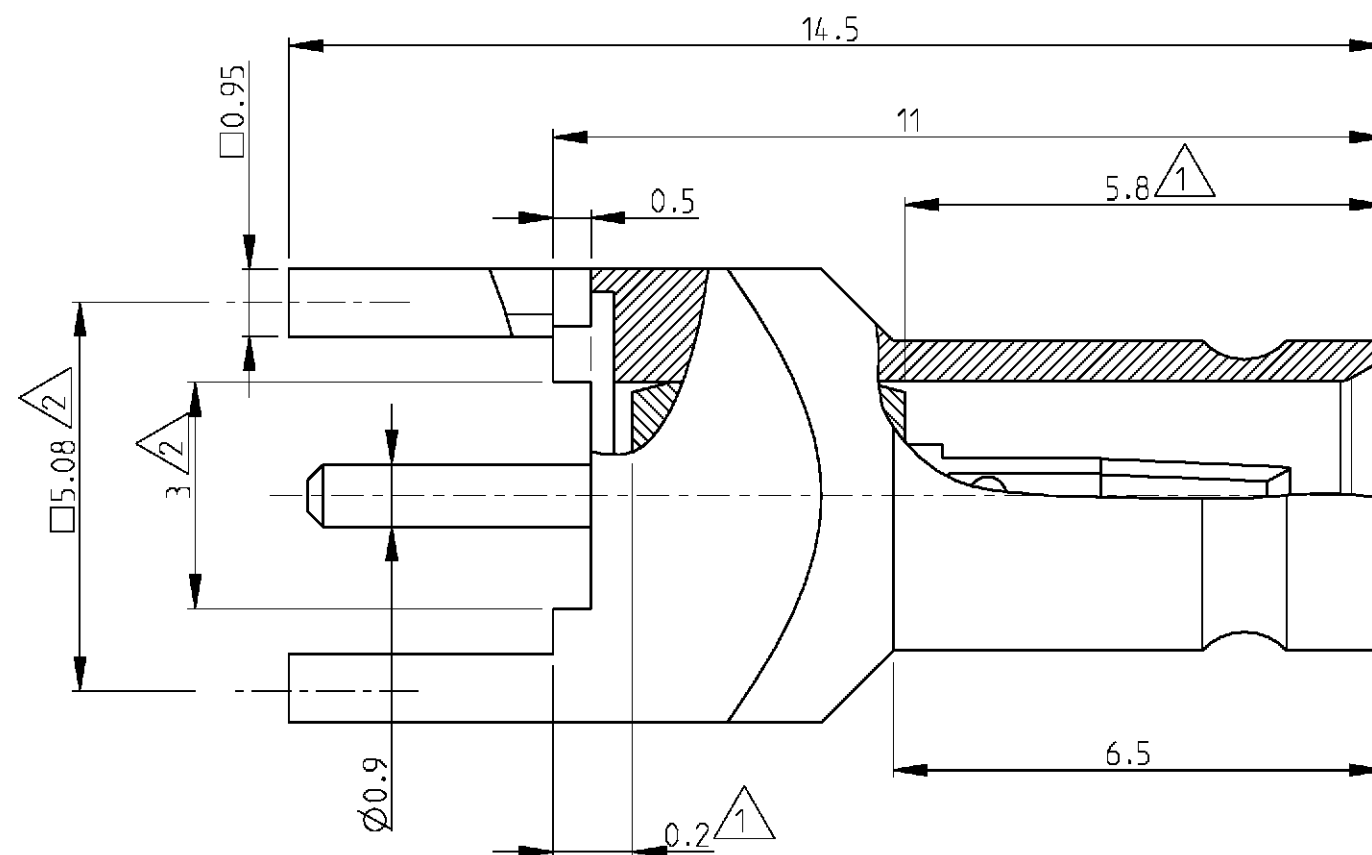

Recommended
PCB Layout
Pitch : 2.54

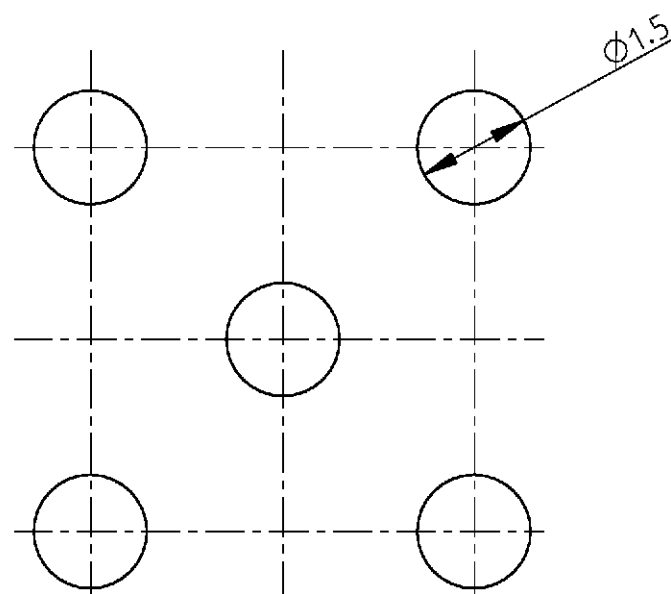

1:1




2:1

4. Mating face according to DIN 47297 and CECC 22230

3. Mounting requirements : PCB with pitch 2.54
Thickness : ± 3 mm
Diameter of bores : $\varnothing 1.5$ mm $\triangle 2$ Nominal dimension $\triangle 1$ Minimum dimension

All dimensions are maximum unless otherwise specified

V23600-A1027-C1	3-1393670-4	Dielectric	PTFE	
		Outer Con.	Brass	1 μ m Au min in contact area
		Center Con.	Cu Be	1 μ m Au min in contact area
Old Nr	Tyco Nr	Description	Material	Plating

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.DIMENSIONS:
mm

MATERIAL

-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC $\pm$
1 PLC ± 0.5
2 PLC ± 0.13
3 PLC ± 0.013
4 PLC ± 0.0001
ANGLES $\pm$

FINISH

-

DWN 15MAR2001

MOROB

CHK 3APR2001

MATTHEEUS

APVD 5APR2001

BOZZER

PRODUCT SPEC

108-71032

APPLICATION SPEC

-

WEIGHT

-

tyco
ElectronicsTyco Electronics
Oostkamp - Belgium

NAME

BULKHEAD JACK
WITH PCB CONNECTION
1.0/2.3 50 Ohm

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C-3-1393670-4

SCALE 10/1

SHEET 1 OF 1

REV A1