




Connectors > PCB Connectors > PCB Headers & Receptacles

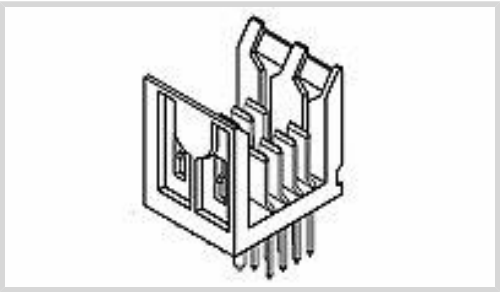

EU RoHS Compliance: **Compliant**
EU ELV Compliance: **Compliant**
PCB Connector Assembly Type: **PCB Mount Header**
PCB Mount Orientation: **Vertical**
Connector System: **Board-to-Board**

Features

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Type Features

Mixed & Hybrid Header	No
Connector Shape	Rectangular
PCB Connector Assembly Type	PCB Mount Header
Connector System	Board-to-Board
Header Type	Partially Shrouded
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Loaded Positions	8
Number of Power Positions	8
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Vertical
Number of Positions	8
Number of Rows	4

Electrical Characteristics

--	--



Operating Voltage	30 VDC
Insulation Resistance	5000 MΩ
Contact Resistance	10 mΩ

Body Features

Primary Product Color	Natural
-----------------------	---------

Contact Features

Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 – 2.54 μm[50 – 100 μin]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
PCB Contact Termination Area Plating Material Thickness	3.81 – 6.35 μm[150 – 250 μin]
Contact Layout	Matrix
Contact Mating Area Length	8 mm[.315 in]
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold
Contact Type	Pin
Contact Current Rating (Max)	3 A

Termination Features

Termination Post & Tail Length	4.25 mm[.167 in]
Termination Method to PCB	Through Hole - Solder

Mechanical Attachment

Panel Mount Feature	Without
Mating Retention Type	Detent Lock
Mating Retention	With
Mating Alignment Type	Polarizing Rib
PCB Mount Alignment Type	Locating Posts
PCB Mount Retention	Without
PCB Mount Alignment	With
Connector Mounting Type	Board Mount
Mating Alignment	With

Housing Features

--	--



Mating Entry Location	Top
Housing Material	LCP (Liquid Crystal Polymer)
Centerline (Pitch)	2 mm[.079 in]

Dimensions

Row-to-Row Spacing	2 mm[.079 in]
Connector Width	15.8 mm[.622 in]
PCB Thickness (Recommended)	1.6 mm[.063 in]
Connector Height	17 mm[.668 in]
Connector Length	11.88 mm[.486 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

Glow Wire Rating	Standard Part - Not Glow Wire
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	48
Packaging Method	Tube

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free



Solder Process Capability

Pin-in-Paste capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 5536607-1
[2MM FB,ASY,008,PWR,REC,SL,2.73](#)

Also in the Series | Z-PACK Future Bus+

Backplane Connector Housings(19)

Hard Metric Backplane Connectors(1)

PCB Headers & Receptacles(14)

Customers Also Bought

TE Part #1658543-2
[SOCKET CONT DUPL PLT STRIP HD-](#)

TE Part #770476-2
[SL156 RECPT, AUNI/PHBZ](#)

TE Part #5745076-6
[HD-20 RCPT 9P VERT FFSCRLK](#)


TE Part #58614-1
[PROCRIMP, HT&D SL156](#)




TE Part #350180-2
TEST PROBE REC130L SPCL RED
GPBR



TE Part #91597-1
CCII SL-156 REC 24-18 ASSY

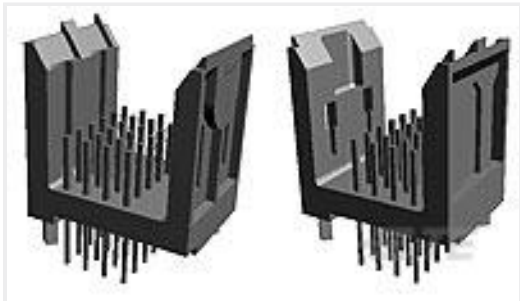

TE Part #5536501-2
2MM FB,ASY,48,SIG,HDR,SL,4.25

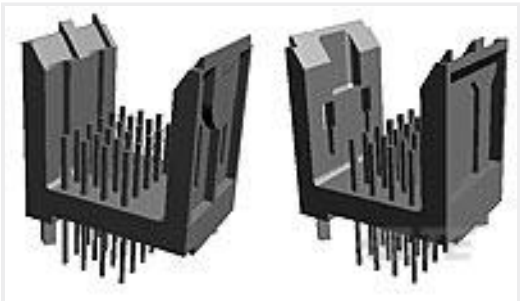

TE Part #5536501-1
2MM FB,ASY,24,SIG,HDR,SL,4.25

Documents

Product Drawings

2MMFB,ASY,008,PWR,HDR,SL,4.25

English

CAD Files

Customer View Model

ENG_CVM_5536623-1_O.3d_igs.zip

English

Customer View Model

ENG_CVM_5536623-1_O.3d_stp.zip

English

Customer View Model

ENG_CVM_5536623-1_O.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

POWER_CONNECTORS_CATALOG_SEC01_BOARD_TO_BOARD

English

Product Specifications

Application Specification

English