




Connectors > Contacts > Connector Contacts

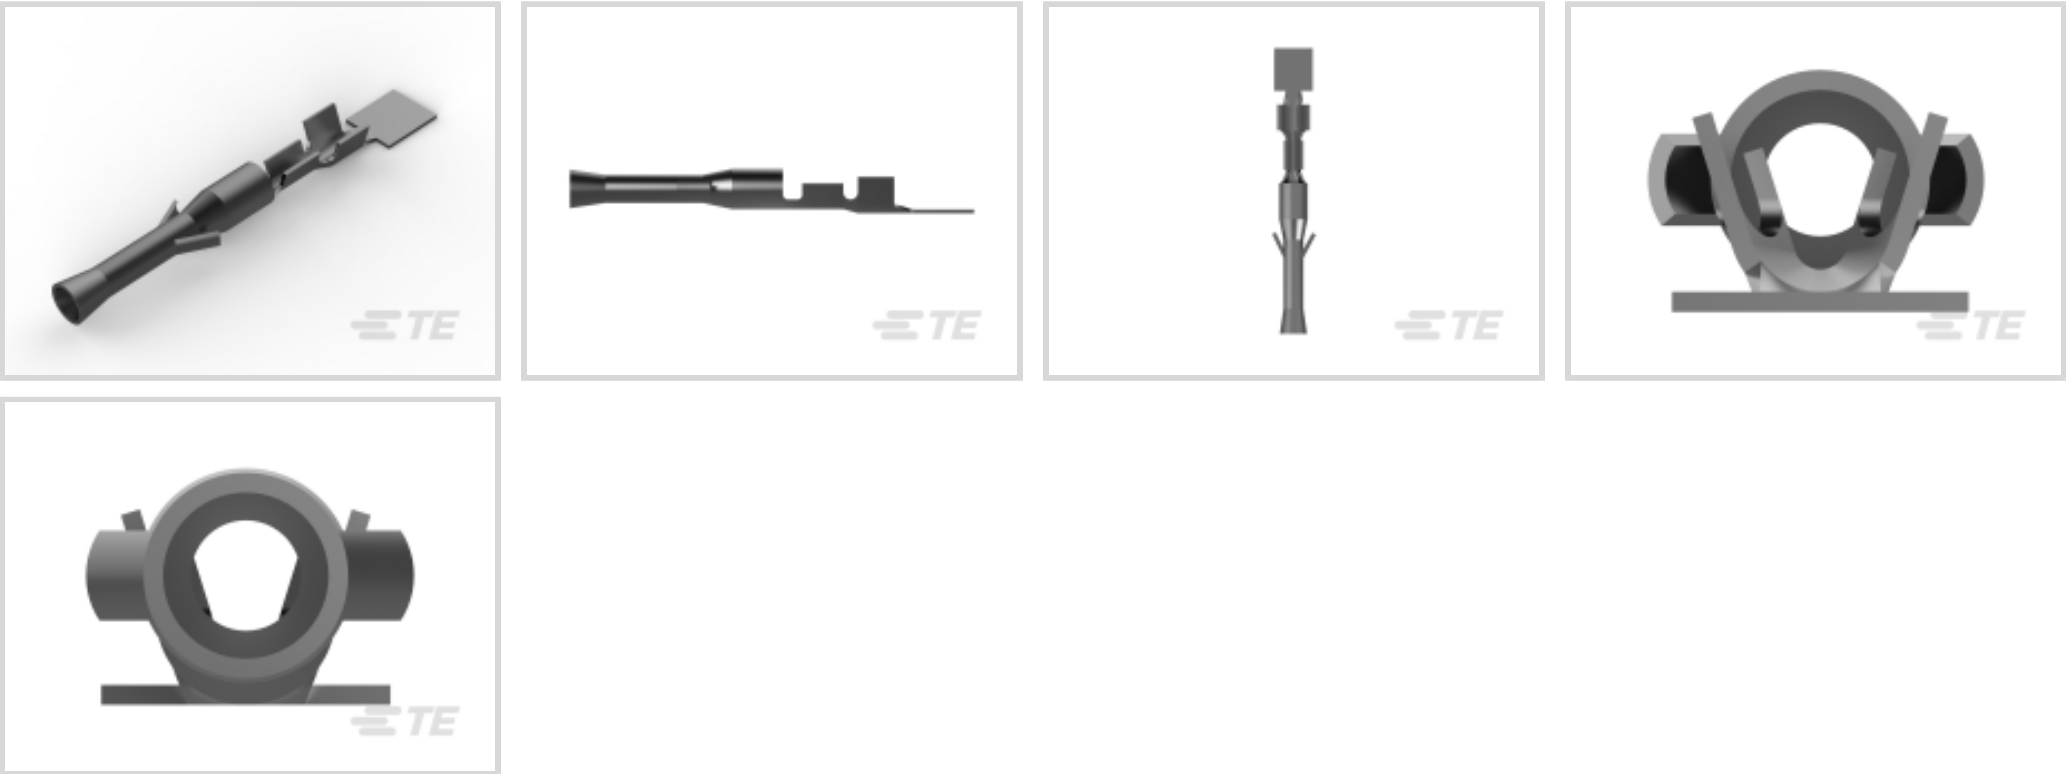

Contact Type: **Socket**
Contact Mating Area Plating Material: **Tin**
Wire Contact Termination Area Plating Material: **Pre-Tin**
Operating Voltage: **250 VAC**
Contact Retention Within Housing: **With**

Features

Industry Standards

Compatible With Agency/Standards Products	UL, CSA
---	---------

Packaging Features

Packaging Quantity	10000
Packaging Method	Reel

Dimensions

Compatible Insulation Diameter Range	1.52 mm[.06 in]
Wire Size	.05 – .2 mm ²

Mechanical Attachment

Wire Insulation Support	Without
Contact Retention Type Within Housing	Locking Lance

Contact Features

Contact Orientation	Straight
Mating Pin Diameter	1.57 mm[.062 in]



Contact Fabrication	Stamped & Formed
Wire Contact Termination Area Plating Material Finish	Matte
Wire Contact Termination Area Plating Thickness	.8 – 2 µm[31.49 – 78.74 µin]
Contact Type	Socket
Contact Mating Area Plating Material	Tin
Wire Contact Termination Area Plating Material	Pre-Tin
Contact Retention Within Housing	With
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	9 A

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC



Free

Solder Process Capability


Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts


 TE Part # 770278-1 01P .062 COMM P&S PLUG	 TE Part # 770334-1 04P .062 COMM P&S PLUG	 TE Part # 770277-1 01P .062 COMM P&S RECPT	 TE Part # 770335-1 04P .062 COMM P&S RECPT
 TE Part # 770333-1 03P .062 COMM P&S RECPT	 TE Part # 770340-1 02P .062 COMM P&S PLUG	 TE Part # 770343-1 02P .062 COMM P&S RECPT	 TE Part # 770331-1 03P .062 COMM P&S PLUG
 TE Part # 770342-1 02P .062 COMM P&S RECPT	 TE Part # 770274-1 04P .062 COMM P&S RECPT	 TE Part # 770275-1 04P .062 COMM P&S PLUG	 TE Part # 770341-1 02P .062 COMM P&S PLUG

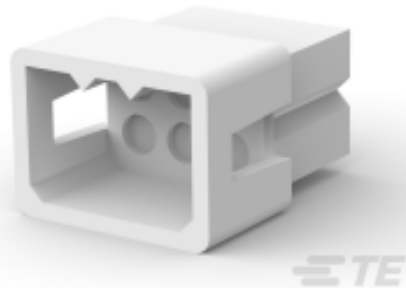

TE Part # 770355-1
06P .062 COMM P&S PLUG




TE Part # 770356-1
06P .062 COMM P&S RECPT

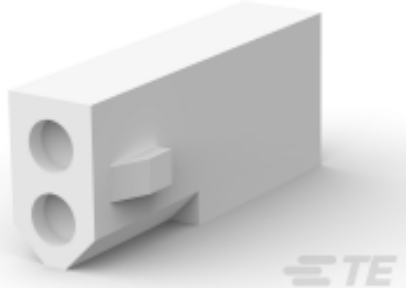


TE Part # 770419-1
02P .062 COMM P&S RECPT



TE Part # 770428-1
09P .062 COMM P&S PLUG

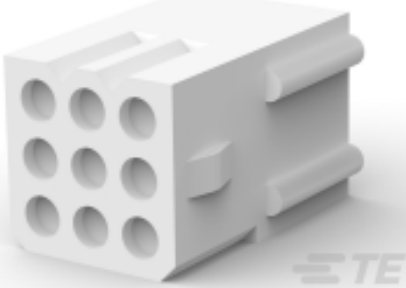

TE Part # 770429-1
09P .062 COMM P&S RECEPT

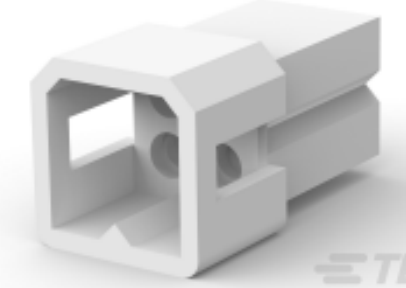

TE Part # 770433-1
04P .062 COMM P&S PLUG



TE Part # 770441-1
04P .062 COMM P&S RECPT



TE Part # 770442-1
04P .062 COMM P&S RECPT

Also in the Series | Commercial Pin and Socket Connectors



Connector Contacts(41)



Insertion & Extraction Tools(3)



Rectangular Connector Housings(10)



Rectangular Power Connectors(84)



Standard Circular Connectors(1)

Customers Also Bought



TE Part #DT04-2P
REC, 2P, GRY, N



TE Part #W2S
Wedgelocks: DEUTSCH DT



TE Part #0460-202-16141
DEUTSCH Solid Contacts



TE Part #282104-1
AMP SUPERSEAL 1.5MM,
CONNECTOR HOUSING



Documents

Product Drawings

.062 COMM P&S SOK 24-30PTPPHBZ

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_640392-2_AB.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_640392-2_AB.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_640392-2_AB.3d_stp.zip

English

3D PDF

English

Customer View Model

ENG_CVM_640392-2_R.3d_igs.zip

English

Customer View Model

ENG_CVM_640392-2_R.3d_stp.zip

English

Customer View Model

ENG_CVM_640392-2_R.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Application Specification

English

640392-2

Socket Contact, Tin, 250 VAC, Locking Lance Contact Retention, 30 – 24 AWG Wire Size, .05 – .2 mm² Wire Size, Commercial Pin and Socket Connectors

