




MTA 100

TE Internal #: 3-641190-2

Connector Assembly, Receptacle, Mating Retention, Insulation
Displacement (IDC), Wire-to-Board, MTA 100, Standard
Rectangular Connectors

[View on TE.com >](#)

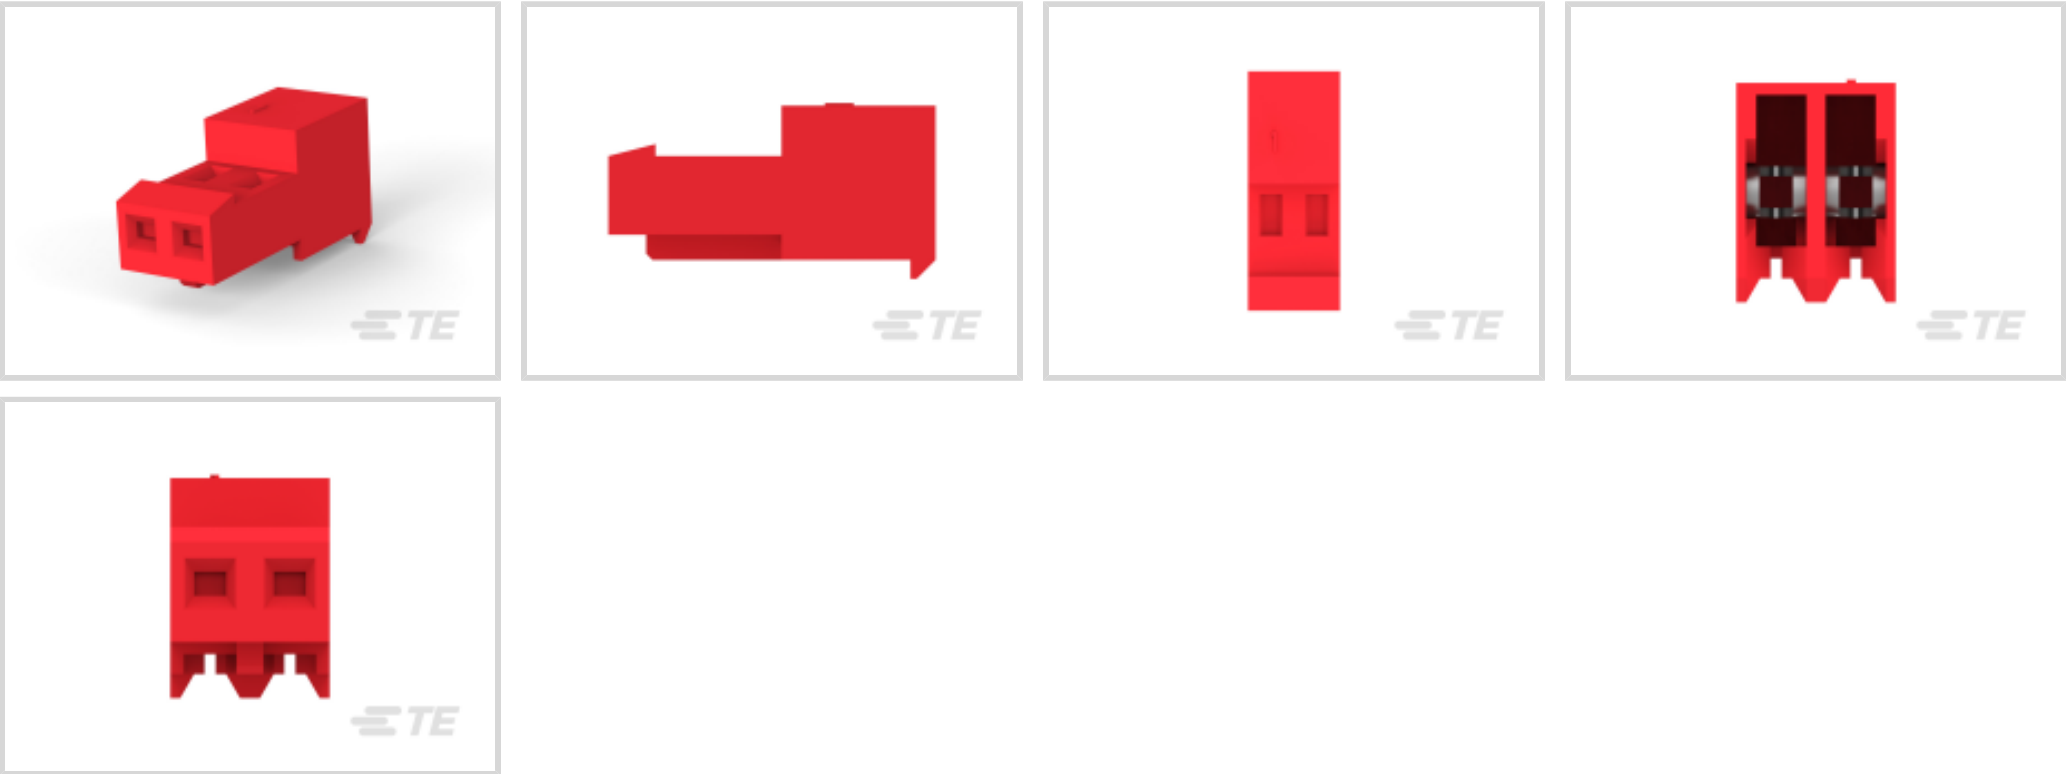Connectors > Rectangular Connectors > Standard Rectangular Connectors > Nylon Gold Plated Receptacle: 2.54 mm, no Mating Alignment



Connector Product Type: **Connector Assembly**
Connector & Housing Type: **Receptacle**
Mating Alignment: **Without**
Mating Retention: **With**
Mating Retention Type: **Locking Ramp**

[All Nylon Gold Plated Receptacle: 2.54 mm, no Mating Alignment \(89\)](#)

Features

Product Type Features

Connector Product Type	Connector Assembly
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Insertion Force Type	Normal
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Compatible With Discrete Wire Type	Stranded

Mechanical Attachment

Mating Alignment	Without
Mating Retention	With
Mating Retention Type	Locking Ramp
Connector Mounting Type	Cable Mount (Free-Hanging)
Contact Retention Type Within Housing	Locking Lance



Termination Features

Termination Method to Wire & Cable	Insulation Displacement (IDC)
------------------------------------	-------------------------------

Operation/Application

Shielded	No
Circuit Application	Signal

Contact Features

Contact Mating Area Plating Material	Gold Flash over Palladium Nickel, Gold
Contact Retention Within Housing	With
Contact Current Rating (Max)	5 A
Contact Underplating Material	Nickel
Wire Contact Termination Area Plating Material	Tin
Contact Type	Receptacle

Industry Standards

UL Flammability Rating	UL 94V-2
Compatible With Agency/Standards Products	UL, CSA
UL Rating	Recognized
Compatible With Approved Standards Products	UL E28476
CSA Rating	LR 7189

Configuration Features

Number of Positions	2
Number of Rows	1
Number of Cavities	2
Contacts Preloaded	Yes

Housing Features

Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	Nylon 6/6
Housing Color	Red

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------



Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Dimensions

Product Width	6.99 mm[.275 in]
Product Length	5.08 mm[.2 in]
Connector Height	13.21 mm[.52 in]
Wire Size	22 AWG

Packaging Features

Packaging Quantity	500
Packaging Method	Box & Carton

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer





This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>



Compatible Parts

 TE Part # 640550-2 02P MTA100 COVER	 TE Part # CAT-104MTA-PVUNH PCB Header: Polyester, Vertical, Unshrouded, No Mating Alignment	 TE Part # 3-647079-2 02P MTA100 HDR FLRAFB 15AU LF	 TE Part # CAT-104MTA-NYLCC Nylon PCB Connector Covers: 2.54 mm, MTA 100
 TE Part # 3-647167-2 02P MTA100 HDR ASSY SM 15AU LF	 TE Part # 58074-1 MTA 50/100/156 MANUAL TOOL FRAME	 TE Part # 58579-1 MTA 100 MANUAL TOOL ASSEMBLY DISCRETE	 TE Part # 3-647017-2 02P MTA100 PSTD CONN ASSY LF
 TE Part # 3-641127-2 02P MTA100 HDR ASSY FL/RA LF	 TE Part # 58246-3 MTA 100 CRIMP HEAD PRODUCTION RBBN CABLE	 TE Part # 58246-2 MTA 100 CRIMP HEAD PRODUCTION DISCRETE	

Also in the Series | MTA 100

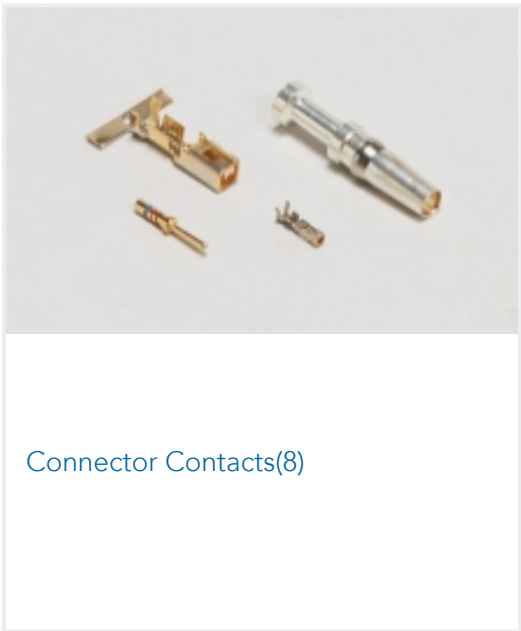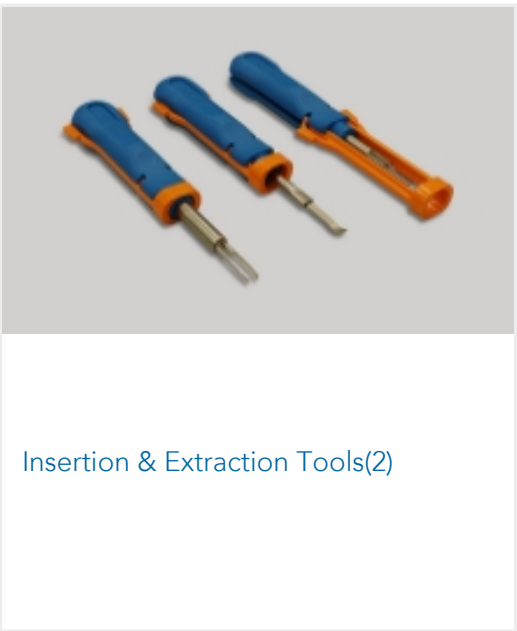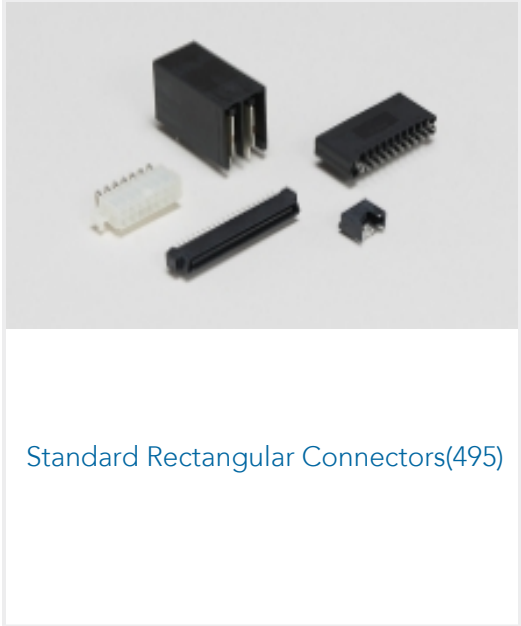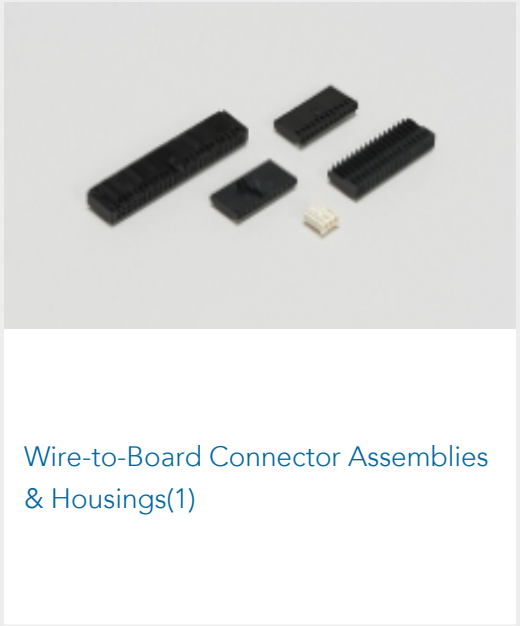 Connector Caps & Covers(69)	 Connector Contacts(8)	 Connector Hardware(1)	 Insertion & Extraction Tools(2)
 PCB Headers & Receptacles(441)	 Standard Rectangular Connectors(495)	 Wire-to-Board Connector Assemblies & Housings(1)	



Customers Also Bought



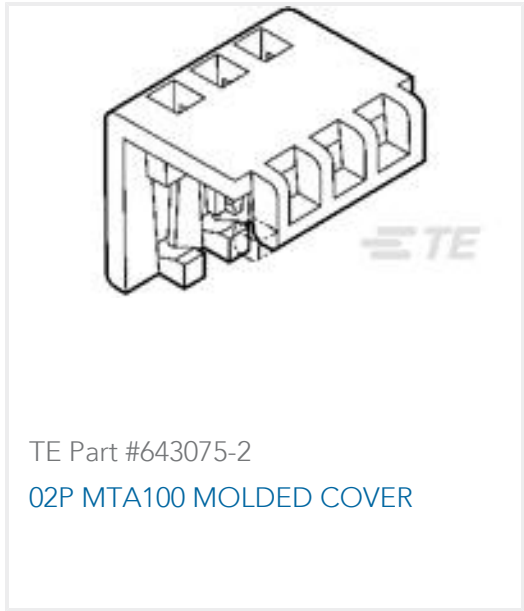
TE Part #5227726-3
ISOLATED BNC SOLDER JACK ASSY




TE Part #5227222-1
VERT JK W/MTG PINS, BNC PCB



TE Part #3-641190-6
06P MTA100 CONN ASSY RED LF



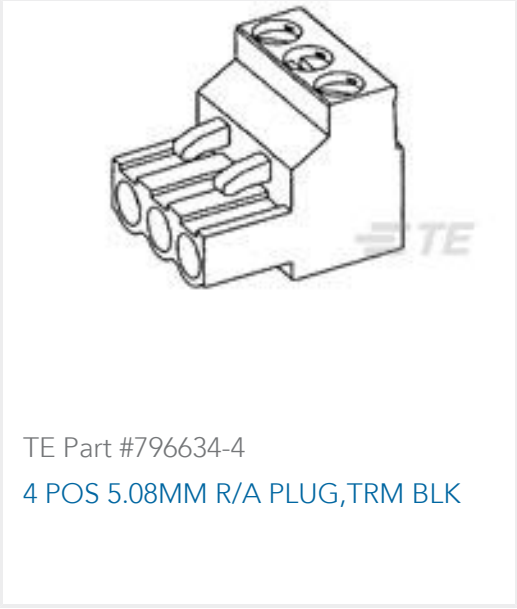TE Part #643075-2
02P MTA100 MOLDED COVER



TE Part #796634-4
4 POS 5.08MM R/A PLUG,TRM BLK



TE Part #5745171-2
SIZE 1 ASSY KIT .200



TE Part #3-640428-3
03P MTA156 CONN ASSY 22AWG RED



TE Part #1-534206-8
36 MODII VRT DR CE 100/115



TE Part #87631-6
10 MODIV HSG DR MRKD .100 POL



TE Part #Y1503
YAGI,GLD,3,150-174MHz 17,7.1dBi, YM78HD

Documents

Product Drawings

02P MTA100 CONN ASSY RED LF

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-641190-2_S.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-641190-2_S.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-641190-2_S.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



[Product Specifications](#)

[Application Specification](#)

English