




Terminals & Splices > Quick Disconnects

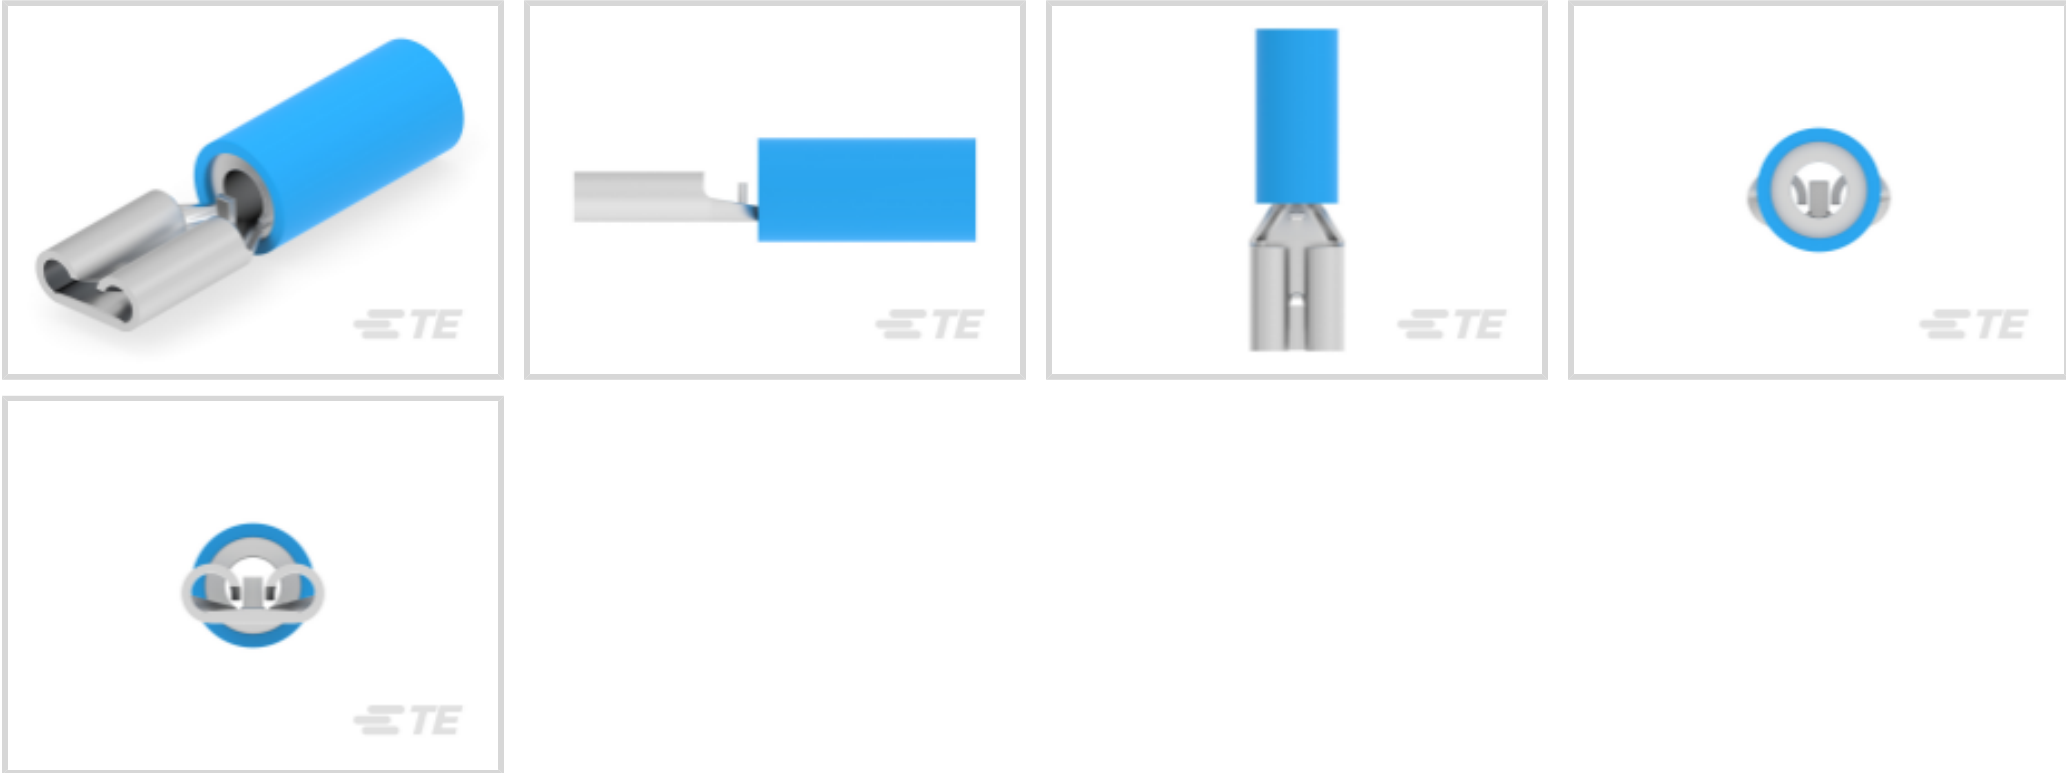

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **2050 – 5180 CMA**

Mating Tab Width: **4.75 mm [.187 in]**

Features

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	4.75 mm[.187 in]
Mating Tab Thickness	.51 mm[.02 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	Compression
Barrel Type	Closed

Dimensions

Wire Size	2050 – 5180 CMA
Product Length	20.36 mm[.8 in]
Compatible Insulation Diameter Range	4.32 mm[.17 in]
Terminal Material Thickness	.41 mm[.016 in]

Packaging Features

Packaging Method	Reel
Packaging Quantity	4000



Product Type Features

Insertion Force	Normal
Terminal Features	Wire Stop

Usage Conditions

Insulation Option	Partially Insulated
Operating Temperature Range	105 °C[221 °F]

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant
Barrel Color	Blue

Electrical Characteristics

Voltage Rating	300 V
----------------	-------

Body Features

Insulation Material	Nylon
---------------------	-------

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Industry Standards

Compatible With Agency/Standards Products	RU (UL Component Program), CSA
---	--------------------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC



Free

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 567200-3
APPL,HDM,TAPE 9CB W/O DIES G

TE Part # 687658-1
APPL,HDM,TAPE 9 CB W/O DIES T

Also in the Series | FASTON 187

Crimp Terminal Housings(41)

Insertion & Extraction Tools(1)

Joints & Splices(1)

PCB Terminals(42)

Quick Disconnects(207)

Splices(1)

Customers Also Bought



TE Part #HD34-24-19PE
REC, 19P, AL, E, 12/16, P



TE Part #1-327717-2
PIDG SPD 22-16 COMM 22-18MIL 4



TE Part #2-33460-2
TERMINAL,SOLIS R 8 10




TE Part #1-480711-0
15P UMNL CAP HSG NATL




TE Part #640917-2
RECEPT,PIDG FASTON 22-18 187




TE Part #2-32945-1
PG R 22-16 COMM 22-18 MIL 6

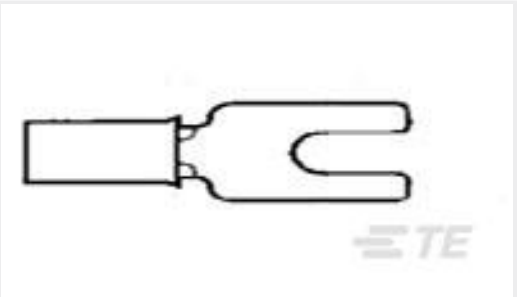

TE Part #2-327735-1
PG SPD 22-16 COMM 22-18 MIL 6

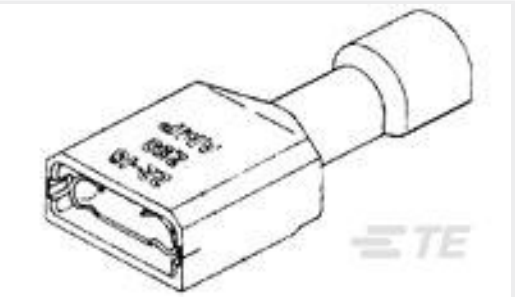

TE Part #3-520116-2
ULTRA-FAST 250 ASY REC 16-14 AWG TPBR

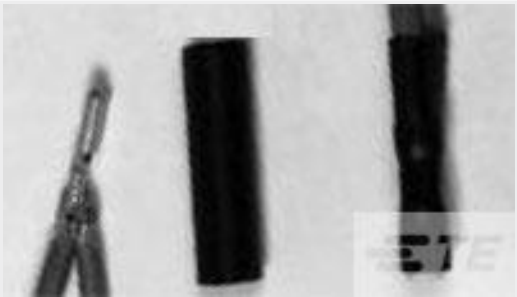

TE Part #520197P044
RT-3-NO.2-0-1.125IN



TE Part #EF5321-000
VERSAFIT-HW-NO.3-N5-0-1.5IN

Documents

Product Drawings

RECEPT,PIDG FASTON 16-14 187

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_640919-2_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_640919-2_G.3d_igs.zip

English

Customer View Model

ENG_CVM_640919-2_G.3d_stp.zip

English

3D PDF

3D



Customer View Model

[ENG_CVM_CVM_640919-2_F.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_640919-2_F.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_640919-2_F.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[PIDG_FASTON](#)

English

[Ultra-Fast and Ultra Fast Plus](#)

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[UL Report](#)

English