

AMP


TE Internal #: 2-530666-6

Board-to-Board, 22 Position, 3.96 mm [.156 in] Centerline, Solder Eyelet, 22 Dual Positions, 2 Row, Green, Standard Edge Connectors

[View on TE.com >](#)



Connectors > PCB Connectors > Card Edge Connectors > Standard Edge Connectors

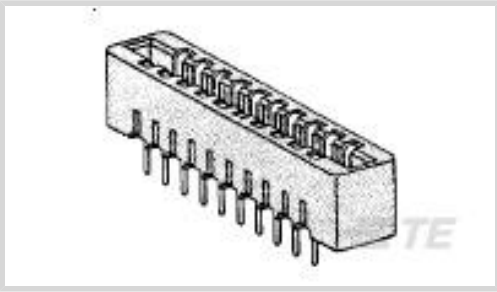

EU RoHS Compliance: **Not Compliant**

EU ELV Compliance: **Compliant with Exemptions**

Connector System: **Board-to-Board**

Number of Positions: **22**

Centerline (Pitch): **3.96 mm [.156 in]**

Features

Other

EU RoHS Compliance	Not Compliant
EU ELV Compliance	Compliant with Exemptions

Product Type Features

Connector System	Board-to-Board
Connector & Housing Type	Receptacle
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	22
Number of Dual Positions	22
Number of Rows	2
Connector Contact Load Condition	Fully Loaded
PCB Mount Orientation	Vertical

Body Features

Primary Product Color	Green
-----------------------	-------

Contact Features

Contact Underplating Material	Nickel
Contact Retention Within Housing	With
PCB Contact Termination Area Plating Material Finish	Bright



Contact Mating Area Plating Material Thickness	.76 µm
PCB Contact Termination Area Plating Material Thickness	2.54 µm[100 µin]
Contact Mating Area Plating Material	Gold
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin
Contact Type	Socket
Contact Current Rating (Max)	5 A

Termination Features

Termination Method to PCB	Through Hole - Solder
Termination Post & Tail Length	3.81 mm[.15 in]
Termination Method to Wire & Cable	Solder Eyelet

Mechanical Attachment

PCB Mount Retention	Without
Contact Retention Type Within Housing	Locking Lance
Mating Retention	Without
Mating Alignment	Without
PCB Mount Alignment	Without
Connector Mounting Type	Board Mount

Housing Features

Centerline (Pitch)	3.96 mm[.156 in]
Housing Material	Glass-Filled Polyester

Dimensions

Card Slot Depth	7.49 mm[.29 in]
Connector Height	11.68 mm[.46 in]
Row-to-Row Spacing	5.08 mm[.2 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Packaging Features

Packaging Quantity	90
Packaging Method	Box



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (13% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 240°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Customers Also Bought



TE Part #DTM13-12PA
HDR, 12P, GRY, RA, SN/NI/CU, A

TE Part #206138-8
CLAMP CBL SHELL SIZE 23

TE Part #641973-1
12P UMNL PIN HDR ASSY V2 NATL

TE Part #1586176-1
12P UMNL PIN HDR 94VO NDH

TE Part #3-456405-4
CRIMPER, WIRE .080 "F"

TE Part #4-1437175-0
FSP-22.25A

TE Part #7-1633131-1
ANVIL, COMBINATION .080

TE Part #1-1437436-6
CR0111=34123-00-RETAINING SPRING KIT

TE Part #354554-1
LEADIN

Documents

Product Drawings
CONN LOW PRO 22 POS 156X200C/L
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_2-530666-6_P.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_2-530666-6_P.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_2-530666-6_P.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Product Specifications



Product Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

REPLACING CONTACTS IN AMP LOW PROFILE EDGE CONNECTORS

English

Agency Approvals

UL Report

English