


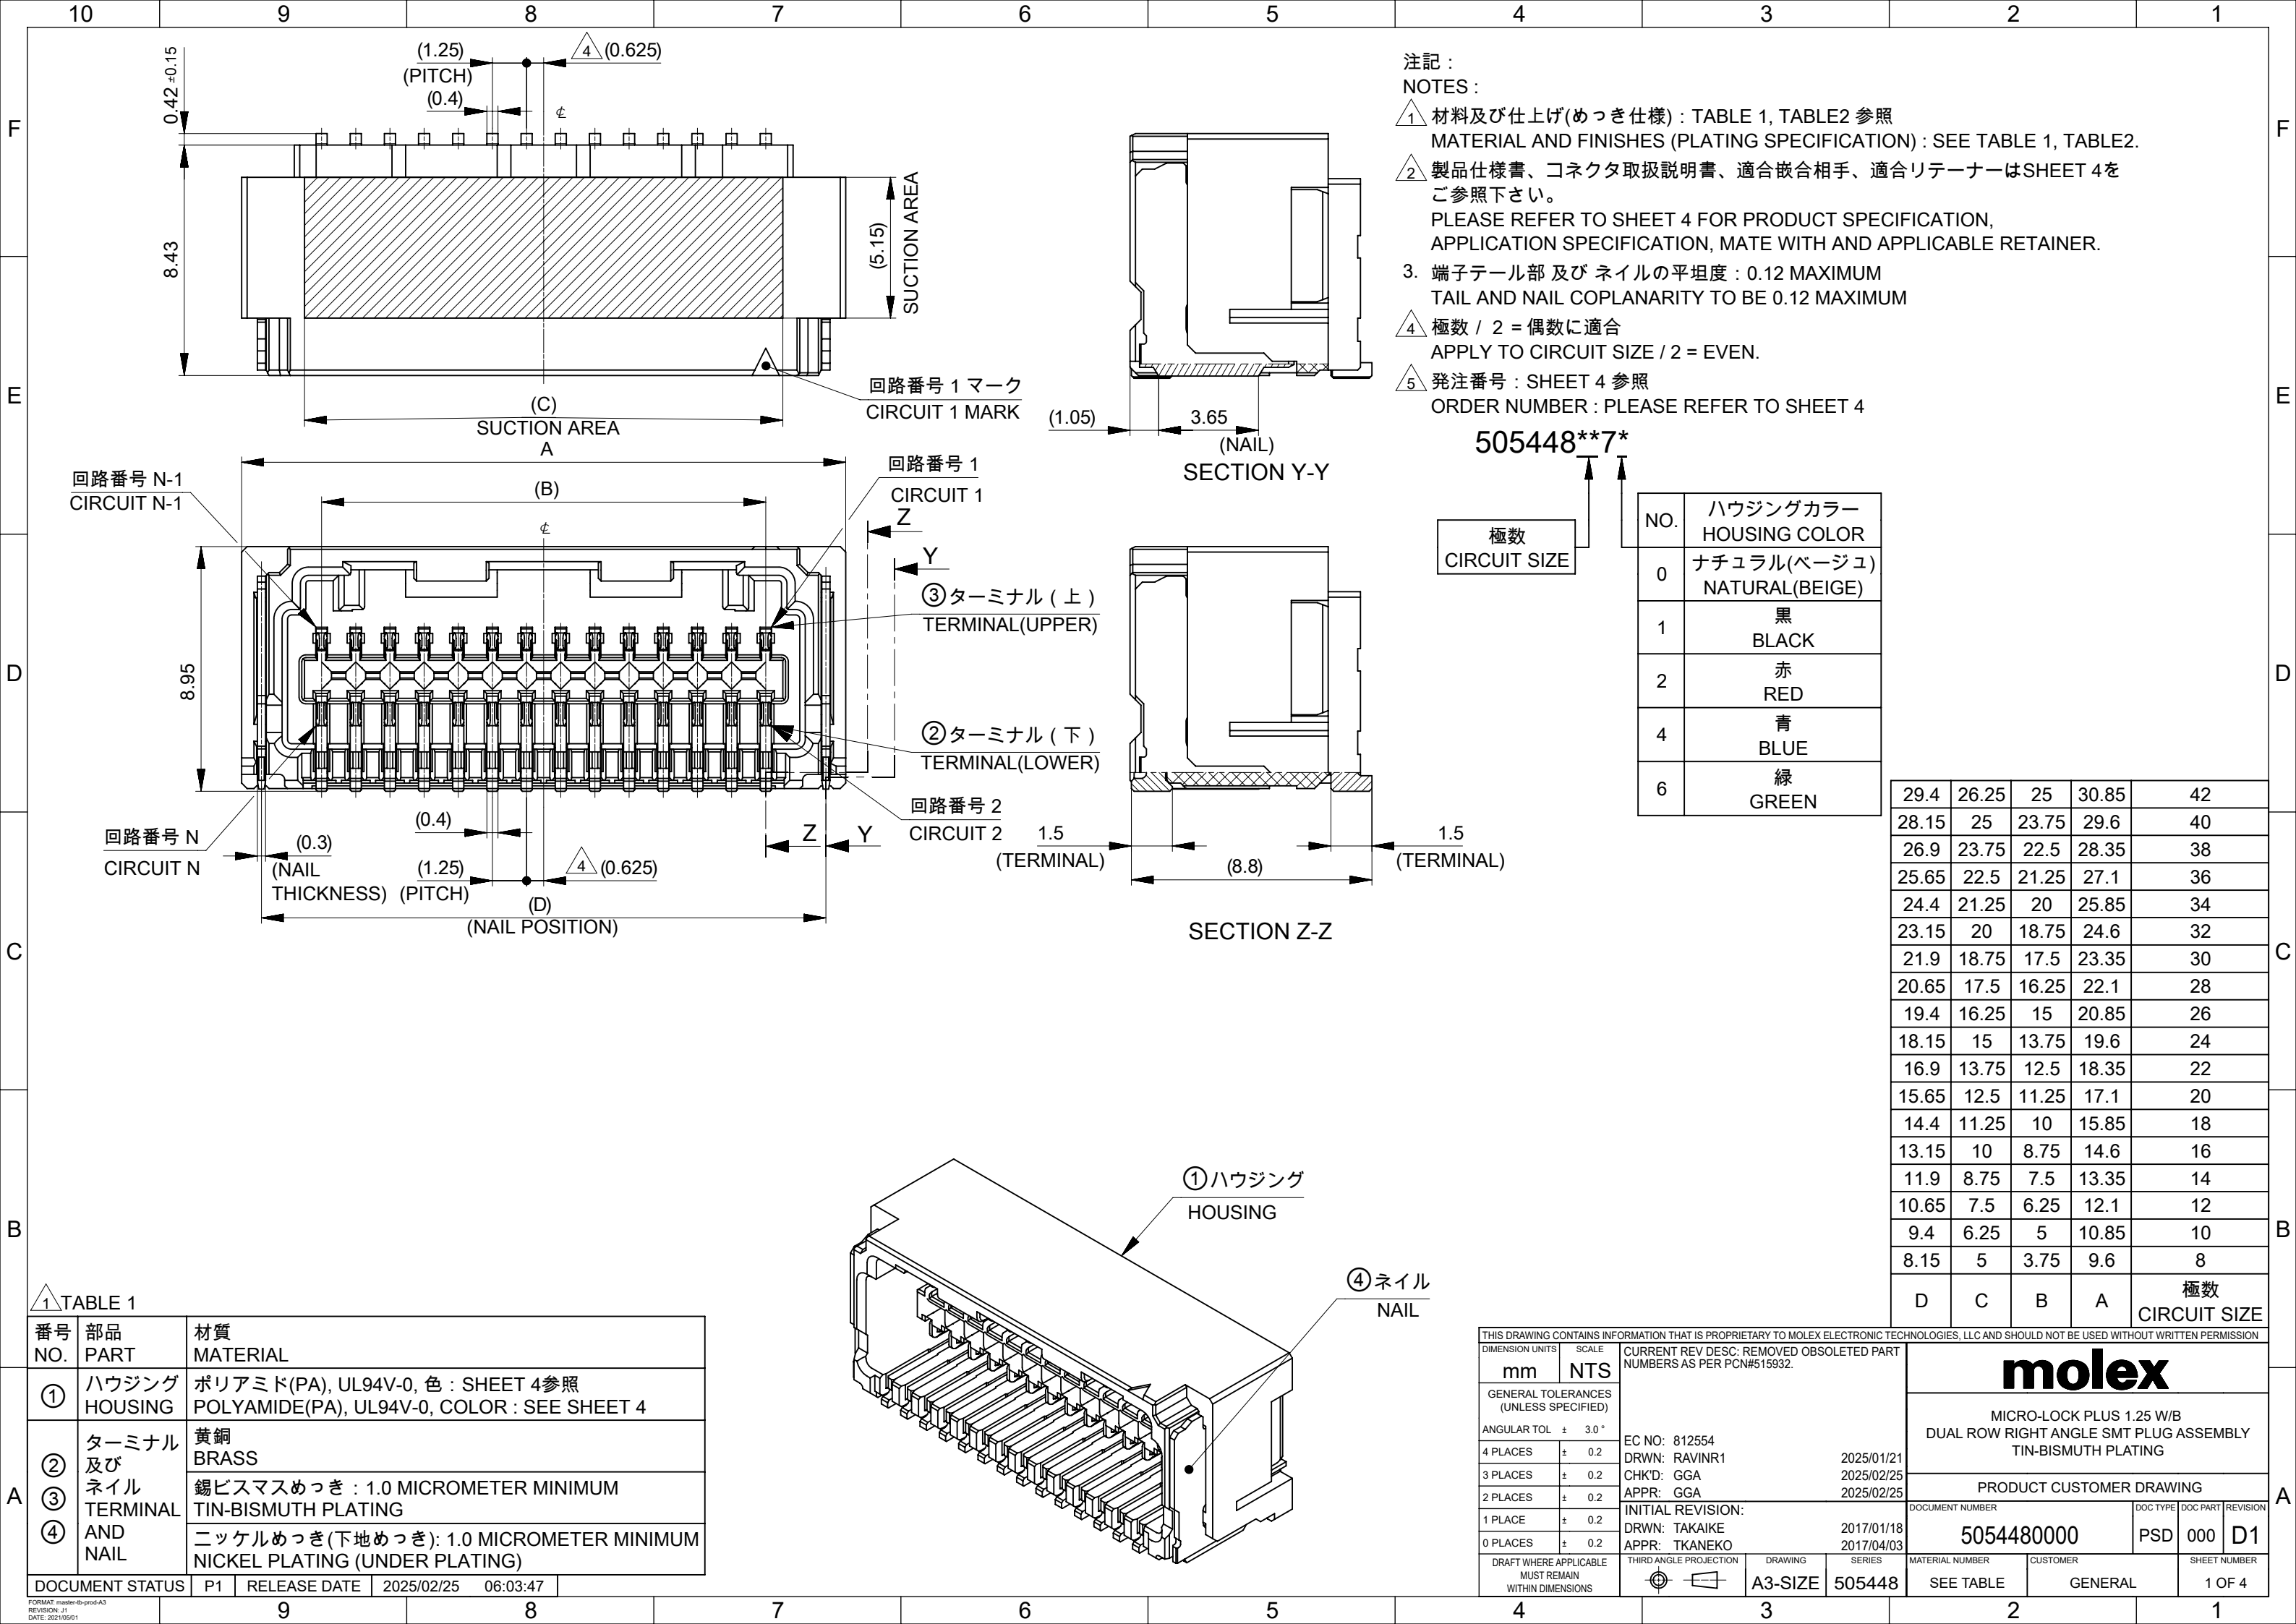

注記:
NOTES:

- 1 材料及び仕上げ(めっき仕様): TABLE 1, TABLE2 参照
MATERIAL AND FINISHES (PLATING SPECIFICATION): SEE TABLE 1, TABLE2.
- 2 製品仕様書、コネクタ取扱説明書、適合嵌合相手、適合リテーナーはSHEET 4を
ご参照下さい。
PLEASE REFER TO SHEET 4 FOR PRODUCT SPECIFICATION,
APPLICATION SPECIFICATION, MATE WITH AND APPLICABLE RETAINER.
- 3 端子テール部 及び ネイルの平坦度: 0.12 MAXIMUM
TAIL AND NAIL COPLANARITY TO BE 0.12 MAXIMUM
- 4 極数 / 2 = 偶数に適合
APPLY TO CIRCUIT SIZE / 2 = EVEN.
- 5 発注番号: SHEET 4 参照
ORDER NUMBER: PLEASE REFER TO SHEET 4

505448**7*


極数
CIRCUIT SIZE

NO.	ハウジングカラー HOUSING COLOR
0	ナチュラル(ベージュ) NATURAL(BEIGE)
1	黒 BLACK
2	赤 RED
4	青 BLUE
6	緑 GREEN


29.4	26.25	25	30.85	42
28.15	25	23.75	29.6	40
26.9	23.75	22.5	28.35	38
25.65	22.5	21.25	27.1	36
24.4	21.25	20	25.85	34
23.15	20	18.75	24.6	32
21.9	18.75	17.5	23.35	30
20.65	17.5	16.25	22.1	28
19.4	16.25	15	20.85	26
18.15	15	13.75	19.6	24
16.9	13.75	12.5	18.35	22
15.65	12.5	11.25	17.1	20
14.4	11.25	10	15.85	18
13.15	10	8.75	14.6	16
11.9	8.75	7.5	13.35	14
10.65	7.5	6.25	12.1	12
9.4	6.25	5	10.85	10
8.15	5	3.75	9.6	8
D	C	B	A	極数 CIRCUIT SIZE

1 TABLE 1

番号 NO.	部品 PART	材質 MATERIAL
1	ハウジング HOUSING	ポリアミド(PA), UL94V-0, 色: SHEET 4参照 POLYAMIDE(PA), UL94V-0, COLOR: SEE SHEET 4
2	ターミナル 及び ネイル AND NAIL	黄銅 BRASS
3		錫ビスマスめっき: 1.0 MICROMETER MINIMUM TIN-BISMUTH PLATING
4		ニッケルめっき(下地めっき): 1.0 MICROMETER MINIMUM NICKEL PLATING (UNDER PLATING)
DOCUMENT STATUS		P1 RELEASE DATE 2025/02/25 06:03:47

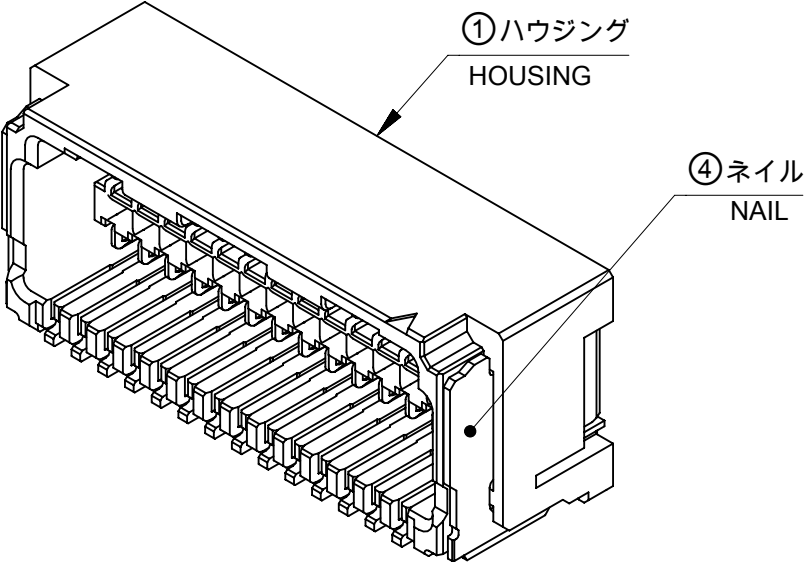

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#515932.			molex				
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)				MICRO-LOCK PLUS 1.25 W/B DUAL ROW RIGHT ANGLE SMT PLUG ASSEMBLY TIN-BISMUTH PLATING							
ANGULAR TOL ± 3.0°											
4 PLACES		± 0.2		EC NO: 812554			PRODUCT CUSTOMER DRAWING				
3 PLACES		± 0.2		DRWN: RAVINR1 2025/01/21							
2 PLACES		± 0.2		CHK'D: GGA 2025/02/25							
1 PLACE		± 0.2		APPR: GGA 2025/02/25			DOCUMENT NUMBER 5054480000				
0 PLACES		± 0.2		INITIAL REVISION: DRWN: TAKAIKE 2017/01/18 APPR: TKANEKO 2017/04/03						DOC TYPE PSD	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				THIRD ANGLE PROJECTION		DRAWING		DOC PART 000		REVISION D1	
						A3-SIZE		SERIES 505448		SHEET NUMBER 1 OF 4	
						MATERIAL NUMBER SEE TABLE		CUSTOMER GENERAL			

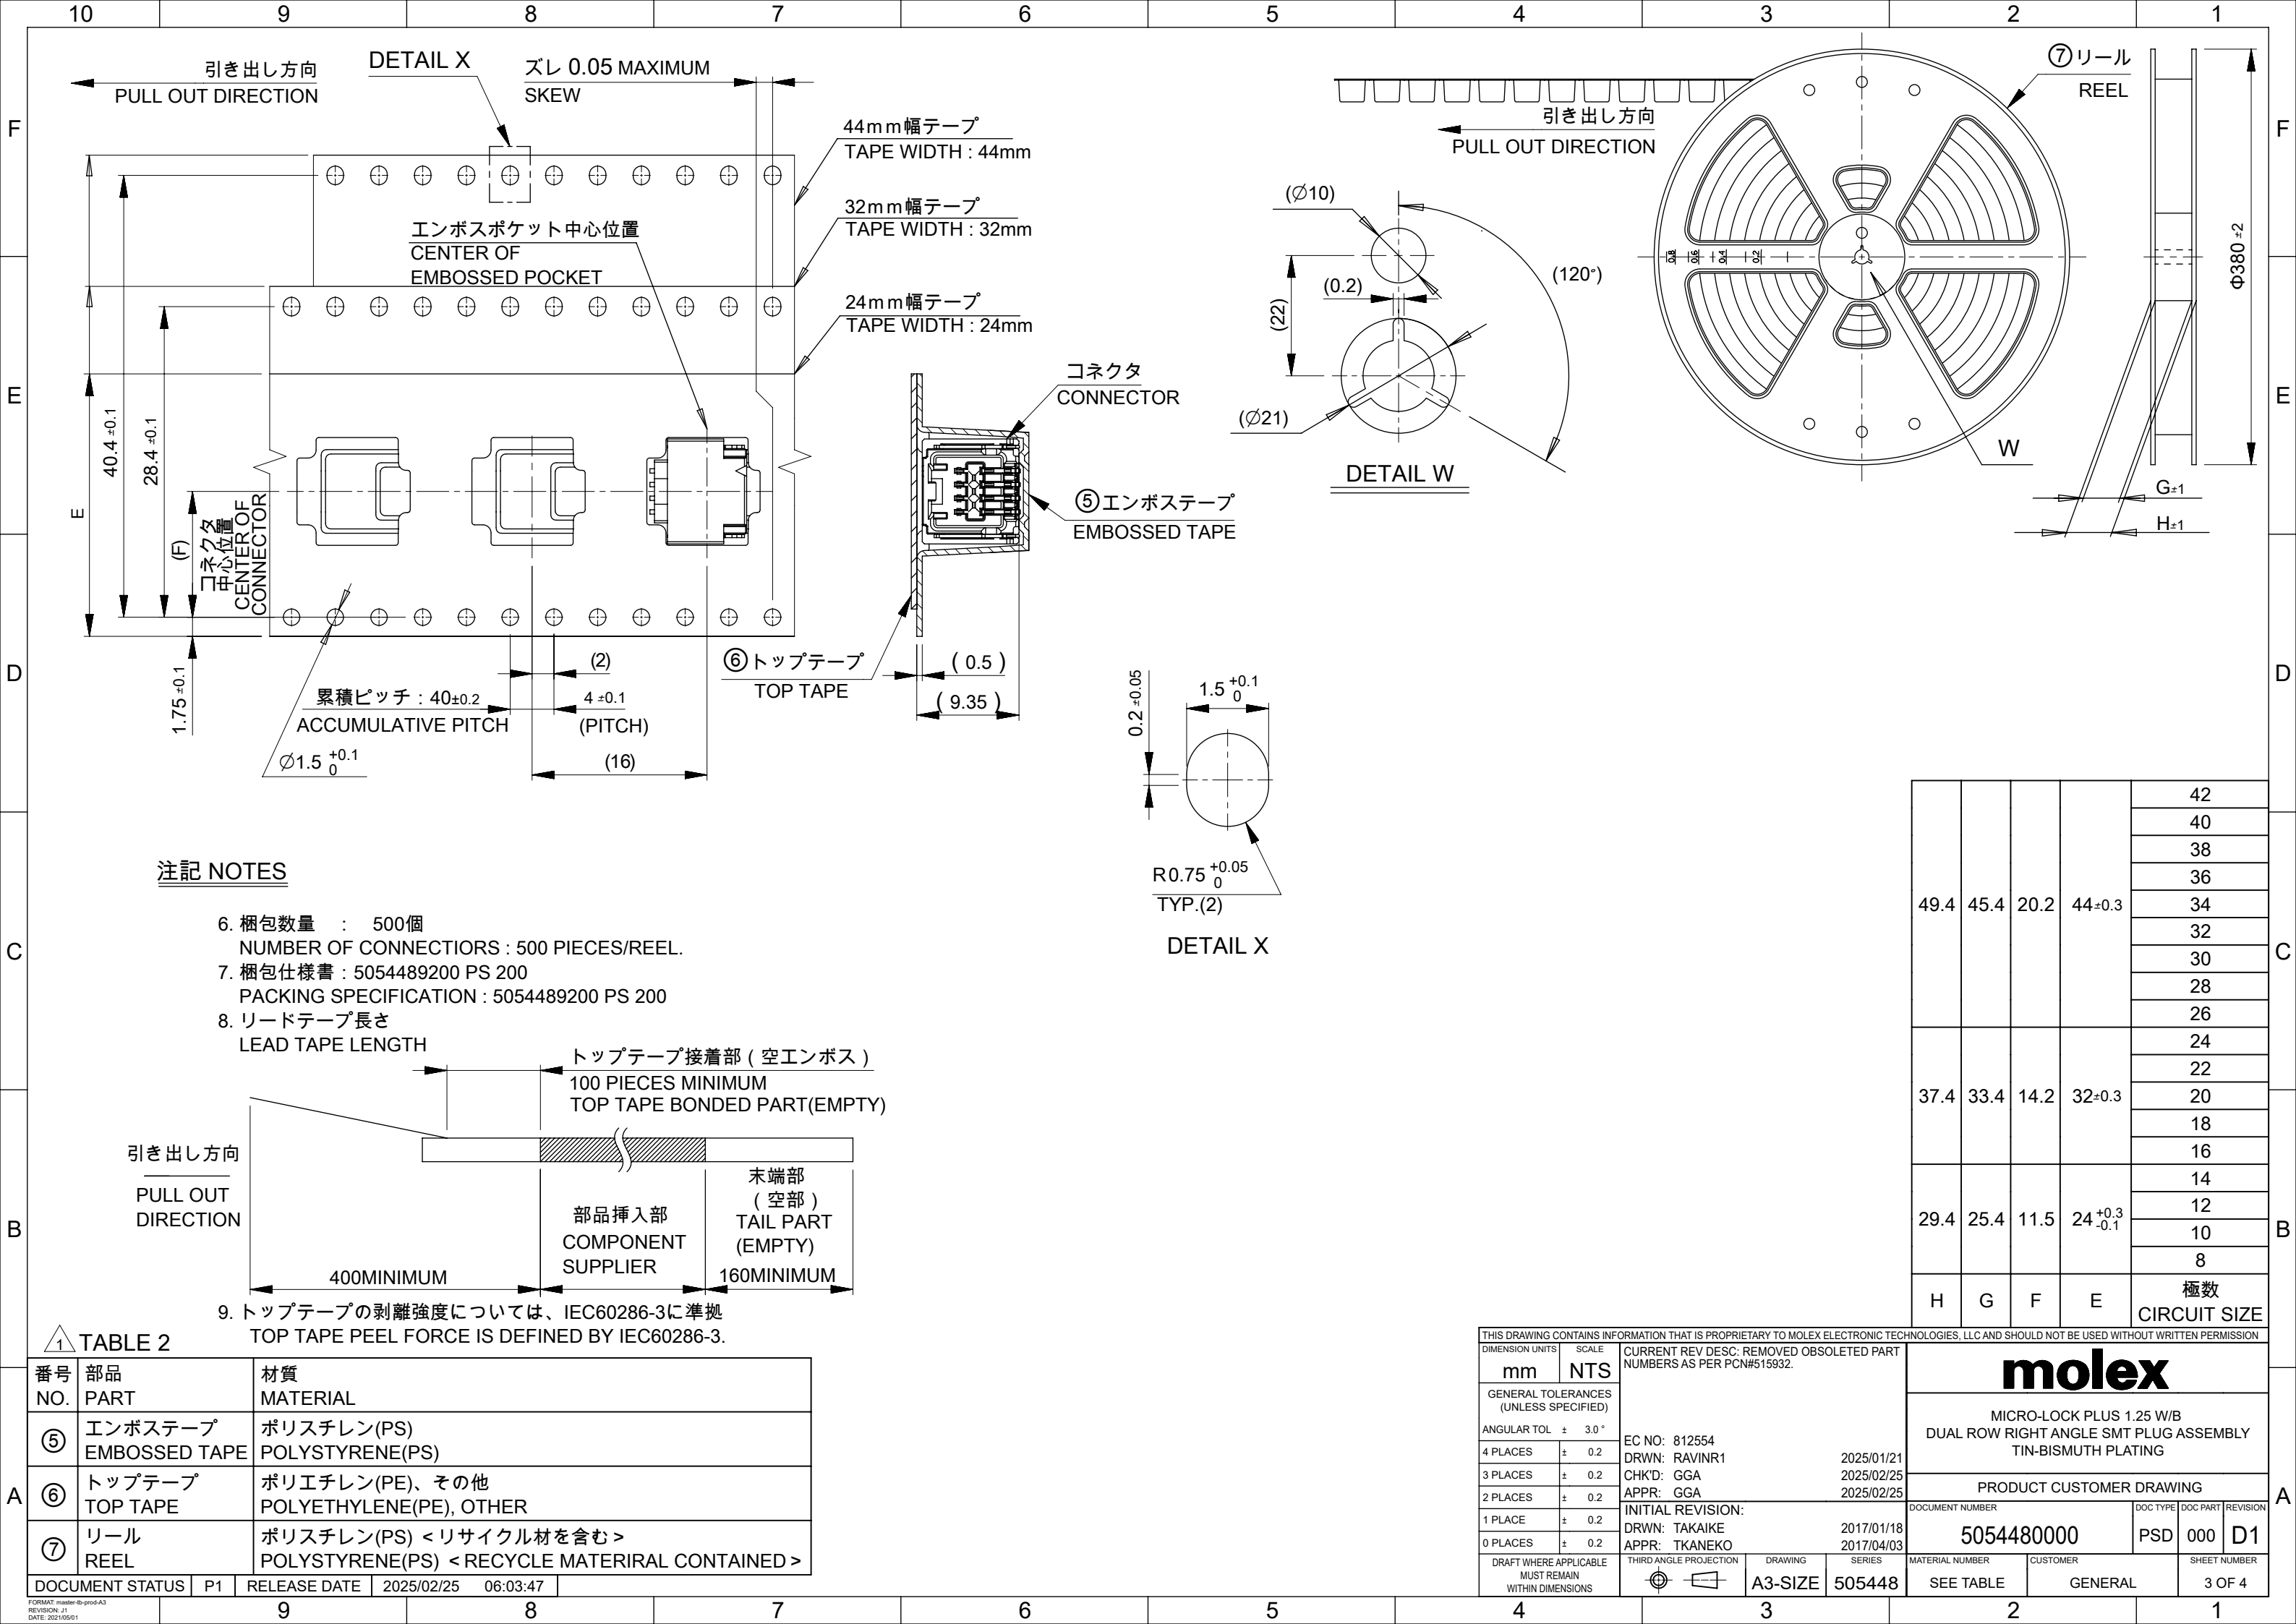

注記 NOTES

6. 梱包数量 : 500個
NUMBER OF CONNECTORS : 500 PIECES/REEL.
7. 梱包仕様書 : 5054489200 PS 200
PACKING SPECIFICATION : 5054489200 PS 200
8. リードテープ長さ
LEAD TAPE LENGTH
9. トップテープの剥離強度については、IEC60286-3に準拠
TOP TAPE PEEL FORCE IS DEFINED BY IEC60286-3.

TABLE 2

番号 NO.	部品 PART	材質 MATERIAL
⑤	エンボステープ EMBOSSSED TAPE	ポリスチレン(PS) POLYSTYRENE(PS)
⑥	トップテープ TOP TAPE	ポリエチレン(PE)、その他 POLYETHYLENE(PE), OTHER
⑦	リール REEL	ポリスチレン(PS) <リサイクル材を含む> POLYSTYRENE(PS) < RECYCLE MATERIRAL CONTAINED >

DOCUMENT STATUS	P1	RELEASE DATE	2025/02/25	06:03:47
-----------------	----	--------------	------------	----------

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											
DIMENSION UNITS		SCALE		CURRENT REV DESC: REMOVED OBSOLETE PART NUMBERS AS PER PCN#515932.				molex			
mm		NTS									
GENERAL TOLERANCES (UNLESS SPECIFIED)				MICRO-LOCK PLUS 1.25 W/B DUAL ROW RIGHT ANGLE SMT PLUG ASSEMBLY TIN-BISMUTH PLATING							
ANGULAR TOL ± 3.0 °											
4 PLACES		± 0.2		EC NO: 812554		PRODUCT CUSTOMER DRAWING					
3 PLACES		± 0.2		DRWN: RAVINR1 2025/01/21							
2 PLACES		± 0.2		CHK'D: GGA 2025/02/25							
1 PLACE		± 0.2		APPR: GGA 2025/02/25		INITIAL REVISION:					
0 PLACES		± 0.2		DRWN: TAKAIKE 2017/01/18							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				APPR: TKANEKO 2017/04/03		DOCUMENT NUMBER		DOC TYPE	DOC PART	REVISION	
				THIRD ANGLE PROJECTION		DRAWING	SERIES	5054480000		PSD	000
						MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
				A3-SIZE		505448		SEE TABLE		GENERAL	3 OF 4

