

160914-4 ✓ ACTIVE

FASTIN-FASTON | FASTIN-FASTON 250

TE Internal #: 160914-4

Receptacle, 11 – 10 AWG Wire Size, 4 – 5.2 mm<sup>2</sup> Wire Size, Mating Tab Width 6.35 mm [.25 in], Straight, FASTIN-FASTON 250, Quick Disconnects

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **4 – 5.2 mm<sup>2</sup>**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

## Features

### Mechanical Attachment

	.053 in
Wire Insulation Support	With
Mating Retention Type	Locking Lance

### Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm [.25 in]
Mating Tab Thickness	.81 mm [.032 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

### Dimensions

Wire Size	4 – 5.2 mm <sup>2</sup>
Product Length	19.2 mm [.755 in]



Compatible Insulation Diameter Range	4 – 5.2 mm [.157 – .205 in]
Terminal Material Thickness	.41 mm [.016 in]

### Packaging Features

Packaging Method	Strip/Reel
Packaging Quantity	4000

### Product Type Features

Insertion Force	Normal
-----------------	--------

### Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C [-40 – 230 °F]

### Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

### Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

### Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

### Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

## Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 1-1579007-4  
EXTRACTION TOOL



TE Part # 4-1579007-3  
EXTRACTION TOOL KIT



TE Part # 151667-2  
FF 375 REC 4-6MM2 TPBR



TE Part # 539745-2  
DIE F6.3FF REC.



TE Part # 151667-4  
FF 375 REC TERMINAL 11-10 AWG PBR



TE Part # 2150402-1  
OCEAN-2.0-APPLICATOR-E-160F220F-REM



TE Part # 2150402-2  
OCEAN-2.0-APPLICATOR-E-160F220F-REA



TE Part # 7-2150402-7  
OCEAN\_2.0\_SPARE\_PART\_KIT-160F220F




TE Part # 160920-4  
FF 312 REC 2.5-4MM2 TPPB

Also in the Series | **FASTIN-FASTON 250**



Crimp Terminal Housings(207)

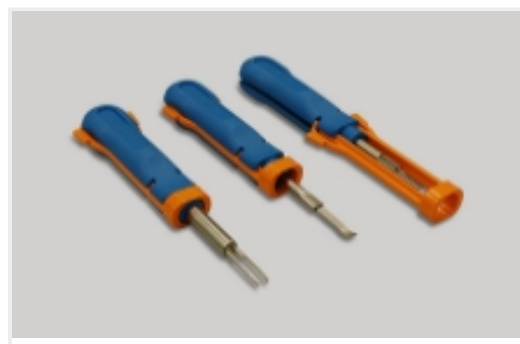

Insertion & Extraction Tools(2)



PCB Terminals(2)



Quick Disconnects(250)


## Customers Also Bought




TE Part #2-1564514-1  
Heavy Duty Sealed Connector Series Housings



TE Part #1-1414147-0  
V23134J0052X429-EV-CBOX

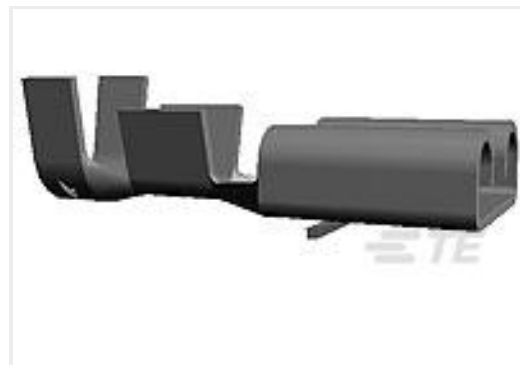


TE Part #160913-4  
FF 250 REC 2.5-4.0MM2 TPPB

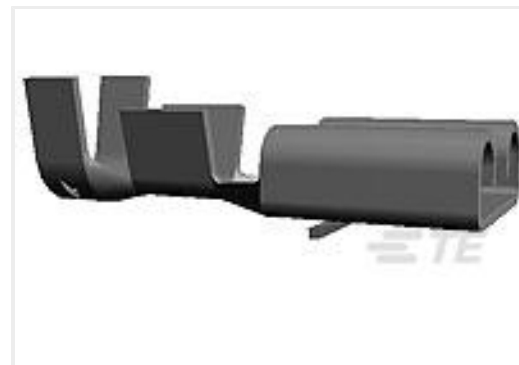


TE Part #5-160558-9  
FF 250 REC 0.5-1.5MM2 TPPB




TE Part #DRC40-BT-90DEG  
BOOT, 40P, 16SZ, PLG/REC, RA, BLK

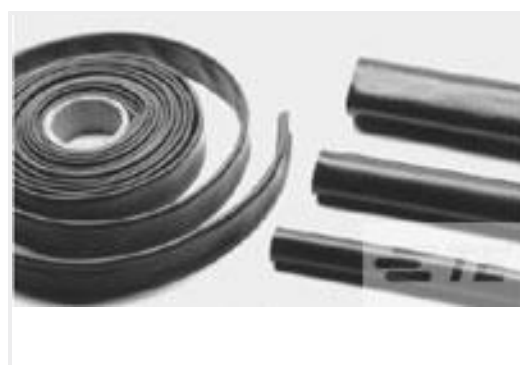

TE Part #CB5430-000  
XFFR-03X4

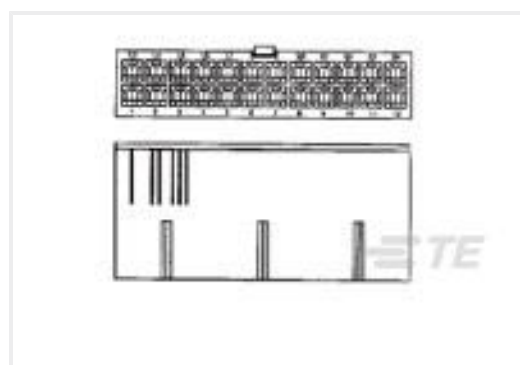

TE Part #1-1586000-0  
10P FH PLUG VAL-U-LOK V2

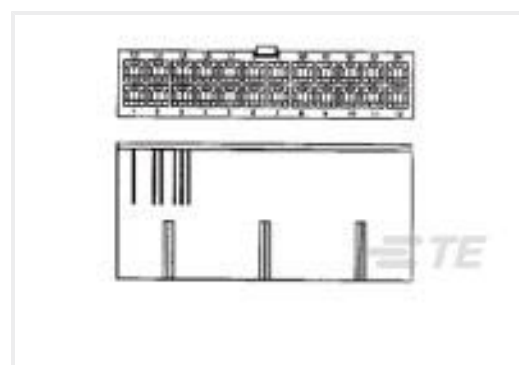

TE Part #1-1586000-2  
12P FH PLUG VAL-U-LOK V2

## Documents

### Product Drawings

[FF 250 REC 4-6MM2 TPPB](#)

English

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_160914-4\\_M.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_160914-4\\_M.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_160914-4\\_M.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.



---

[Product Specifications](#)

[Application Specification](#)

German