

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	L1	ECR-25-239014	17NOV2025	SA	PS

- 1
- .00254[.000100] BRIGHT TIN-LEAD OVER
.00127[.000050] NICKEL.
- 2
- POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION
OF THE POST AND THE HOUSING.
- 4
- ON ASSEMBLIES WITH FOUR OR MORE POSITIONS,
TWO POLARIZATION SLOTS.
ON ASSEMBLIES WITH TWO OR THREE POSITIONS,
ONE POLARIZATION SLOT.
- 5
- .00254[.000100] MATTE TIN OVER
.00127[.000050] NICKEL.
- 6
- HIGH TEMPERATURE CONFIGURATION.
- 7
- STANDOFF NOT PRESENT ON UNDERSIDE OF ASSEMBLY
- 8
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 9
- 0.25 [.010] RECESS PERMISSIBLE IN THIS AREA FOR MOLD SHUT OFF

D

C

B



A

D

C

B

A

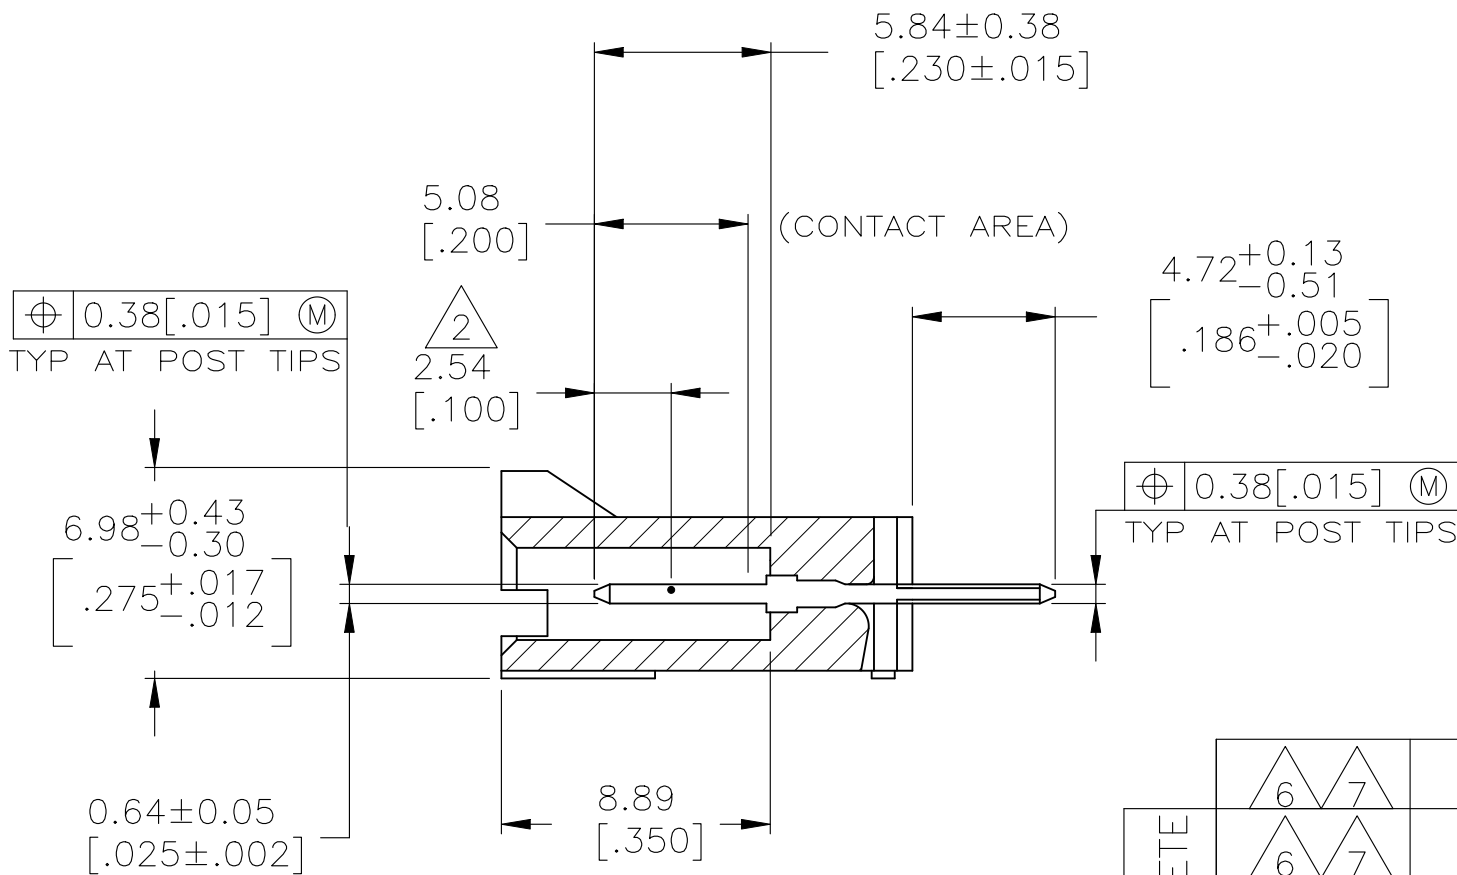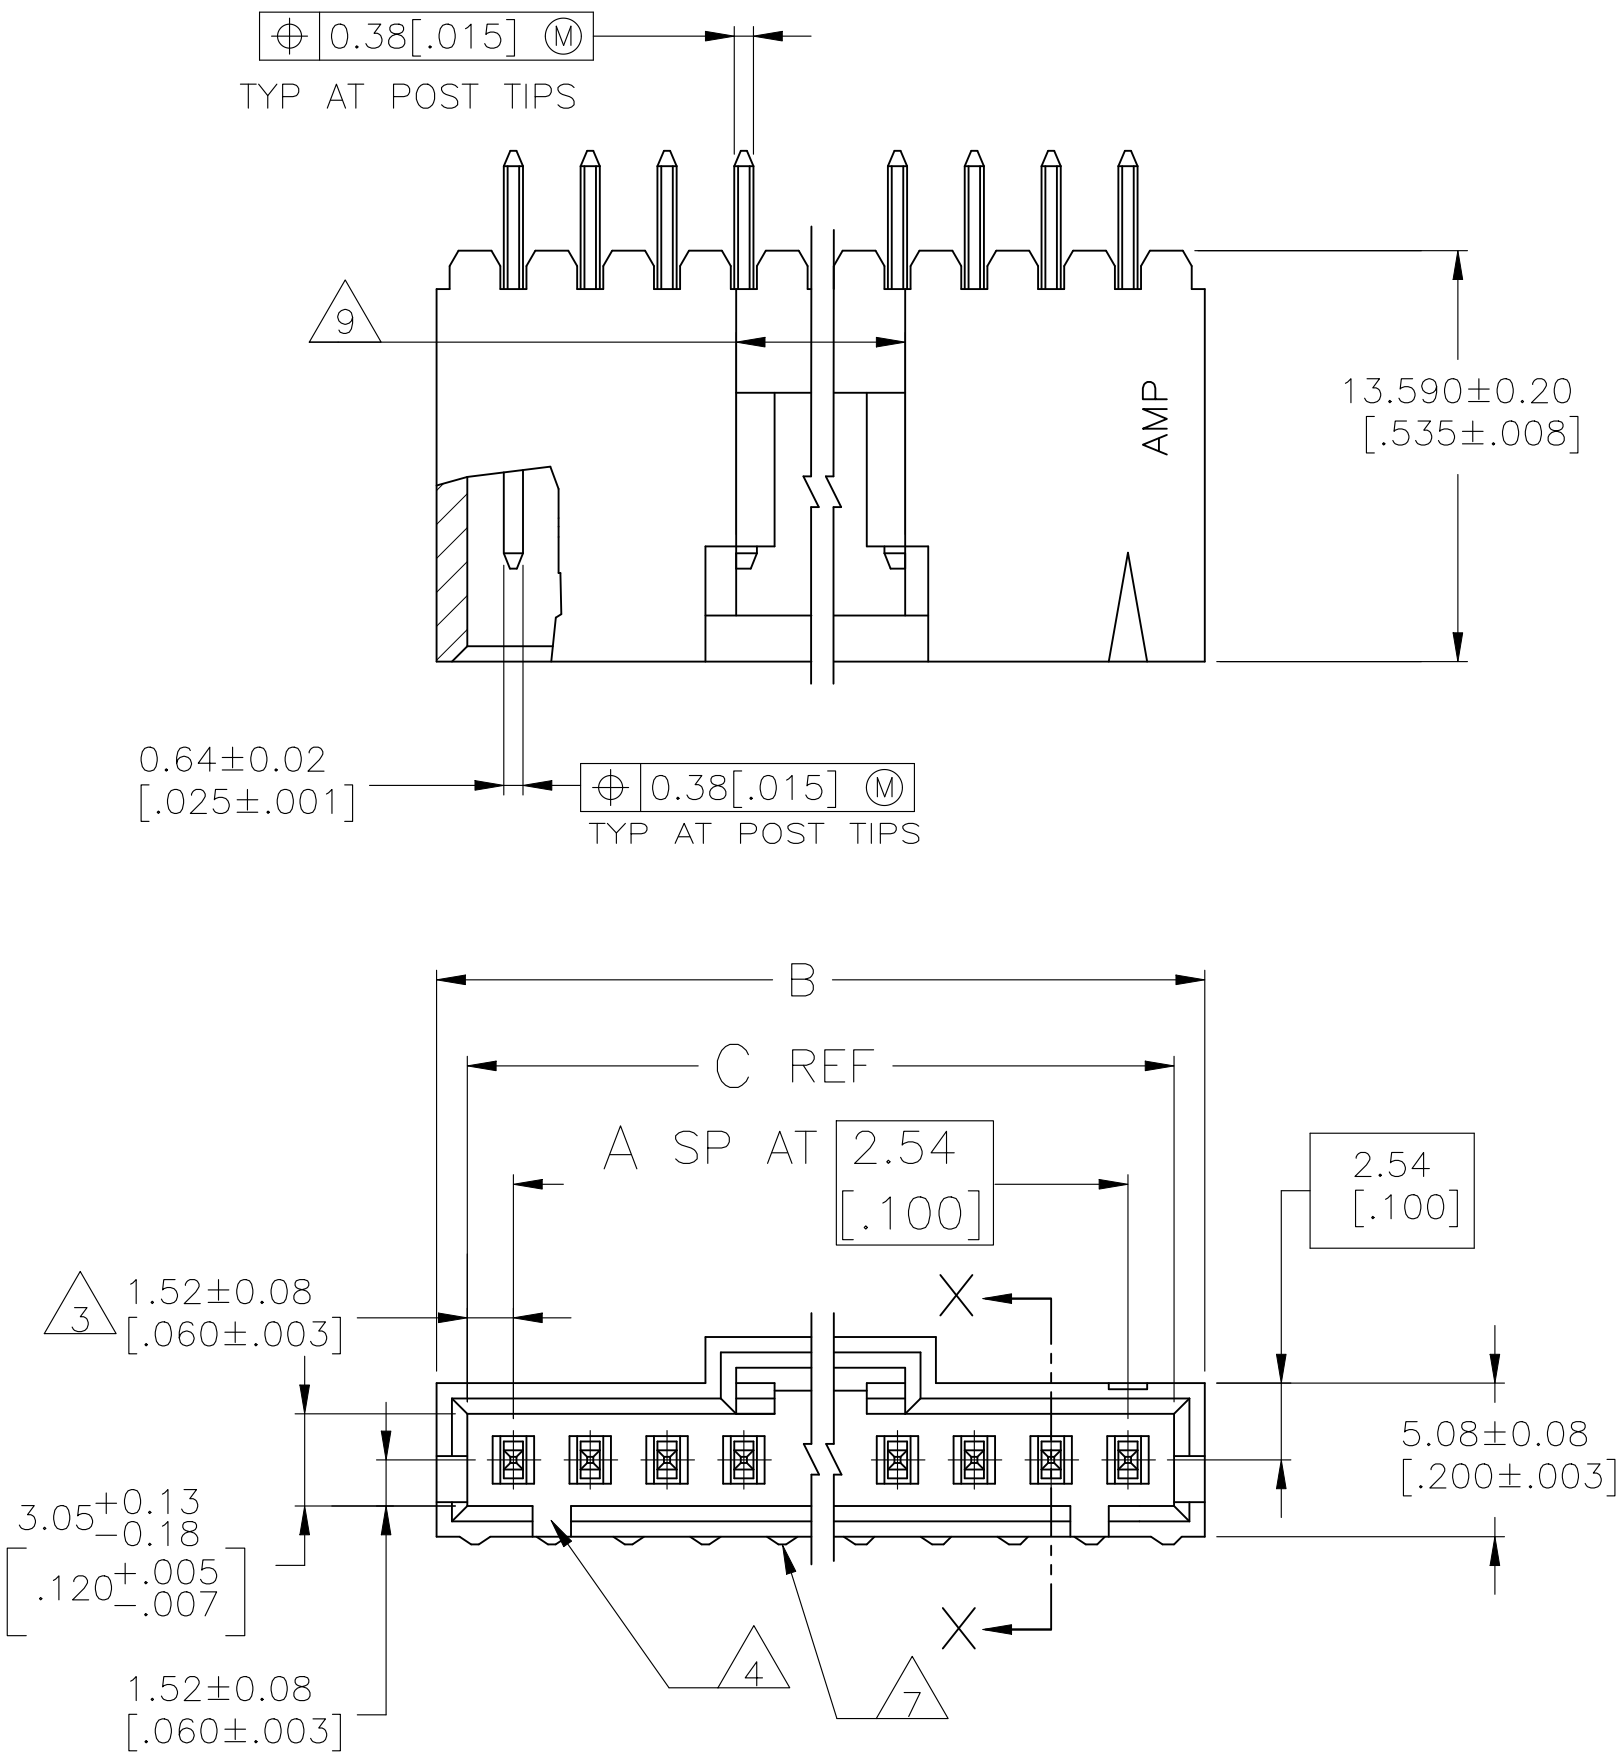

SECTION X-X

OBSOLETE	6	7	5	15.75 [.620]	17.65 [.695]	5	6	5-104904-4
	6	7	5	10.67 [.420]	12.57 [.495]	3	4	5-104904-3
OBSOLETE	6	7	5	8.13 [.320]	10.03 [.395]	2	3	5-104904-2
	6	7	5	5.59 [.220]	7.49 [.295]	1	2	5-104904-1
OBSOLETE	6	1	1	15.75 [.620]	17.65 [.695]	5	6	104904-4
	6	1	1	10.67 [.420]	12.57 [.495]	3	4	104904-3
	6	1	1	8.13 [.320]	10.03 [.395]	2	3	104904-2
	6	1	1	5.59 [.220]	7.49 [.295]	1	2	104904-1
REMARKS		PLATING		C	B	A	NO. OF POSN	PART NO.

RECOMMENDED HOLE LAYOUT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.HERRINGTON 12-10-93	TE Connectivity					
DIMENSIONS: mm [INCHES]		CHK J.GESFORD 12-10-93						
		APVD J.GESFORD 12-10-93	NAME HDR ASSY,VERT,SINGLE ROW 2.54[.100]CL,0.64[.025]SQPOST. WITH PLZN&LATCHING, AMPMODU MTE					
		PRODUCT SPEC 108-25034						
MATERIAL HOUSING:FLAME RETARDANT LCP COLOR - BLACK CONTACTS: BRASS		APPLICATION SPEC 114-25026	SIZE A2	CAGE CODE 00779	DRAWING NO C=104904	RESTRICTED TO -		
SEE TABLE		WEIGHT	CUSTOMER DRAWING			SCALE 4:1	SHEET 1 OF 1	REV L1