




Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings

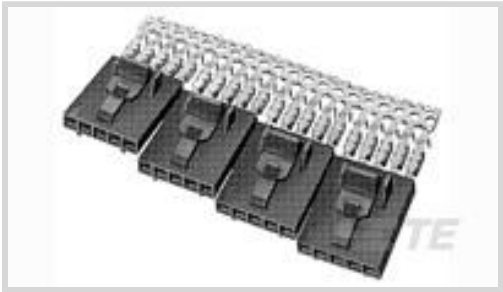

Connector Product Type: **Connector Assembly**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Board**

Number of Positions: **4**

Centerline (Pitch): **2.54 mm [.1 in]**

Features

Product Type Features

Connector Product Type	Connector Assembly
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Applied Pressure	Standard

Configuration Features

Number of Positions	4
Number of Rows	1

Housing Features

Centerline (Pitch)	2.54 mm[.1 in]
Housing Material	Thermoplastic

Termination Features

Termination Method to Wire & Cable	Crimp, Insulation Displacement (IDC)
------------------------------------	--------------------------------------

Body Features

Primary Product Color	Black
-----------------------	-------

Mechanical Attachment

Mating Retention	With
------------------	------



Connector Mounting Type	Cable Mount (Free-Hanging)
Strain Relief	Without
Panel Mount Feature	Without
Mating Retention Type	Latch
PCB Mount Retention	Without
Contact Retention Type Within Housing	Locking Lance

Contact Features

Contact Current Rating (Max)	3 A
Contact Retention Within Housing	With
PCB Contact Termination Area Plating Material Finish	Bright
Contact Layout	Inline
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin-Lead
Contact Type	Socket

Operation/Application

Circuit Application	Signal
---------------------	--------

Usage Conditions

Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
-----------------------------	----------------------------

Other

EU RoHS Compliance	Not Compliant
EU ELV Compliance	Compliant with Exemptions

Electrical Characteristics

Termination Resistance	15 mΩ
Insulation Resistance	5000 MΩ
Operating Voltage	267 V
Dielectric Withstanding Voltage (Max)	600 VAC

Dimensions

Compatible Insulation Diameter Range	1.37 mm[.054 in]
Connector Height	6.73 mm[.265 in]
Wire Size	26 – 22 AWG
Connector Length	50.55 mm[1.99 in]

Industry Standards



UL Flammability Rating	UL 94V-0
Compatible With Approved Standards Products	UL E28476, CSA LR7189
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity	55
Packaging Method	Tube

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) SVHC > Threshold: Pb (13% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # 58074-1
MTA 50/100/156 MANUAL TOOL
FRAME




TE Part # 843477-1
TOOL, EXTRACTION RESET

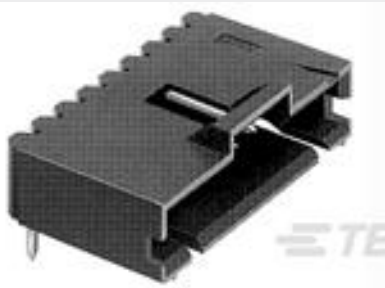

TE Part # 103635-3
04 MTE HDR SRRA LATCH .100CL

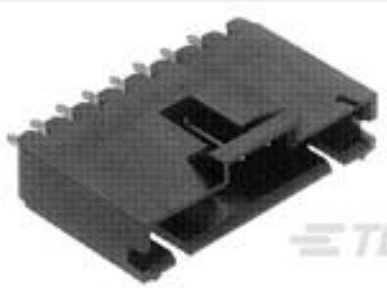


TE Part # 103670-3
04 MTE HDR SRST LATCH W/HLDWN

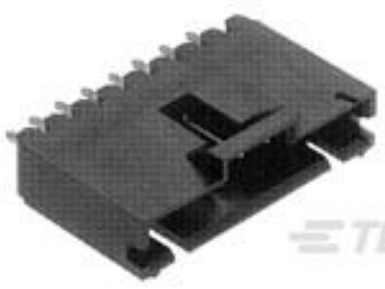

TE Part # 103638-3
04 MTE HDR SRST LATCH .100CL



TE Part # 103673-3
04 MTE HDR SRRA LATCH W/HLDWN

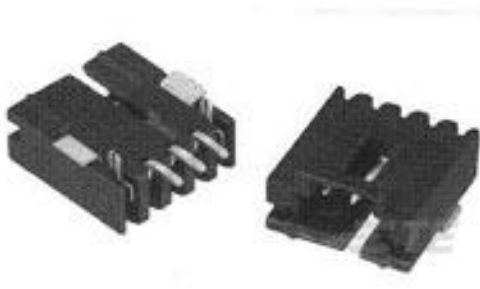

TE Part # 147278-3
04 MTE HDR SRRA SFMNT .100CL



TE Part # 58336-1
HEAD (IDC) MODU MTE W/O TL



TE Part # 104809-3
04 MTE HDR SRST LATCH W/HLDWN



TE Part # 104361-3
04 MTE HDR SRRA LATCH W/HLDWN



TE Part # 104363-3
04 MTE HDR SRST LATCH .100CL


Also in the Series | AMPMODU MTE



Connector Caps & Covers(18)




Connector Contacts(27)

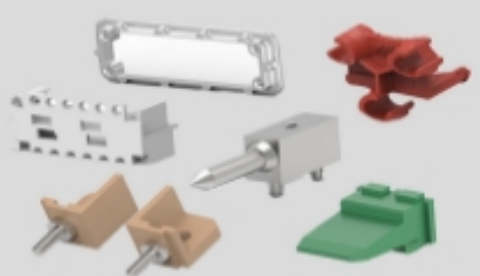


Connector Hardware(1)



Insertion & Extraction Tools(1)

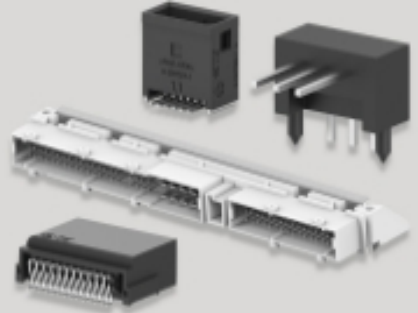

PCB Headers & Receptacles(444)

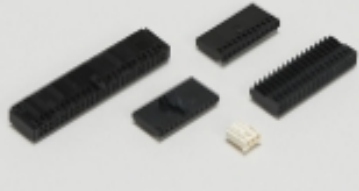

Wire-to-Board Connector Assemblies
& Housings(298)


Customers Also Bought




TE Part #D369-R33-NS1
369 3 WAY REC, CRIMP, SKT




TE Part #6609038-1
20VP1=F7774 S0

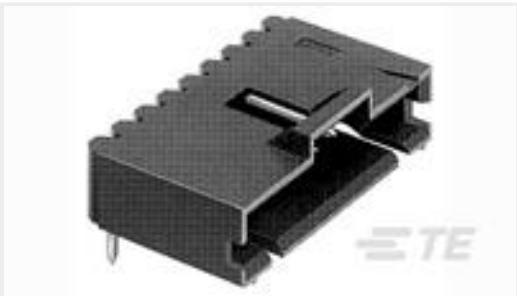

TE Part #103635-3
04 MTE HDR SRRA LATCH .100CL

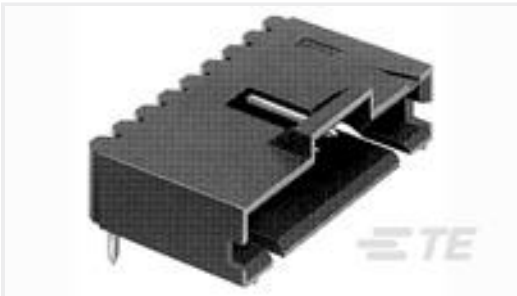

TE Part #6-103634-3
14 MTE HDR SRRA LTCH.100CL LF

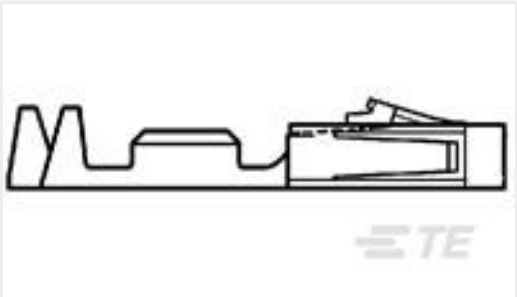


TE Part #1-104479-1
SHORT POINT RECP CONT LP



TE Part #322693
TERMINAL,SOLIS R HR 16-14 6



TE Part #5-103957-3
5X4 MTE RCPT SR LATCH .100CL



TE Part #WM10BF06-09SN-990A
RECEPT.ASSY. SQ FL WM SIZE 6 9
WAY 990A

Documents

Product Drawings

5X4 MTE RCPT SR LATCH .100CL

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_103957-3_N.2d_dxf.zip

English

Customer View Model

ENG_CVM_103957-3_N.3d_igs.zip

English

Customer View Model

ENG_CVM_103957-3_N.3d_stp.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_103957-3_P.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_103957-3_P.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_103957-3_P.3d_stp.zip

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages
AMPMODU MTE INTERCONNECT SYSTEM
English

Product Specifications
Application Specification
English

Instruction Sheets
Instruction Sheet (U.S.)
English