




Terminals & Splices > Quick Disconnects

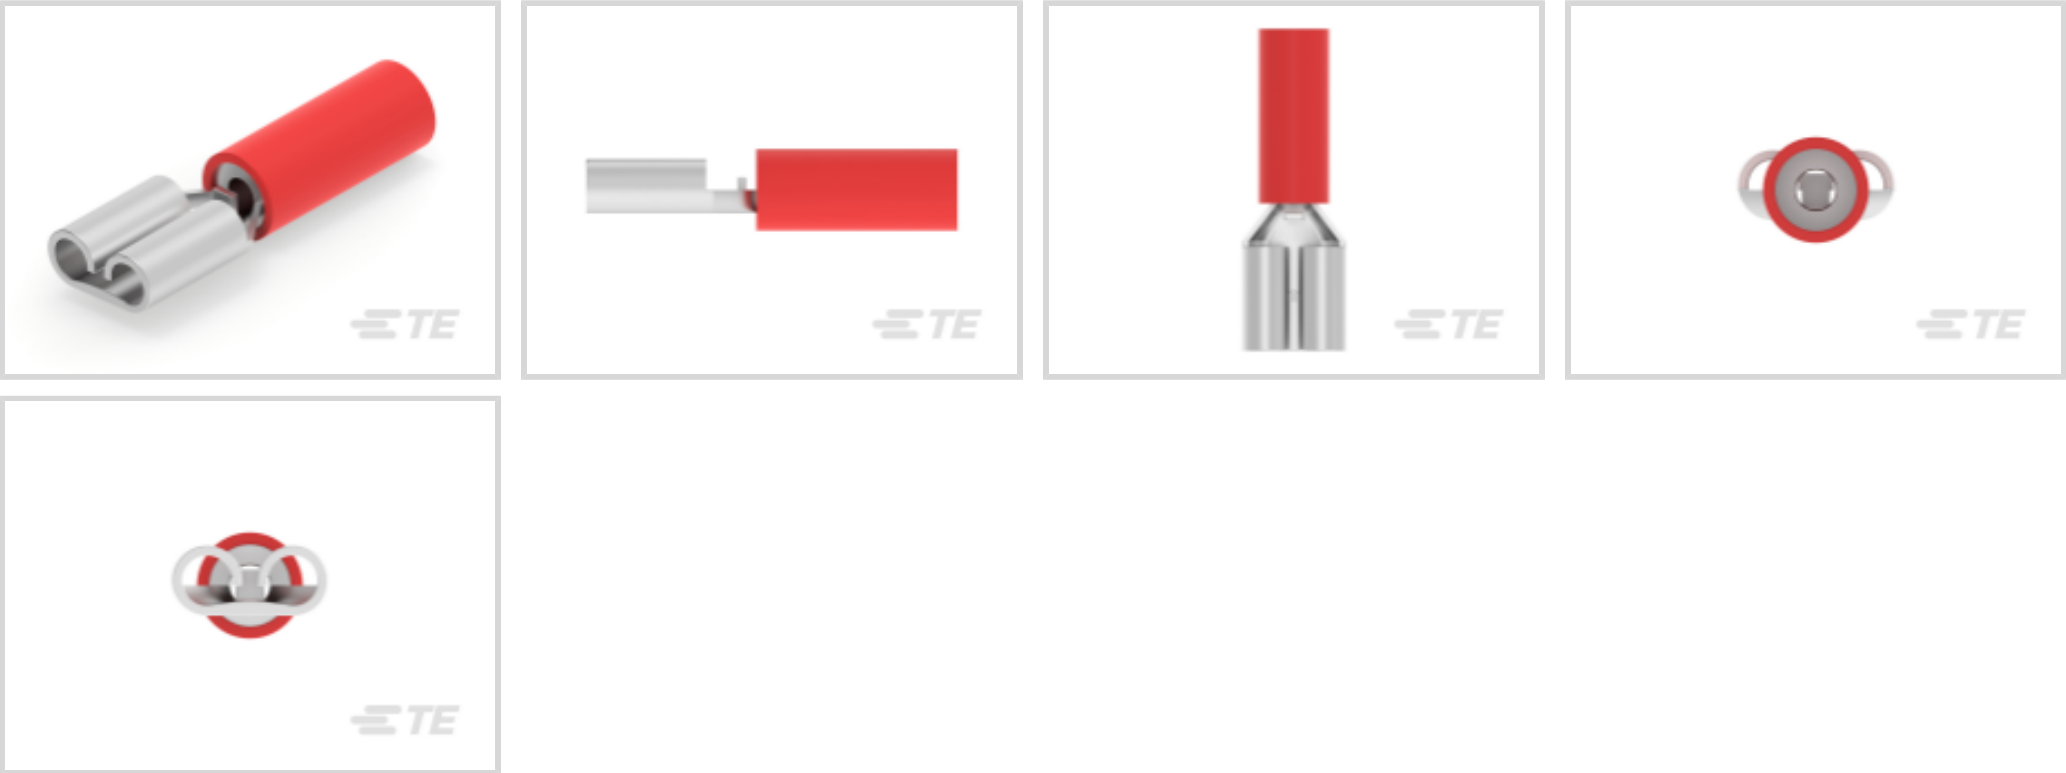

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **509 – 1900 CMA**

Mating Tab Width: **5.21 mm [.205 in]**

Features

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	5.21 mm[.205 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	Compression
Barrel Type	Closed

Dimensions

Wire Size	509 – 1900 CMA
Product Length	20.36 mm[.8 in]
Compatible Insulation Diameter Range	3.43 mm[.135 in]
Terminal Material Thickness	.41 mm[.016 in]

Packaging Features

Packaging Method	Loose Piece
Packaging Quantity	100



Product Type Features

Insertion Force	Normal
Terminal Features	Wire Stop

Usage Conditions

Insulation Option	Partially Insulated
Operating Temperature Range	105 °C[221 °F]

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant
Barrel Color	Red

Electrical Characteristics

Voltage Rating	300 V
----------------	-------

Body Features

Insulation Material	Nylon
---------------------	-------

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Industry Standards

Compatible With Agency/Standards Products	RU (UL Component Program), CSA
---	--------------------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC



Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # 59824-1
TETRA-CRIMP PIDG PG FASTON 22-10 ASSY



TE Part # 58433-3
PRO CR ASSY, RBY IS9252

Also in the Series | FASTON 205

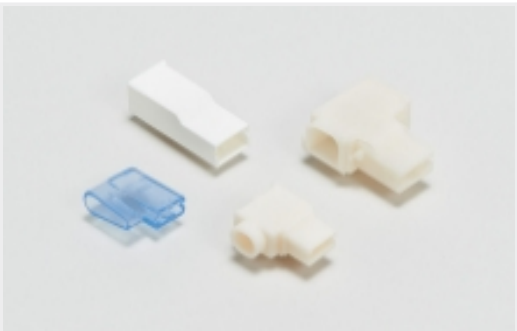

Crimp Terminal Housings(3)



PCB Terminals(10)



Quick Disconnects(35)

Customers Also Bought



TE Part #640917-1
PIDG FASTON Receptacle Quick Disconnects



TE Part #1-6609006-8
15EJS1=F8033



TE Part #211398-1
CPC RECPT. SIZE 13-7



TE Part #350416-5
.093 COMM P&S PIN AU/NI/BR






TE Part #2414-002-1886
[LOCKWASHER, SIZE 18, HDP](#)



TE Part #6609017-5
[3EC1=F7282 S0](#)

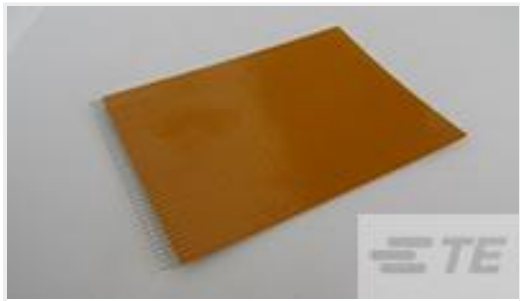

TE Part #5-1437186-0
[FST-21A-5](#)

TE Part #11190611-00
[10000 PSI, SAE 4 FEMALE, 1-6V, PACKARD M](#)

TE Part #11190501-00
[1500 PSI, 3/8-24UNF MALE, 1-6V, PACKARD,](#)

Documents

Product Drawings

[RECEPT,PIDG FASTON 22-18 205](#)

English

CAD Files

[3D PDF](#)

English

Customer View Model

[ENG_CVM_8-640911-1_F.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_8-640911-1_F.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_8-640911-1_F.3d_stp.zip](#)

English

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_8-640911-1_E.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_8-640911-1_E.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_8-640911-1_E.3d_stp.zip](#)

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Agency Approvals

CSA Certificate

English