




Connectors > Contacts > Connector Contacts

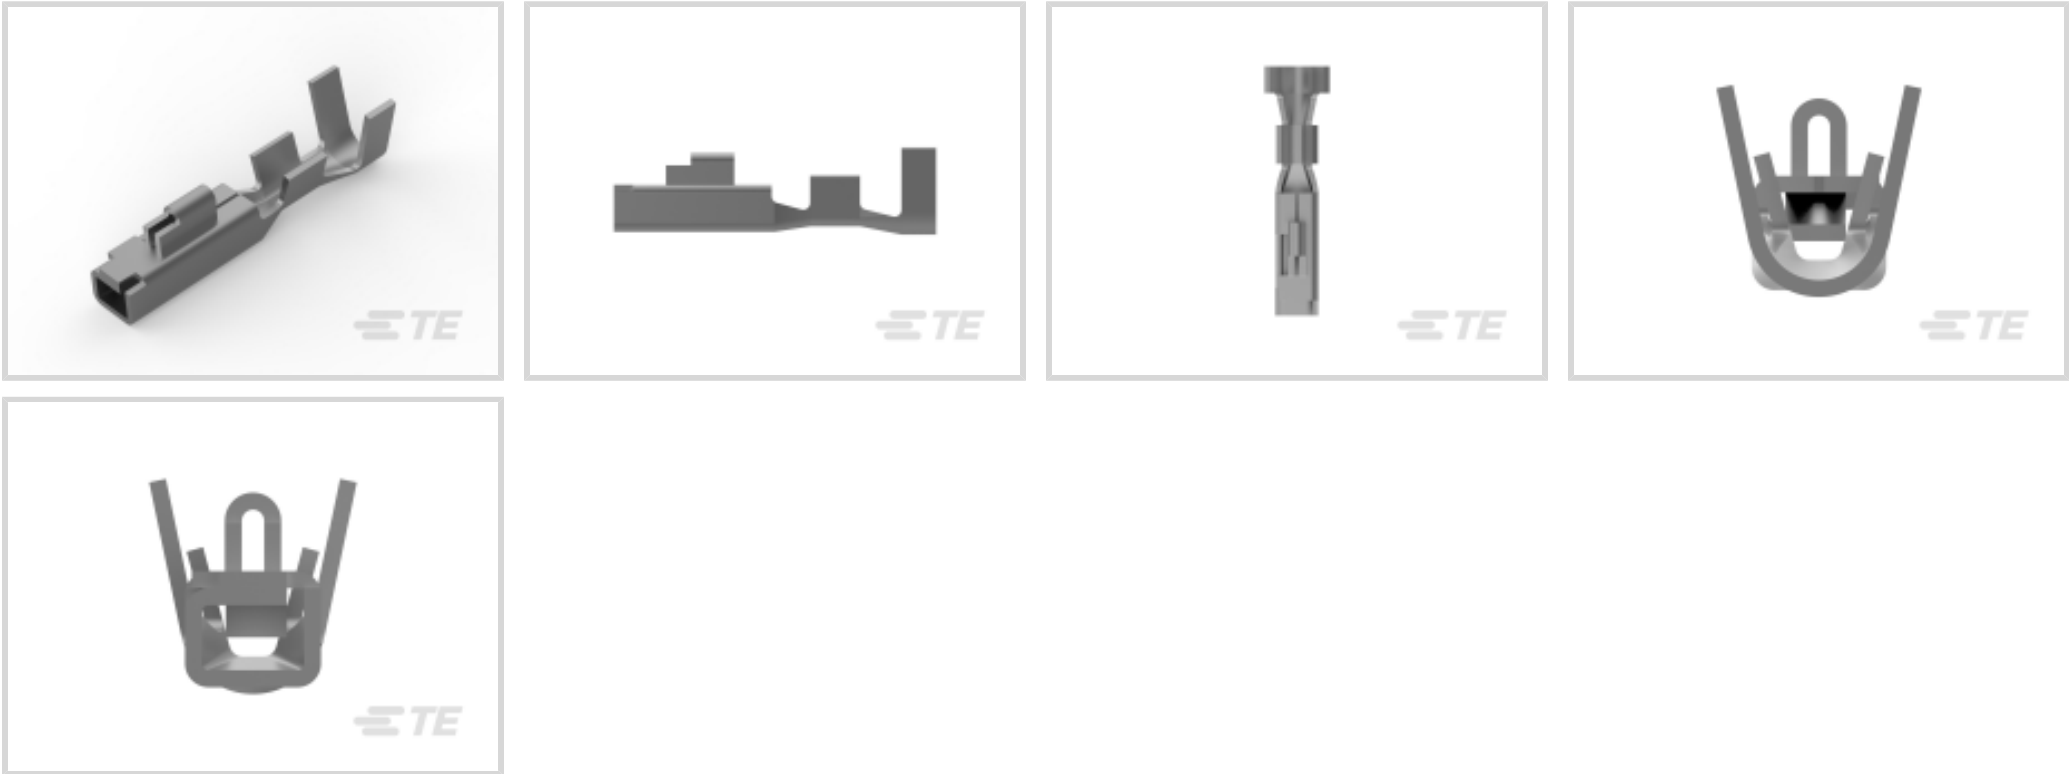

Contact Type: **Receptacle**
Contact Mating Area Plating Material: **Tin**
Wire Contact Termination Area Plating Material: **Pre-Tin**
Operating Voltage: **50 VAC, 300 VAC**
Contact Retention Within Housing: **With**

Features

Mechanical Attachment

Wire Insulation Support	With
-------------------------	------

Packaging Features

Packaging Method	Reel
Packaging Quantity	5000

Dimensions

Compatible Insulation Diameter Range	1.2 – 2 mm[.047 – .079 in]
Wire Size	.12 – .35 mm²

Contact Features

Contact Orientation	Straight
Mating Tab Thickness	.64 mm[.025 in]
Wire Contact Termination Area Plating Thickness	.8 µm[31.49 µin]
Contact Mating Area Plating Material Thickness	.8 µm[31.49 µin]
Wire Contact Termination Area Plating Material Finish	Matte
Mating Tab Width	1.2 mm[.047 in]



Contact Type	Receptacle
Contact Mating Area Plating Material	Tin
Wire Contact Termination Area Plating Material	Pre-Tin
Contact Retention Within Housing	With
Contact Base Material	Brass
Contact Current Rating (Max)	12 A

Electrical Characteristics

Operating Voltage	50 VAC, 300 VAC
-------------------	-----------------

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products



will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 176280-1 UNIV POWER PLUG HSG 18P F/H	 TE Part # 176280-9 UNIV POWER PLUG HSG 18P F/H	 TE Part # 176275-1 UNIV POWER PLUG HSG 8P F/H	 TE Part # 176276-1 AMP UNIVERSAL POWER PLUG 9P
 TE Part # 176278-9 UNIV POWER PLUG HSG 12P F/H	 TE Part # 178481-1 UP 3.96 4P PLUG HSG NATRL	 TE Part # 178483-1 UP 3.96 6P PLUG HSG NATRL	 TE Part # 178482-1 UP 3.96 5P PLUG HSG NATRL
 TE Part # 178125-1 U/POWER PLUG HSG 2P 7.92M/M	 TE Part # 176273-1 AMP UNIVERSAL POWR PLUG 4P	 TE Part # 176272-1 AMP UNIVERSAL POWER PLUG 3P	 TE Part # 176270-1 UNIV POWER PLUG HSG 1P F/H
 TE Part # 176271-1 AMP UNIVERSAL POWER PLUG 2P	 TE Part # 178125-4 U/POWER PLUG HSG 2P 7.29MM	 TE Part # 176279-1 UNIV POWER PLUG HSG 15P F/H	 TE Part # 176279-9 UNIV POWER PLUG HSG 15P F/H





TE Part # 4-178842-1
AMP U/P SGL ROW PLUG HSG 4P



TE Part # 913923-1
EXTRACTON TOOL FOR 175150



TE Part # 6-178842-1
AMP U/P SGL ROW PLUG HSG 6P



TE Part # 176274-1
AMP UNIVERSAL POWER PLUG 6P


Also in the Series | AMP Universal Power



Connector Contacts(22)



Insertion & Extraction Tools(1)

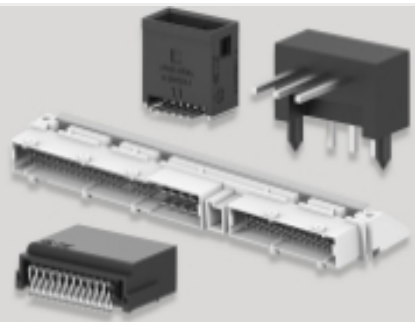


PCB Headers & Receptacles(51)



Rectangular Power Connectors(112)

Customers Also Bought

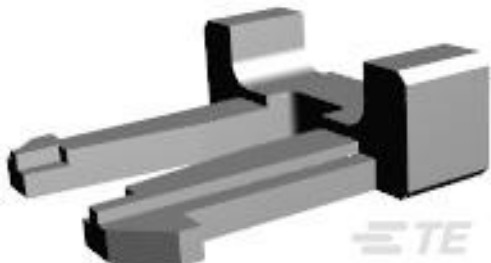

TE Part #917698-1
2.5 SIGNAL DBL LOCK D.L.P 2P



TE Part #176272-1
AMP UNIVERSAL POWER PLUG 3P




TE Part #175149-2
AMP UNIVE. POWER CONN TAB CONT




TE Part #316086-2
2.5 S.D.L CAP HSG 2P RED



TE Part #917686-6
2.5 S.DBL L. PLUG HSG 2P BLUE

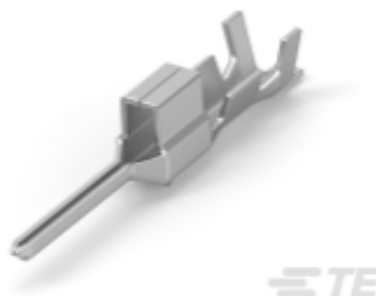

TE Part #2232575-1
2.5 SIGNAL D/LOCK TAB CONT. M



TE Part #2-2292405-0
20P RCPT VAL-U-LOK GW BLUE



TE Part #3-1971882-1
2P HOUSING(HIGH VOLTAGE) MULTI 6P CONNE

Documents

Product Drawings
AMP UNIVE. POWER CONN REC CONT

English

CAD Files
3D PDF

3D



Customer View Model

[ENG_CVM_CVM_175151-2_T.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_175151-2_T.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_175151-2_T.3d_stp.zip](#)

English

3D PDF

English

Customer View Model

[ENG_CVM_175151-2_E.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_175151-2_E.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_175151-2_E.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

APPLICATION SPECIFICATION AMP UNIVERSAL POWER CONTACT, CRIMPING OF

English

Instruction Sheets

Extraction Tool for UP(913923-1)

English

Instruction Sheet (non U.S.)

English

AMP UNIVERSAL POWER CONNECTOR SERIES

English

Instruction Sheet (non U.S.)

English

Hand Tool, PN 914181-1, Universal Power Contact (Was IS-505J)

Japanese

Instruction Sheet (non U.S.)

English

Agency Approvals

TUV Certificate

English

175151-2

Receptacle Contact, Tin, 300 VAC / 50 VAC, 26 – 22 AWG Wire Size, .12 – .35 mm²
Wire Size, Crimp, Brass, Power, AMP Universal Power

