


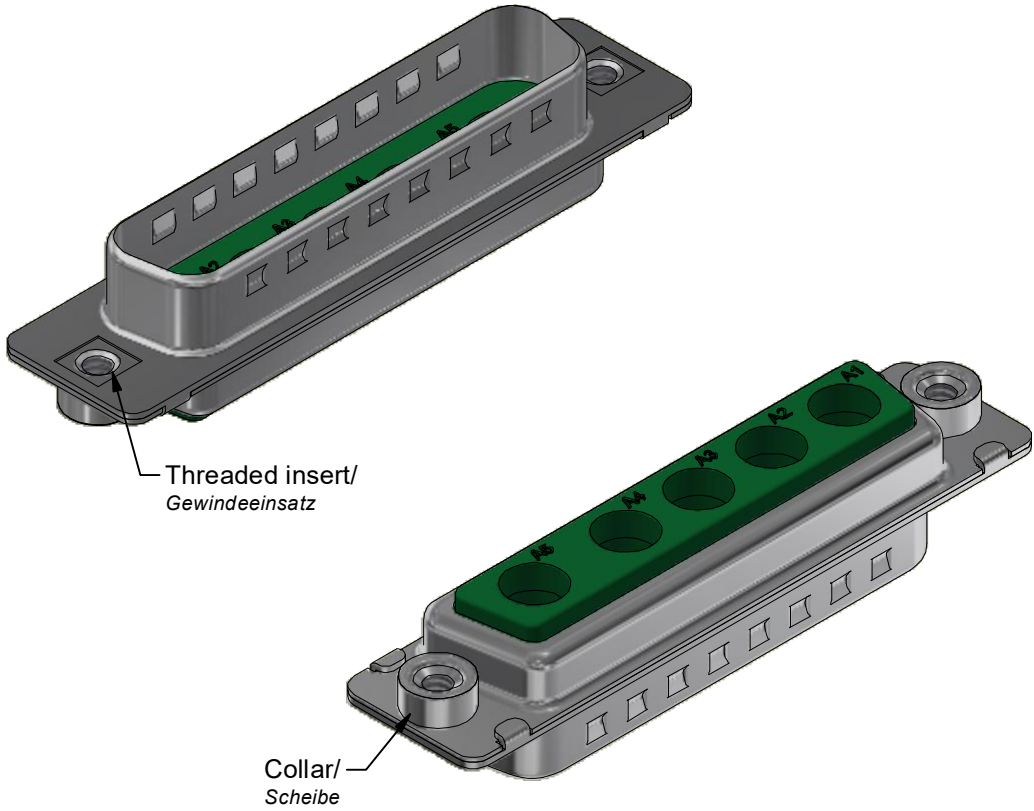

**Technical specification/
Technische Daten:**





Temperature range/ *Temperaturbereich:* - 55 °C ... + 125 °C


**Materials/
Werkstoffe:**

Insulator/ <i>Isolierkörper:</i>	PBT GF UL 94 V-0, green/ <i>grün</i>
Shell/ <i>Gehäuse:</i>	Steel, Sn over Ni
Threaded insert/ <i>Gewindeeinsatz:</i>	Cu alloy, Sn over Ni
Collar/ <i>Scheibe:</i>	Cu alloy, Sn over Ni

**Installation specification/
Montagedaten:**

Recommended torque
value for thread/
*Empfohlenes Drehmoment
für Gewinde:* max. 6 in.LB/*max. 67 Ncm*

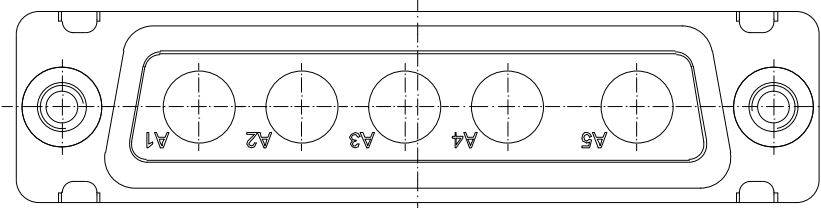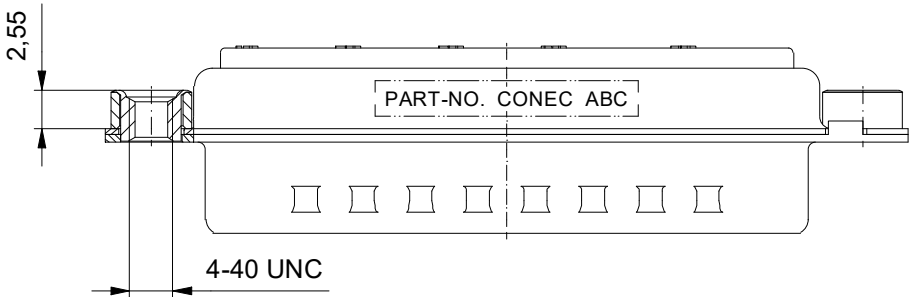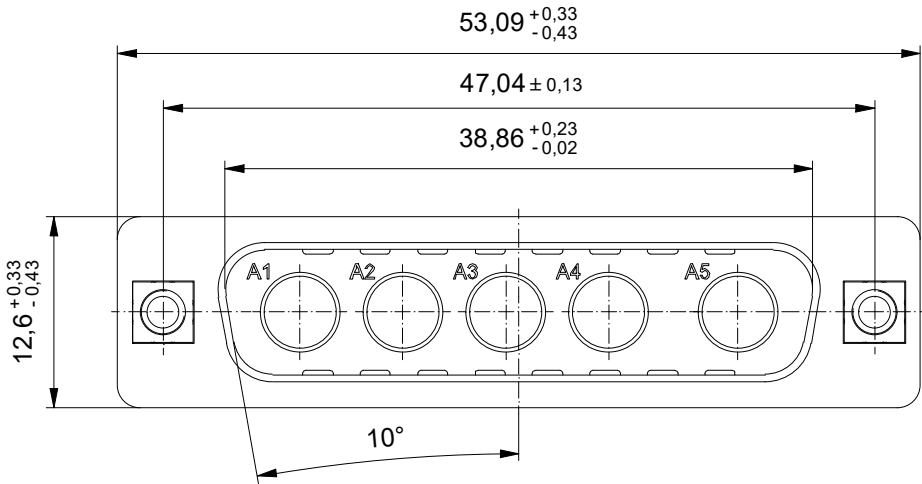

Part no. / Part marked/ <i>Art.-Nr. / Bedruckung:</i>		Contact plating/ <i>Kontakt Veredelung:</i>	
3005W5PXX99A30X		No contact on Pos. A1 - A5/ <i>Kein Kontakt auf Pos. A1 - A5</i>	
general tolerance/ <i>Allgemeintoleranz:</i>		 dim. in mm	
0 ± 0,50 mm 0,0 ± 0,25 mm 0,00 ± 0,10 mm * ± 5°		Date/ <i>Datum</i> Name drawn/ <i>gez.</i> 05.10.2000 Parei appd./ <i>gepr.</i> 05.10.2000 Schrader	
Index: a		scale/ <i>Maßstab:</i> 2:1	
		dwg no / <i>Z.-nr.:</i> 13K1A093A	
		DIN-A3 1 / 1	