



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**
Wire Size: **2048 – 3256 CMA**
Mating Tab Width: **2.8 mm [.11 in]**

Features

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	2.8 mm[.11 in]
Mating Tab Thickness	.8 mm[.009 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Dimensions

Wire Size	2048 – 3256 CMA
Product Length	15 mm[.59 in]
Compatible Insulation Diameter Range	2.2 – 2.7 mm[.088 – .106 in]
Terminal Material Thickness	.25 mm[.01 in]

Packaging Features

Packaging Method	Reel
Packaging Quantity	15000



Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 130 °C[-40 – 266 °F]

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>




Also in the Series | FASTIN-FASTON 110



Automotive Housings(6)

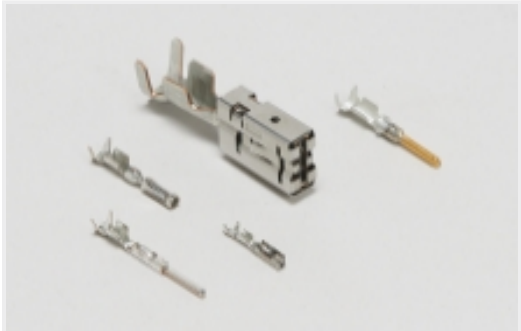

Automotive Terminals(5)

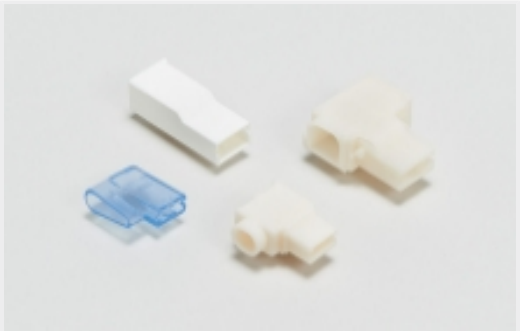

Crimp Terminal Housings(34)




Insertion & Extraction Tools(3)




Quick Disconnects(83)


Customers Also Bought

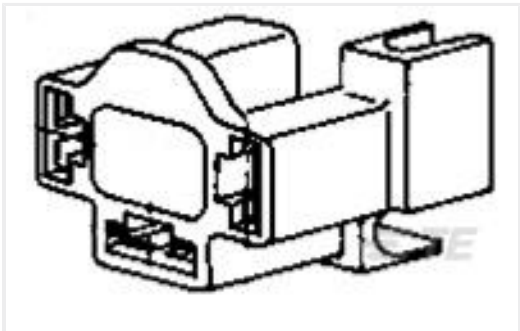


TE Part #626213-1
FASTIN-ON 0.312 FLAG REC NYLON 6.6

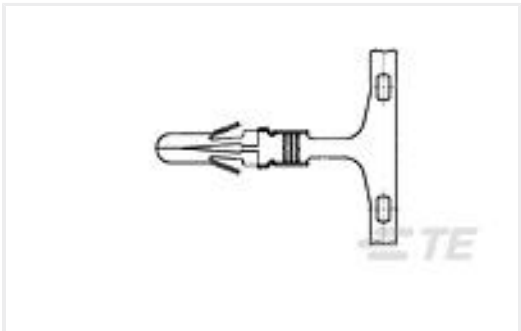

TE Part #880685-2
.140 DIA PIN

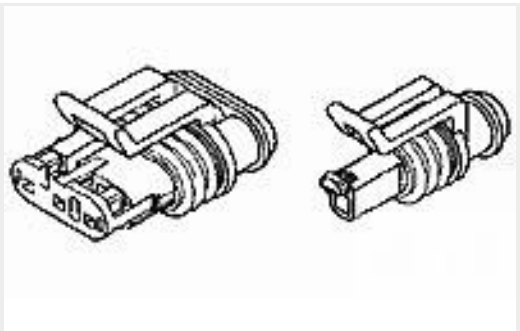

TE Part #282090-1
AMP SUPERSEAL 1.5 SERIES 6P PL

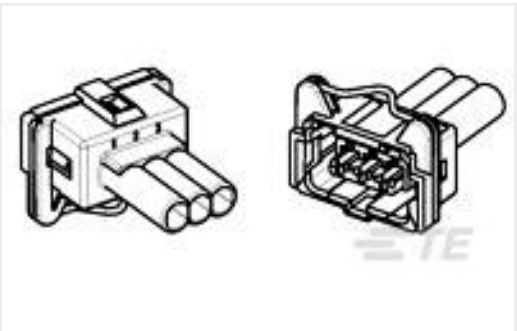

TE Part #444075-1
ASS'Y 2P SP/TIMER



TE Part #8-968971-2
AMP Unsealed Connector Housing



TE Part #1-962842-1
TAB 2.8x0.8 CONTACT CS SRC Sn



TE Part #880636-2
FF 250 TAB 1.0-2.5 MM2 0.39 X 13.2 TPBR



TE Part #735222-2
FF 250 REC 1.0-2.5 MM2 0.32X 19.30 BR



TE Part #7-1414778-3
V23130C2421A431-EV-CBOX



Documents

Product Drawings

FF 110 REC 1.0-1.5 MM2 0.25X12.32 PTPBR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_880635-5_G2.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_880635-5_G2.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_880635-5_G2.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English