



2x1 2.0 USB Receptacle

AUSB2-4599



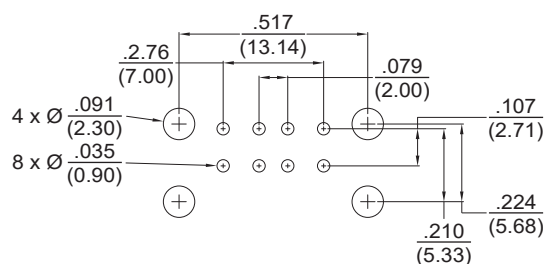
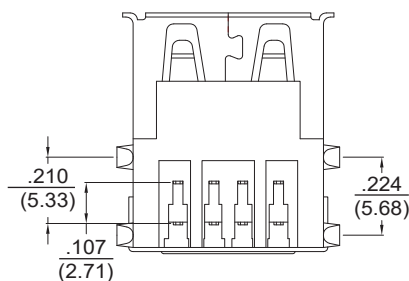
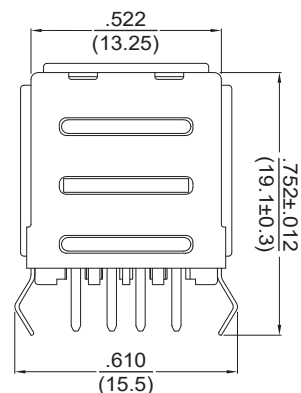
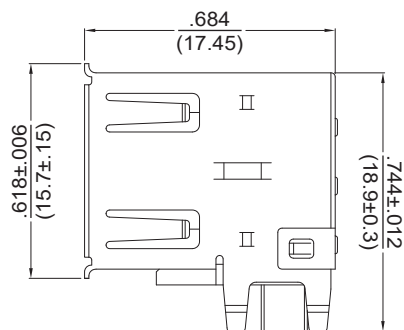
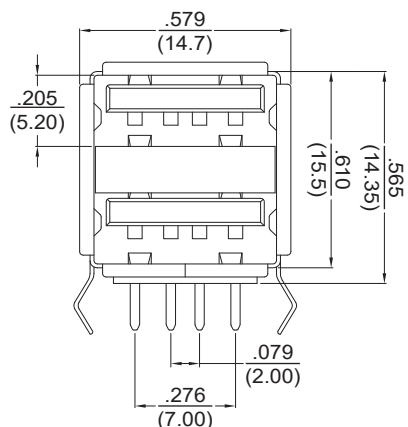
- Dual Port 2.0 USB Receptacle
- Industrial Operating Temp. Range: -55°C to +85°C

Electrical Specifications @ 25°C

Voltage Current Rating @1.5A	Insulation Resistance (MΩ) Max	Contact Resistance (mΩ)	Dielectric Withstanding Voltage
30VAC	1000	30	500VAC

All specifications subject to change without notice.

MECHANICAL

Dimensions: $\frac{\text{inch}}{(\text{mm})}$ Recommended
Land Pattern

NOTES

1. Housing: PBT
2. Contact: C2680
3. Shell: SPCC