




Terminals & Splices > Quick Disconnects

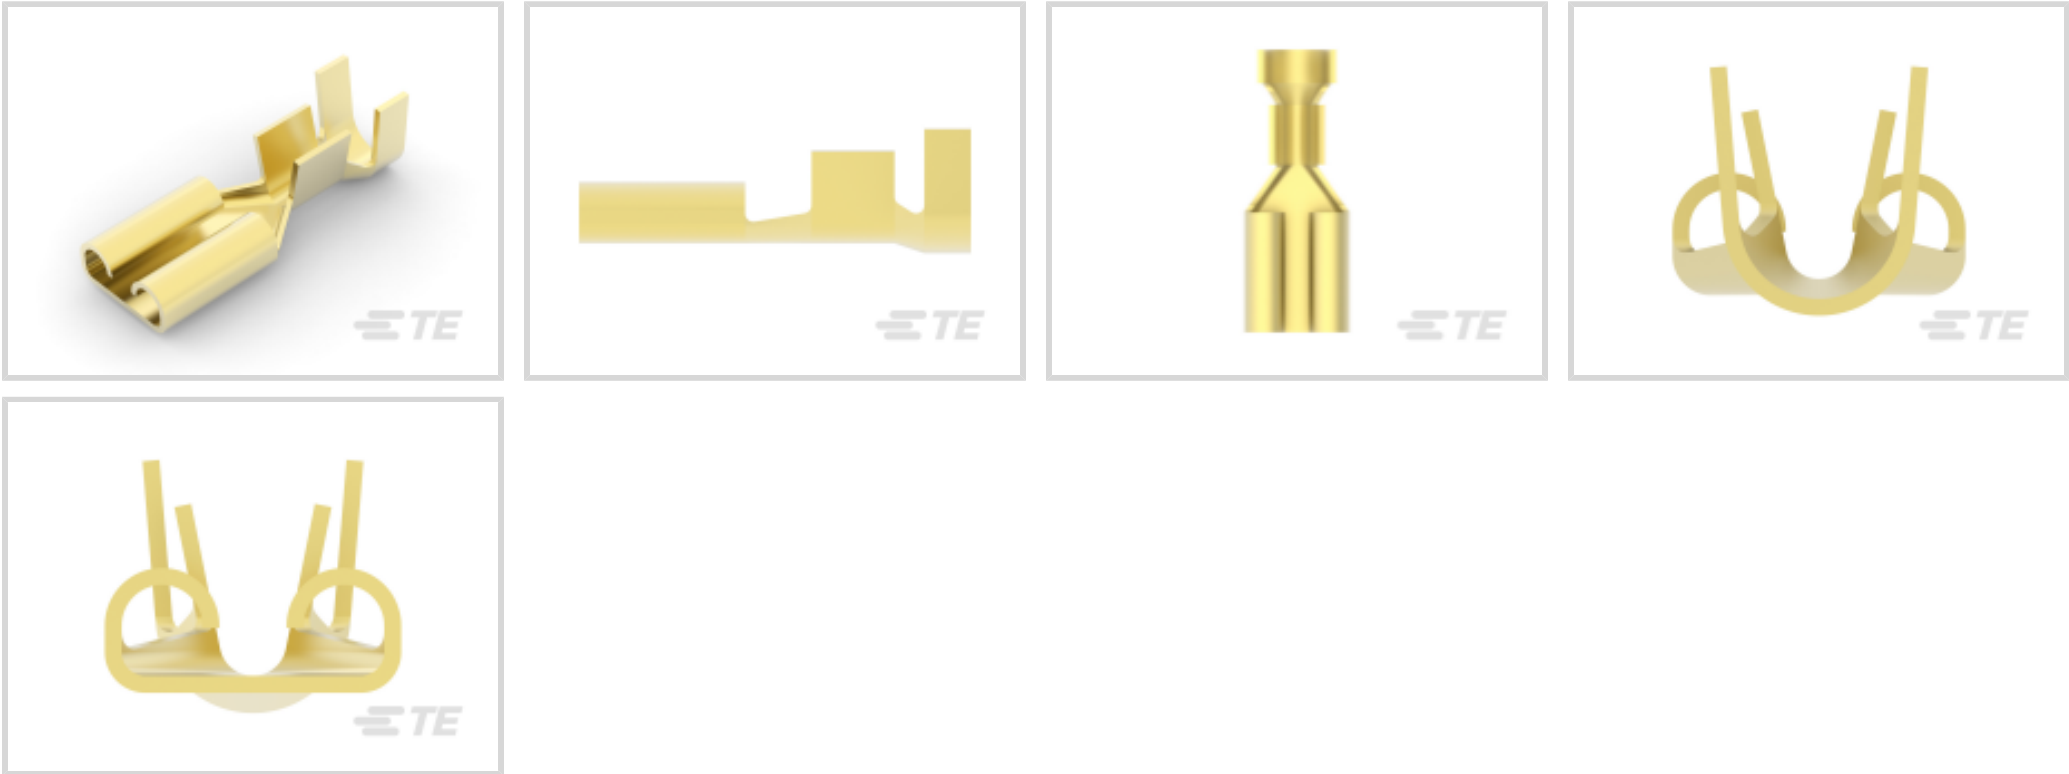

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **.51 – 1.31 mm²**

Mating Tab Width: **4.75 mm [.187 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	4.75 mm[.187 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Unplated
Crimp Type	F-Crimp
Barrel Type	Open

Dimensions

Wire Size	.51 – 1.31 mm²
Compatible Insulation Diameter Range	2.29 – 3.3 mm[.09 – .13 in]
Terminal Material Thickness	.3 mm[.012 in]

Packaging Features

Packaging Method	Strip/Reel
Packaging Quantity	16000



Product Type Features

Insertion Force	Low
-----------------	-----

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single

Termination Features

Product Terminates To	Wire & Cable
-----------------------	--------------

Mechanical Attachment

Wire Insulation Support	With
Mating Retention Type	Dimple

Industry Standards

Compatible With Agency/Standards Products	UL, CSA
---	---------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2150007-1
OCEAN_2.0_Applicator-E-090F140F-REM

TE Part # 755336-1
DAHT FASTON 22-14 ASSY

TE Part # 2150007-2
OCEAN_2.0_Applicator-E-090F140F-REA

TE Part # 7-2150007-7
OCEAN_2.0_SPARE_PART_KIT-090F140F

Also in the Series | FASTON 187

Crimp Terminal Housings(41)

Insertion & Extraction Tools(1)

Joints & Splices(1)

PCB Terminals(42)

Quick Disconnects(207)

Splices(1)

Customers Also Bought



TE Part #2-323758-1
PIDG R 22-16 COMM 22-18 MIL 4




TE Part #2-32561-1
PIDG SPDFLG 22-16COMM22-18MIL6



TE Part #91595-1
CCII D-2 M REC TAB 22-18 ASSY



TE Part #5-104074-3
15 SYSTEM 50 HDR SRRA SHRD SN

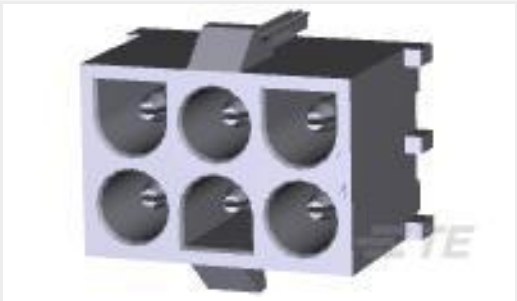

TE Part #641970-1
06P UMNL PIN HDR ASSY 94VO



TE Part #53244-2
TERMINAL,PG SPR SPD 16-14 8



TE Part #CONMCX012
MCX Plug 50 Ohm Cable Crimp



TE Part #CONSMA012
SMA RA Plug 50 Ohm Cable Crimp



TE Part #6609037-1
3EP1=F7169 S0



TE Part #1483358-3
MICRO-MATCH LEAD 20P 250MM

Documents

Product Drawings

187 FASTON REC 20-16 AWG BR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_63654-1_S_c-63654-1-s.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_63654-1_S_c-63654-1-s.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_63654-1_S_c-63654-1-s.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications



Application Specification

English

Agency Approvals

UL Report

English