

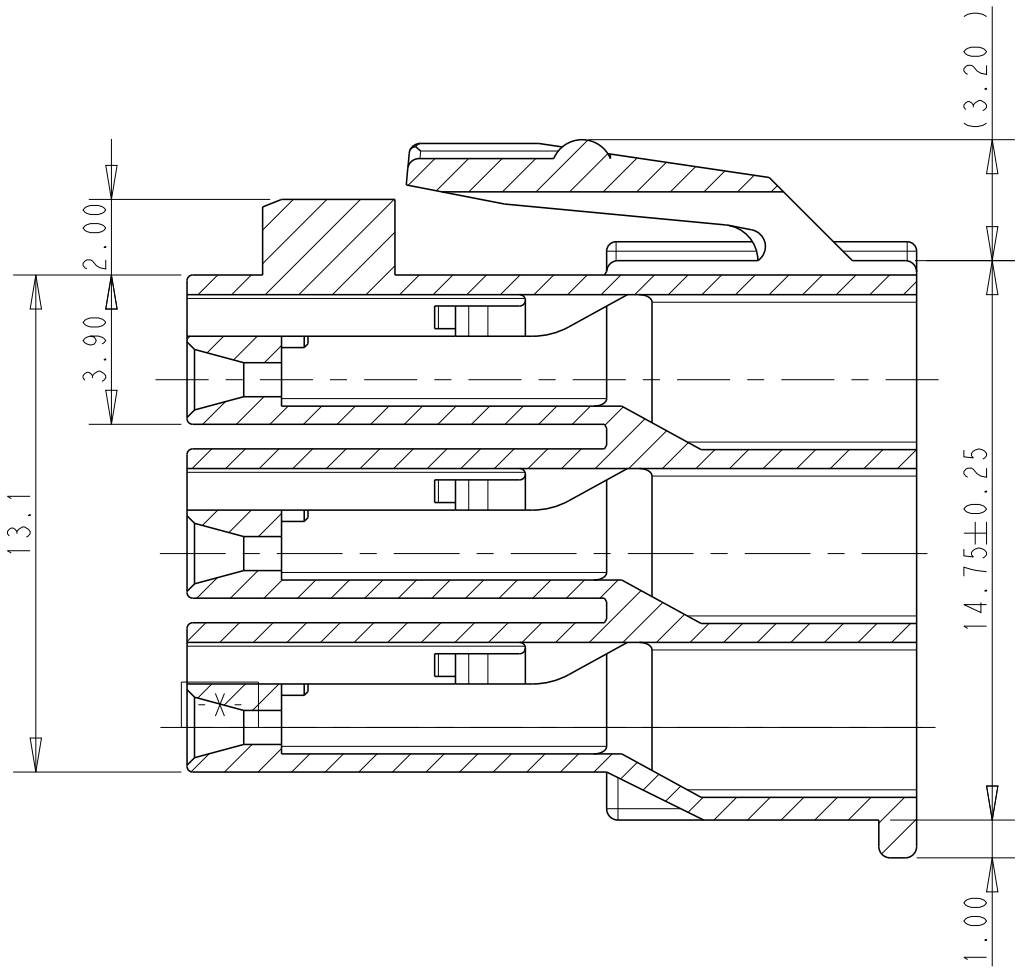
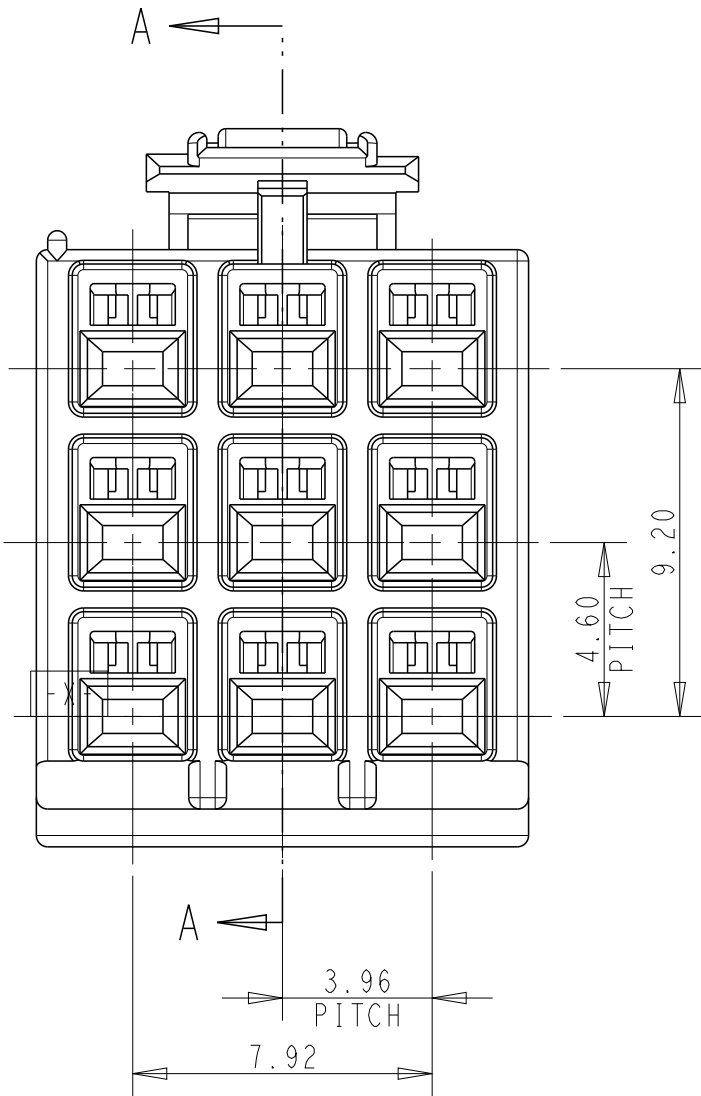


P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECR-20-100642	19SEP2022	M.G	D.Z

- 1 APPLICABLE CONTACT P/N:
REC CONTACT: 175152- (20-16 AWG)
175151- (26-22 AWG)
- 2 MATING CONN.P/N:
CAP HSG: 176287- (FREE HANGING)
176297- (PANEL MOUNT)
TAB CONTACT: 175150- (20-16 AWG)
175149- (26-22 AWG)
- 3 INSTRUCTION SHEET: IS-503J.

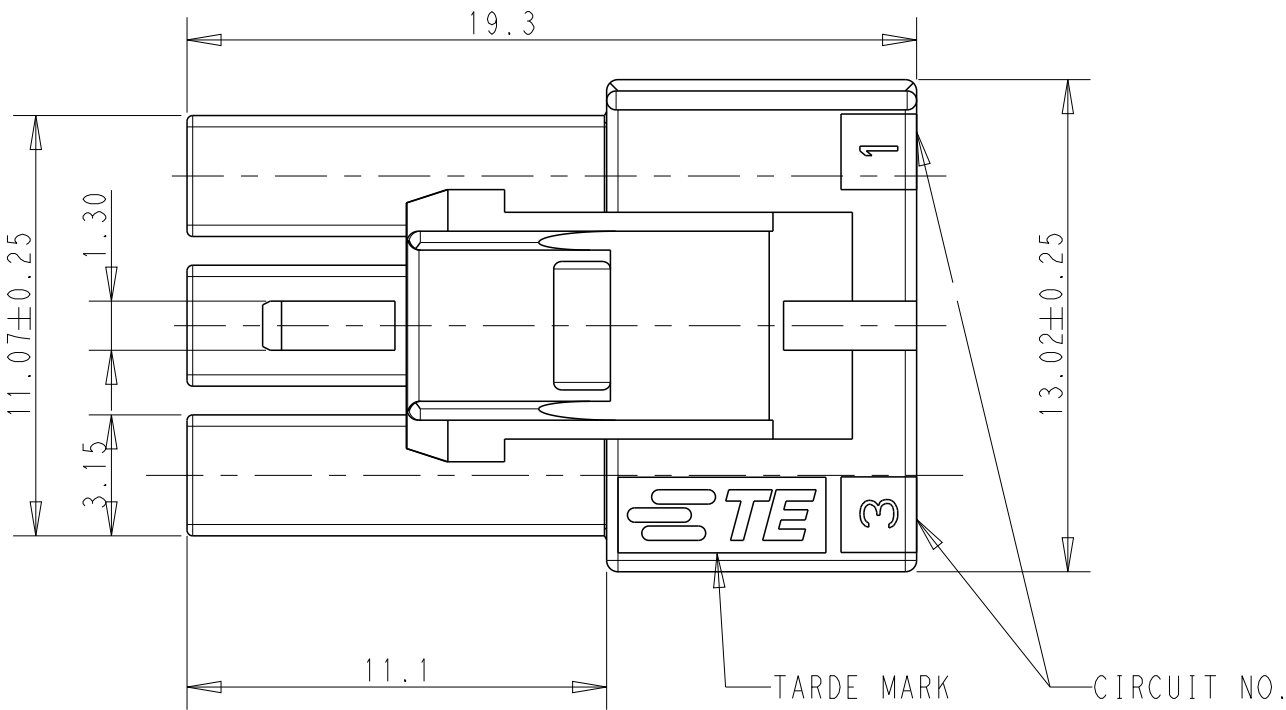

SECTION A-A

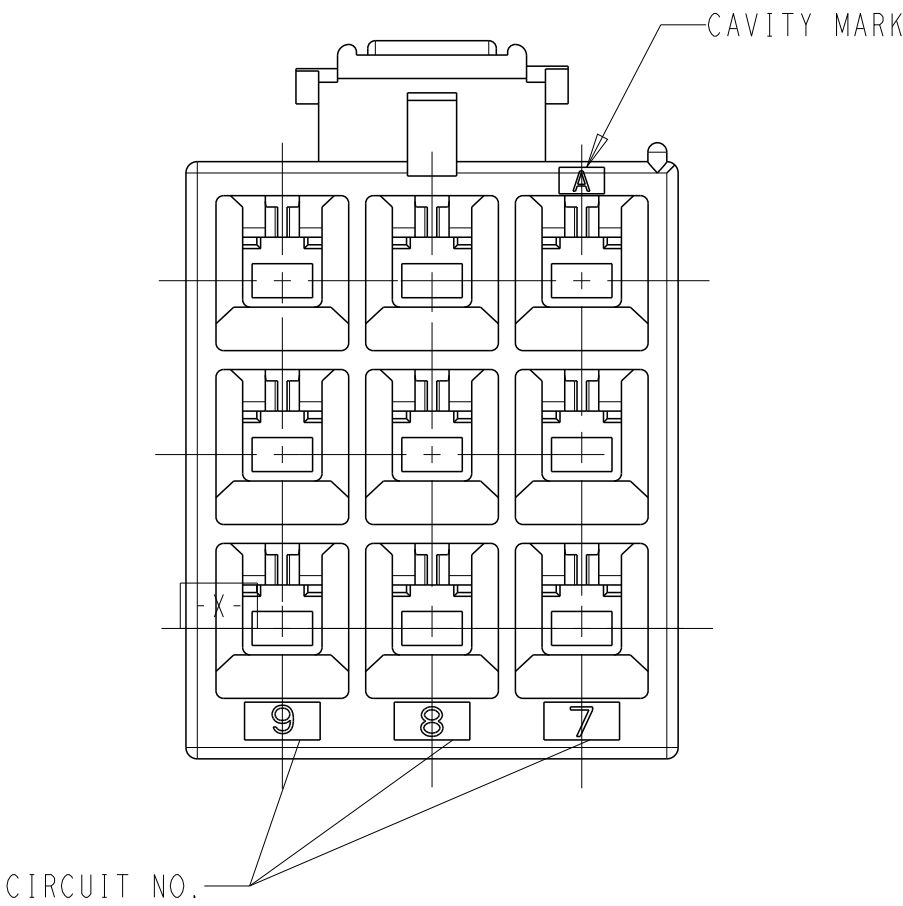

DEVELOPMENT	BLACK	9	176276-9
	BLUE	9	176276-6
	YELLOW	9	176276-4
	RED	9	176276-2
	NATURAL	9	176276-1
	HOUSING COLOR	POSITION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. SHINDO CHK Y. FUJITA APVD N. ONOUE	08NOV1989 13NOV1989 13NOV1989	TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME AMP UNIVERSAL POWER CONN 3.96MM PITCH 9 POS PLUG HSG (TRIPLE ROW)			
0 PLC ±- 1 PLC ±0.25 2 PLC ±0.20 3 PLC ±- 4 PLC ±- ANGLES ±3° FINISH -		PRODUCT SPEC 108-5302 APPLICATION SPEC 114-5142 WEIGHT -		SIZE A2	CAGE CODE 00779	DRAWING NO C-176276	RESTRICTED TO -
MATERIAL 6/6 NYLON (UL94V-0)		CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1	REV C	