

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0717640114

Status:


Active

Overview:

C-Grid Connector Products

Description:

2.54mm Pitch C-Grid Breakaway Header, Low Profile, Dual Row, Right-Angle, High Temperature, 14 Circuits, 0.38µm Gold (Au) Selective Plating

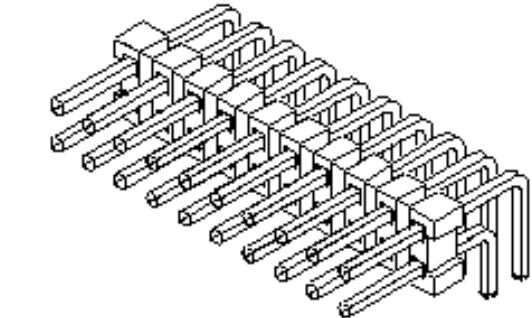

Series image - Reference only

Documents:

- [3D Model](#)
- [3D Model \(PDF\)](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-71764-001 \(PDF\)](#)
- [Application Specification 713080001-AS-000 \(PDF\)](#)
- [Packaging Specification PK-70873-0075-001 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

PCB Headers

Series

71764

Application

Board-to-Board, Signal, Wire-to-Board

Component Type

PCB Header

Overview

C-Grid Connector Products

Product Name

C-Grid

Taxonomy

PCB Headers and Receptacles

UPC

822348430949

Physical

Breakaway

Yes

Circuits (Loaded)

14

Circuits (maximum)

14

Color - Resin

Black

Durability (mating cycles max)

50

Flammability

94V-0

Glow-Wire Capable

No

Lock to Mating Part

None

Material - Metal

Brass, Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

High Temperature Thermoplastic

Net Weight

1.194/g

Number of Rows

2

Orientation

Right Angle

PC Tail Length

2.79mm

PCB Locator

No

PCB Retention

None

Packaging Type

Tube

Pitch - Mating Interface

2.54mm

Plating min - Mating

0.381µm

Plating min - Termination

1.905µm

Polarized to Mating Part

No

Shrouded

No

Stackable

Yes

Temperature Range - Operating

-40° to +105°C

Termination Interface: Style

Through Hole

Electrical

Current - Maximum per Contact

3.0A

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
D(2022)4187-DC (10
June 2022)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

71764 Series

Mates With

C-Grid Surface Mount Right-Angle PCB Receptacle [71979](#) . C-Grid Surface Mount Vertical PCB Receptacle [71395](#) . C-Grid Through-hole Vertical PCB Receptacle [71850](#) . C-Grid Shunt Terminal Housing [7859](#)

Voltage - Maximum	250V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	030
Lead-freeProcess Capability	SMC&WAVE
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	265
Material Info	
Reference - Drawing Numbers	
Application Specification	713080001-AS-000
Packaging Specification	PK-70873-0075-001
Product Specification	PS-71764-001
Sales Drawing	SD-71764-001-001

This document was generated on 01/06/2023

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION