


4

3

2

1

LOC AP	DIST -	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			B1	REVISED PER ECO-11-005139	19MAR11	RK	HMR

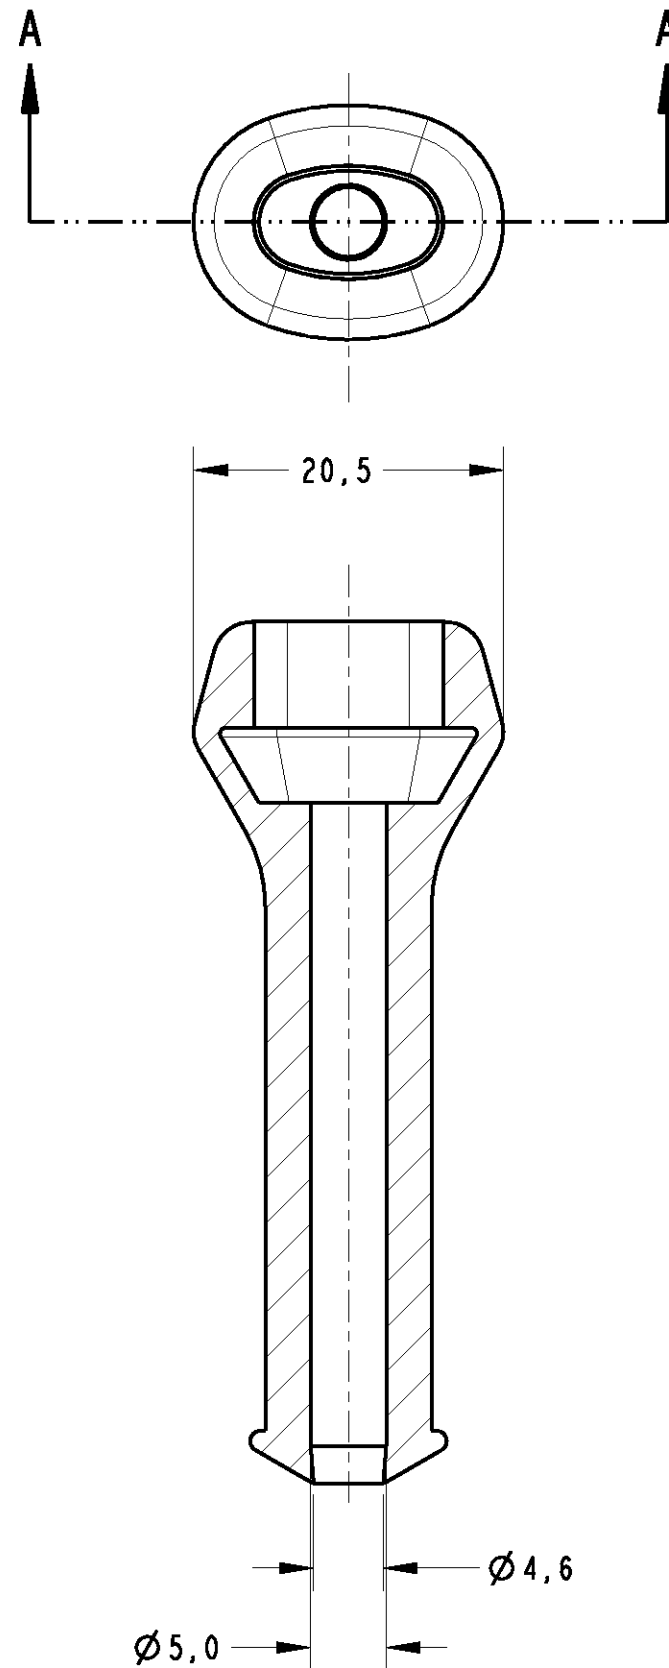

SECTION A-A

- ① - ELASTÔMERO SAE J200, 2BC 414, A14, B14, C12, E014, F17, Z1
Z1=RESISTÊNCIA RASGO, ASTM D624 - 20kg/cm MIN.
- ② - ELASTÔMERO SAE J200, 2BC 514, A14, B14, C12, E014, F17, Z1
Z1=RESISTÊNCIA RASGO, ASTM D624 - 20kg/cm MIN.
- ① -ELASTOMER SAE J200, 2BC 414, A14, B14, C12, E014, F17, Z1
Z1= TEAR RESISTANCE, ASTM D624 -20kg/cm MIN.
- ② -ELASTOMER SAE J200, 2BC 514, A14, B14, C12, E014, F17, Z1
Z1= TEAR RESISTANCE, ASTM D624 -20kg/cm MIN.

①	PRETO/BLACK	40±5 SHORE A	ELASTOMER ①	880810-2
	PRETO/BLACK	50±5 SHORE A	ELASTOMER ②	880810-1
	FINISH	HARDNESS	MATERIAL	PART NUMBER

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0.3 1 PLC ±0.3 2 PLC ±0.3 3 PLC ±0.3 4 PLC ±0.3 ANGLES ±1°		DWN M.L. OGAWA 09JUN99	STE TE Connectivity			
				CHK P.L. FARIA 10JUN99				
MATERIAL SEE TABLE		FINISH SEE TABLE		APVD J.M.M. NETO 10JUN99	NAME COVER CAP 2 POSN			
				PRODUCT SPEC -	-			
CUSTOMER DRAWING		SCALE 2:1		APPLICATION SPEC -	SIZE A3			
				WEIGHT -	CAGE CODE 00779			
					DRAWING NO C=880810			
					RESTRICTED TO -			
					SHEET 1			
					OF 1			
					REV B1			

