




Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors

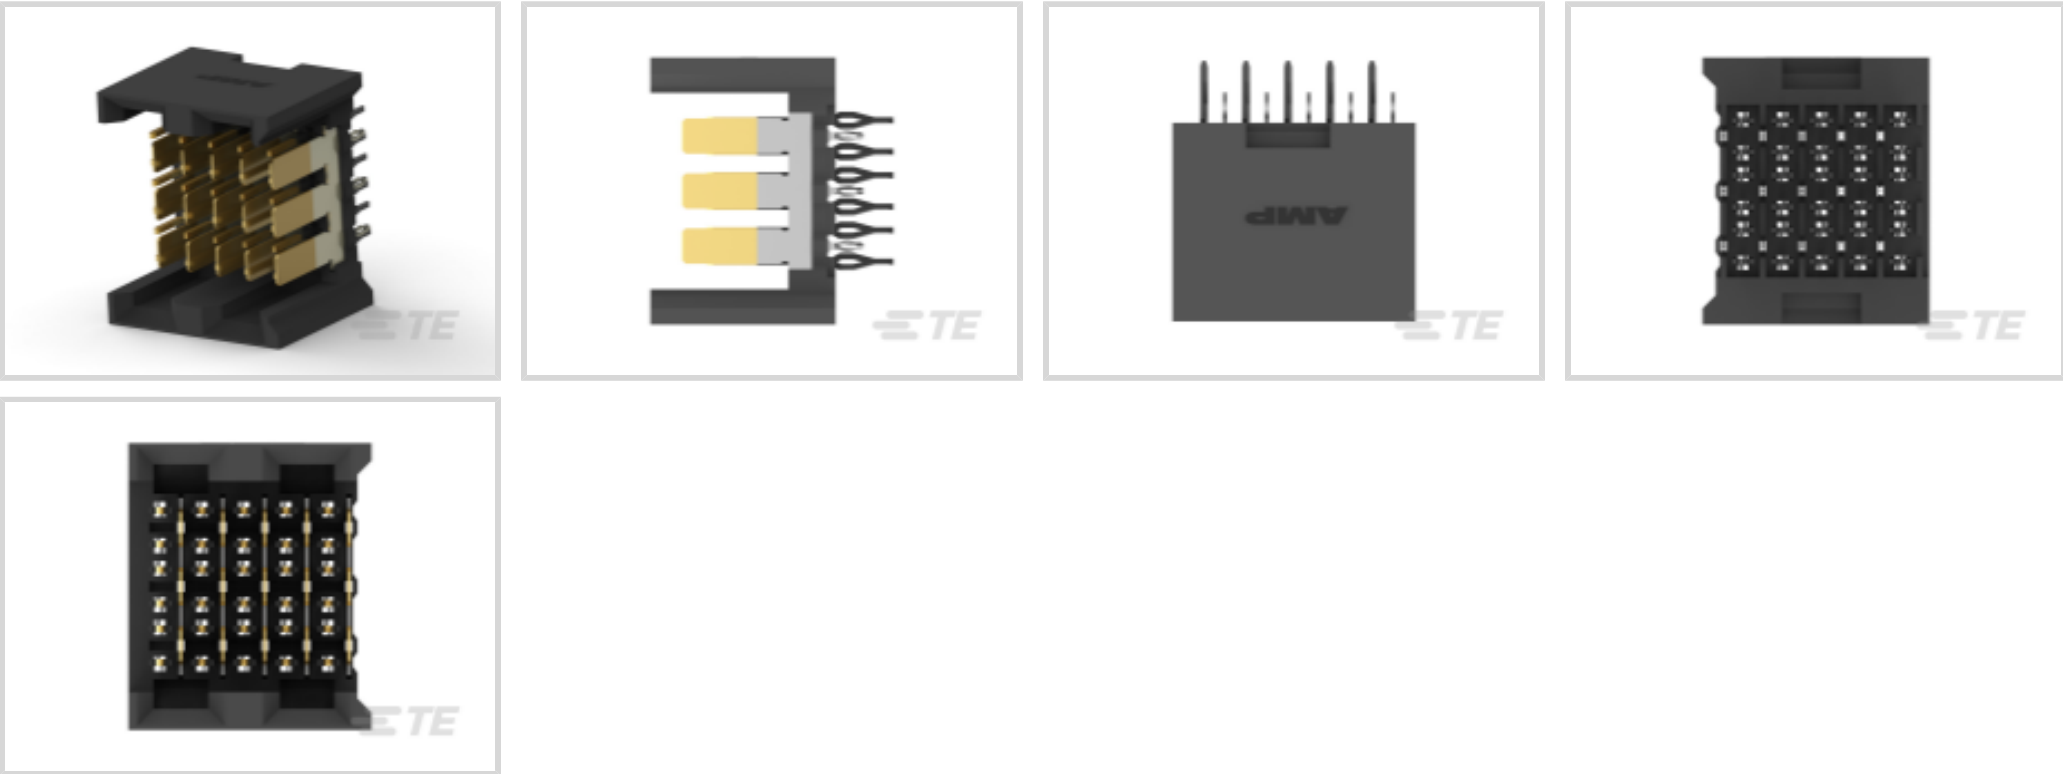

EU RoHS Compliance: **Compliant**
EU ELV Compliance: **Compliant**
Number of Positions: **30**
Row-to-Row Spacing: **2 mm [.078 in]**
Mating Alignment: **With**

Features

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Type Features

Connector & Contact Terminates To	Printed Circuit Board
Connector System	Board-to-Board
Backplane Module Type	Right
PCB Connector Assembly Type	PCB Mount Header
Shroud Style	Partially Shrouded

Configuration Features

Backplane Architecture	Traditional Backplane
Stackable	No
Number of Positions	30
Number of Rows	6
Number of Columns	5



PCB Mount Orientation	Vertical
Electrical Characteristics	
Operating Voltage	250 VAC
Signal Characteristics	
Number of Differential Pairs per Column	3
Body Features	
Guide Pin Style	ESD/HDI
Primary Product Color	Black
Contact Features	
PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Thickness	.5 µm[19.68 µin]
Contact Shape & Form	Dual Beam
Contact Mating Area Plating Material	Tin
Contact Mating Area Length	6.8 mm[.268 in]
Contact Base Material	Phosphor Bronze
PCB Contact Termination Area Plating Material	Tin
Contact Type	Pin
Contact Current Rating (Max)	1.15 A
Termination Features	
Termination Method to PCB	Through Hole - Press-Fit
Termination Post & Tail Length	3.7 mm[.146 in]
Mechanical Attachment	
Guide Hardware	Without
PCB Mount Retention	With
Mating Retention	Without
PCB Mount Retention Type	Action/Compliant Tail
Mating Alignment	With
Mating Alignment Type	Polarization
Connector Mounting Type	Board Mount
Housing Features	
Number of Shrouded Sides	2
Housing Material	Polyester - GF



Centerline (Pitch)	2.5 mm[.098 in]
--------------------	-----------------

Dimensions

PCB Thickness (Recommended)	1.4 mm
Connector Width	24 mm
PCB Hole Diameter	.05 mm[.001 in]
Connector Height	11.95 mm[.47 in]
Connector Length	14.46 mm[.569 in][.945 in]
Row-to-Row Spacing	2 mm[.078 in]

Usage Conditions

Operating Temperature Range	-65 – 105 °C[-85 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits



as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 5120789-1
ZP HS3 DB 06R REC 030P LT PD




TE Part # 5120788-1
ZP HS3 DB 06R REC 030P RT PD


Also in the Series | Z-PACK HS3



Connector Caps & Covers(2)

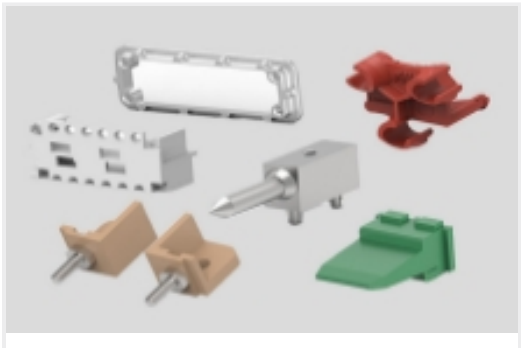

Connector Hardware(1)

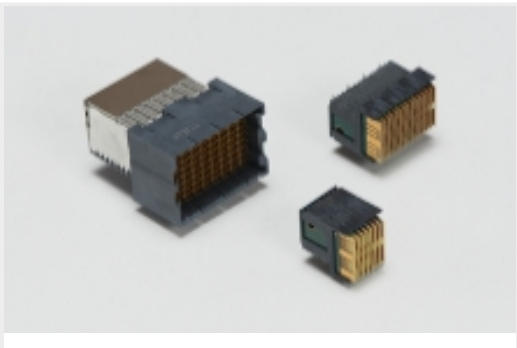

High Speed Backplane Connectors(39)

Customers Also Bought



TE Part #DT04-2P
REC, 2P, GRY, N



TE Part #W2S
Wedgelocks: DEUTSCH DT




TE Part #0460-202-16141
DEUTSCH Solid Contacts



TE Part #282104-1
AMP SUPERSEAL 1.5MM, CONNECTOR HOUSING



TE Part #DT06-2S
PLG, 2P, GRY, N

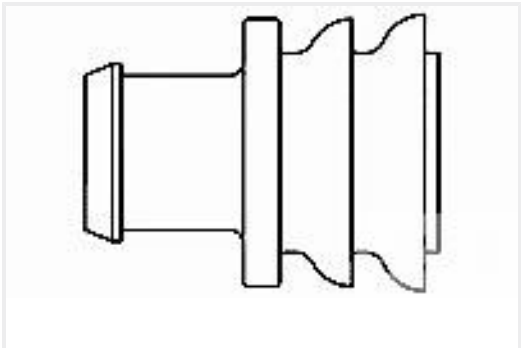

TE Part #281934-2
SINGLE WIRE SEAL



TE Part #114017-ZZ
SEALING PLUG, SIZE 12/16, WHT

Documents



Product Drawings

Z-PACK HS3 HDR ASSY 6R 30P RH

English

CAD Files

Customer View Model

ENG_CVM_CVM_5120677-1_B.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5120677-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5120677-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

High Speed Backplane Connectors catalog - Z-PACK HS3 Connector

English

Product Specifications

Application Specification

English