

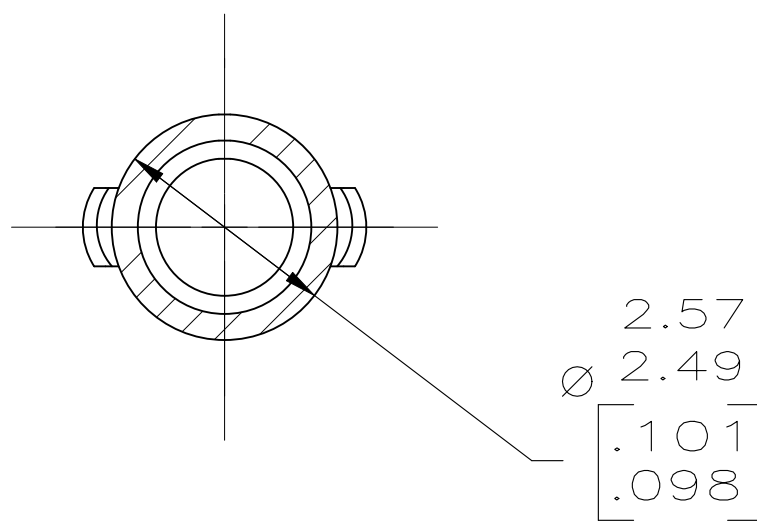
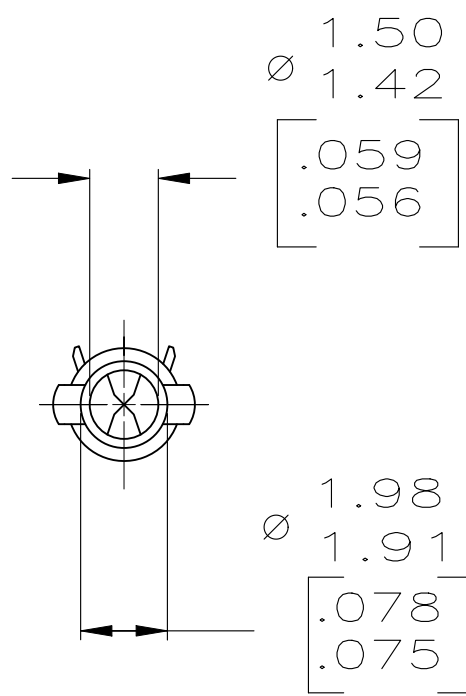
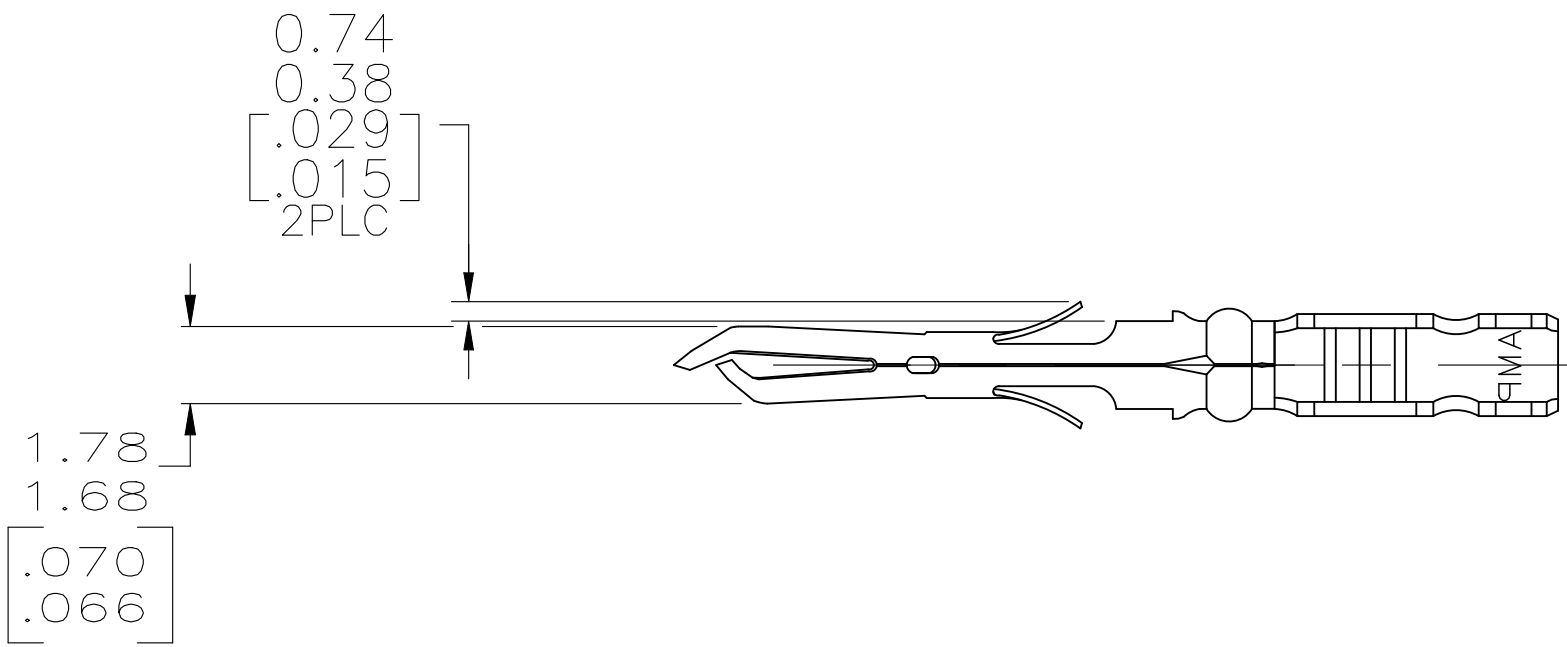


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E		REVISED PER ECR-24-213594	04JUL2024	RK	FJS


- 1 WIRE RANGE: 0.13–0.2mm² (26–24 AWG).
- 2 INSULATION RANGE: 0.64–1.27 [.025–.050] MAX. DIA.
- 3 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4 TIP PLATE WITH 0.00076–0.00091 [.000030–.000036] MIN PRECIOUS METAL PLATE IN THE LOCALIZED GOLD PLATE AREA OVER 0.00127 [.000050] MIN NICKEL UNDERPLATE.

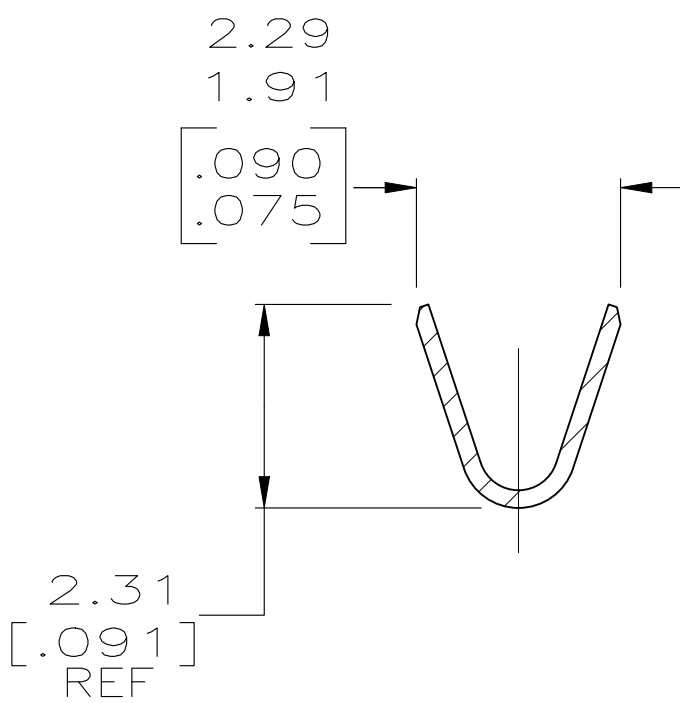


SECTION A–A
SCALE 10:1

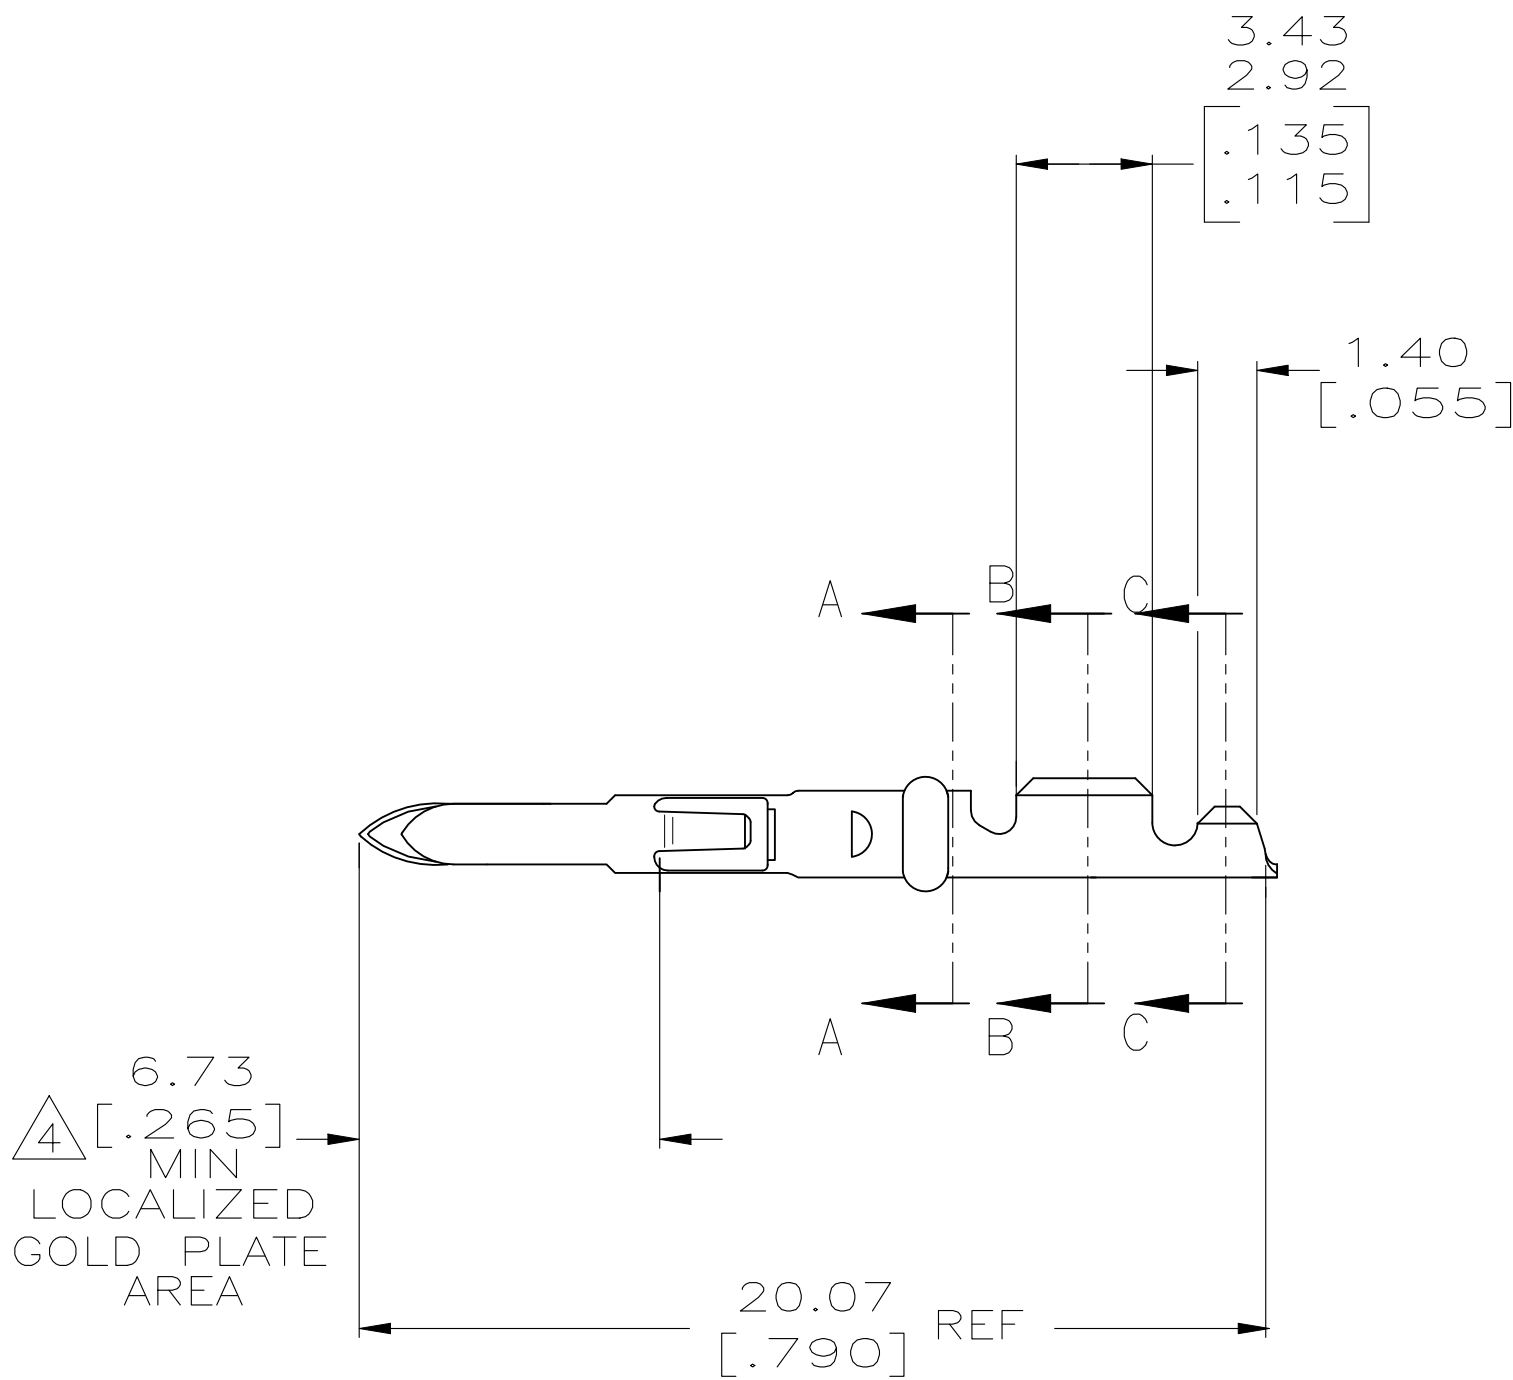

SECTION B–B
SCALE 10:1

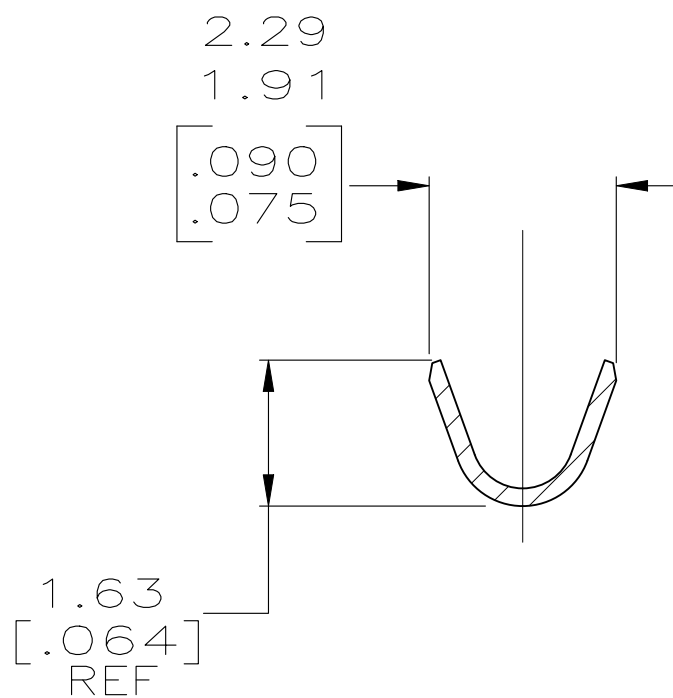

SECTION C–C
SCALE 10:1

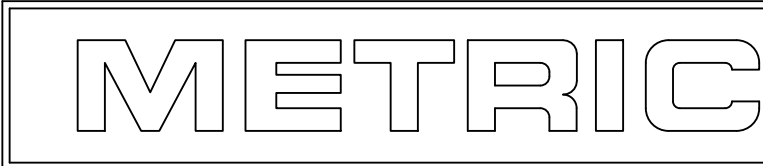

PRECIOUS METAL PLATE		0.20 [.008] PHOS BRZ	640579–2
PRE–TIN		0.20 [.008] PHOS BRZ	640579–1
FINISH		MATERIAL	PART NO
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. SALMON 3–21–95 CHK R. SWING 3–21–95 APVD W. LONG 3–21–95	NAME PIN, LOOSE PIECE, MR
DIMENSIONS: mm (INCHES)		TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC
		0 PLC ± – 1 PLC ± – 2 PLC ± 0.13 [.005] 3 PLC ± – 4 PLC ± – ANGLES ± –	APPLICATION SPEC
MATERIAL SEE TABLE		FINISH SEE TABLE	WEIGHT –
		CUSTOMER DRAWING	SCALE 5:1 SHEET 1 OF 1 REV E