
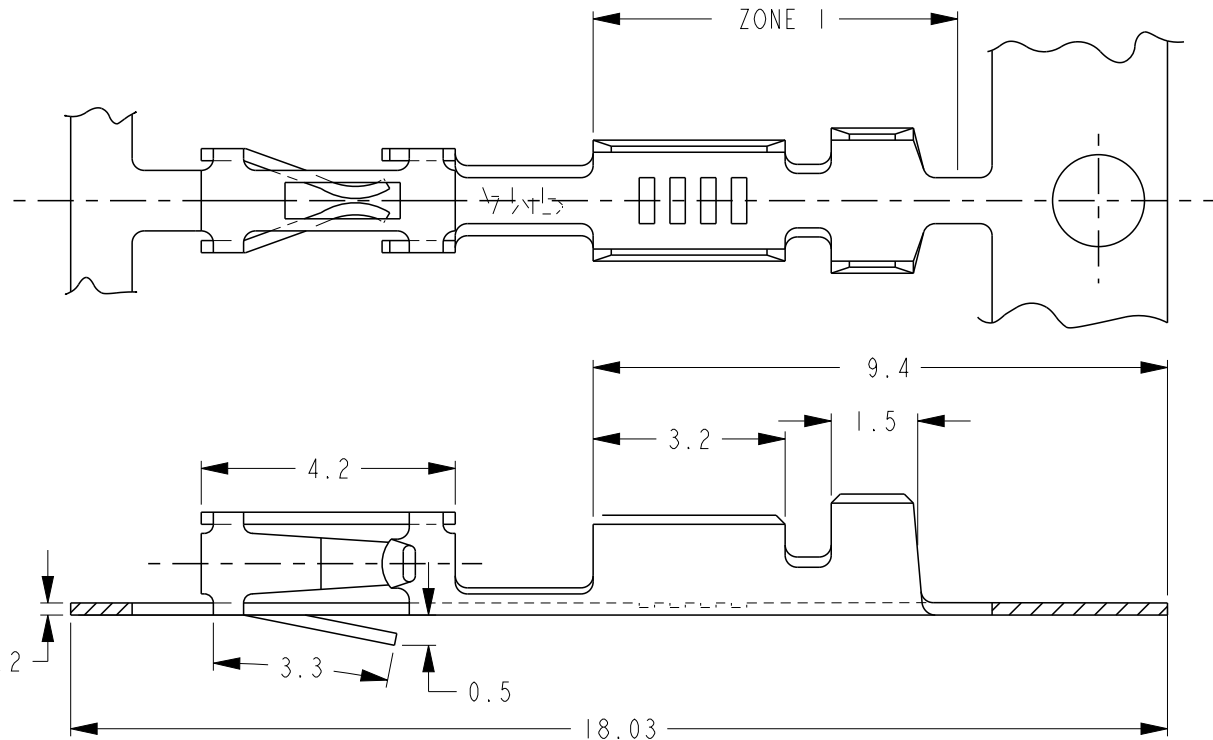


P	LTR	DESCRIPTION	DATE	DWN	APVD
	C3	REVISED PER ECO-12-021315	10JAN2012	KH	JO
	D	STANDARDIZATION OF PLATING AND SPLICING	13AUG2024	GVP	KJK
	D1	ECR-25-261431	28NOV2025	ABS	PS

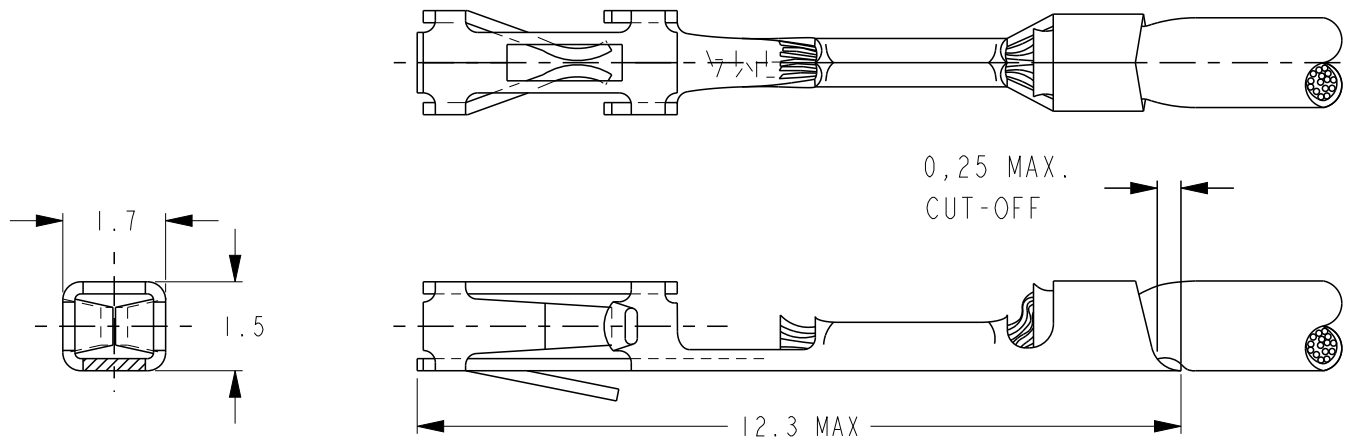

- 1 FOR MINI-APPLICATOR-CRIMPING.
- 2 UNDERCOATING: 1,25μm Ni, SELECTIVE: 0,8μm Au, NO GOLDFLASH.
- 3 UNDERCOATING: 1,25μm Ni, SELECTIVE: 0,8μm Au, GOLDFLASH ON REMAINDER (GOLDFLASH IS NOT MANDATORY ON THE PILOTED CARRIER STRIP).
- 4 PRE-TINPLATED: 2,0μm.
- 5 ZONE 1: MATT TIN PLATED.
- 6 MATERIAL: PHOSPHORBRONZE
- 7 FOR REELFED-HANDTOOL-CRIMPING, 500 CONTACTS ON A SMALL REEL.
- 8 24-20 AWG (0,20-0,56 mm²) WITH .055 CRIMPER.
26 AWG (0,12-0,14 mm²) WITH .042 CRIMPER.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 10 SPLICING - MAXIMUM 1 LOOSE END PER REEL IS ALLOWED.
- 11 OBSOLETE.

WIRE RANGE
8
INSUL. RANGE
1,4 MAX. DIA.

TIN	4	166310-3	5-166309-3	7
GOLD	3	166310-2	5-166309-2	7
GOLD	2 5	166310-1	11 5-166309-1	7
TIN	4	166310-3	166309-3	1
GOLD	3	166310-2	166309-2	1
GOLD	2 5	166310-1	11 166309-1	1
FINISH		LOOSE PIECE	PARTNUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Rv HEUVEN 25JUNE07	 TE Connectivity	
DIMENSIONS: mm		CHK MvD 25JUNE07		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD MvD	NAME AMPMODU MOD. V RECEPTACLE, HIGH PRESSURE, STRIP.	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 108-25007	SIZE A3	
MATERIAL -		APPLICATION SPEC 114-25003	CAGE CODE 00779	DRAWING NO 166309
FINISH SEE TABLE		WEIGHT -	RESTRICTED TO -	
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1
			REV D1	