




Terminals & Splices > Quick Disconnects

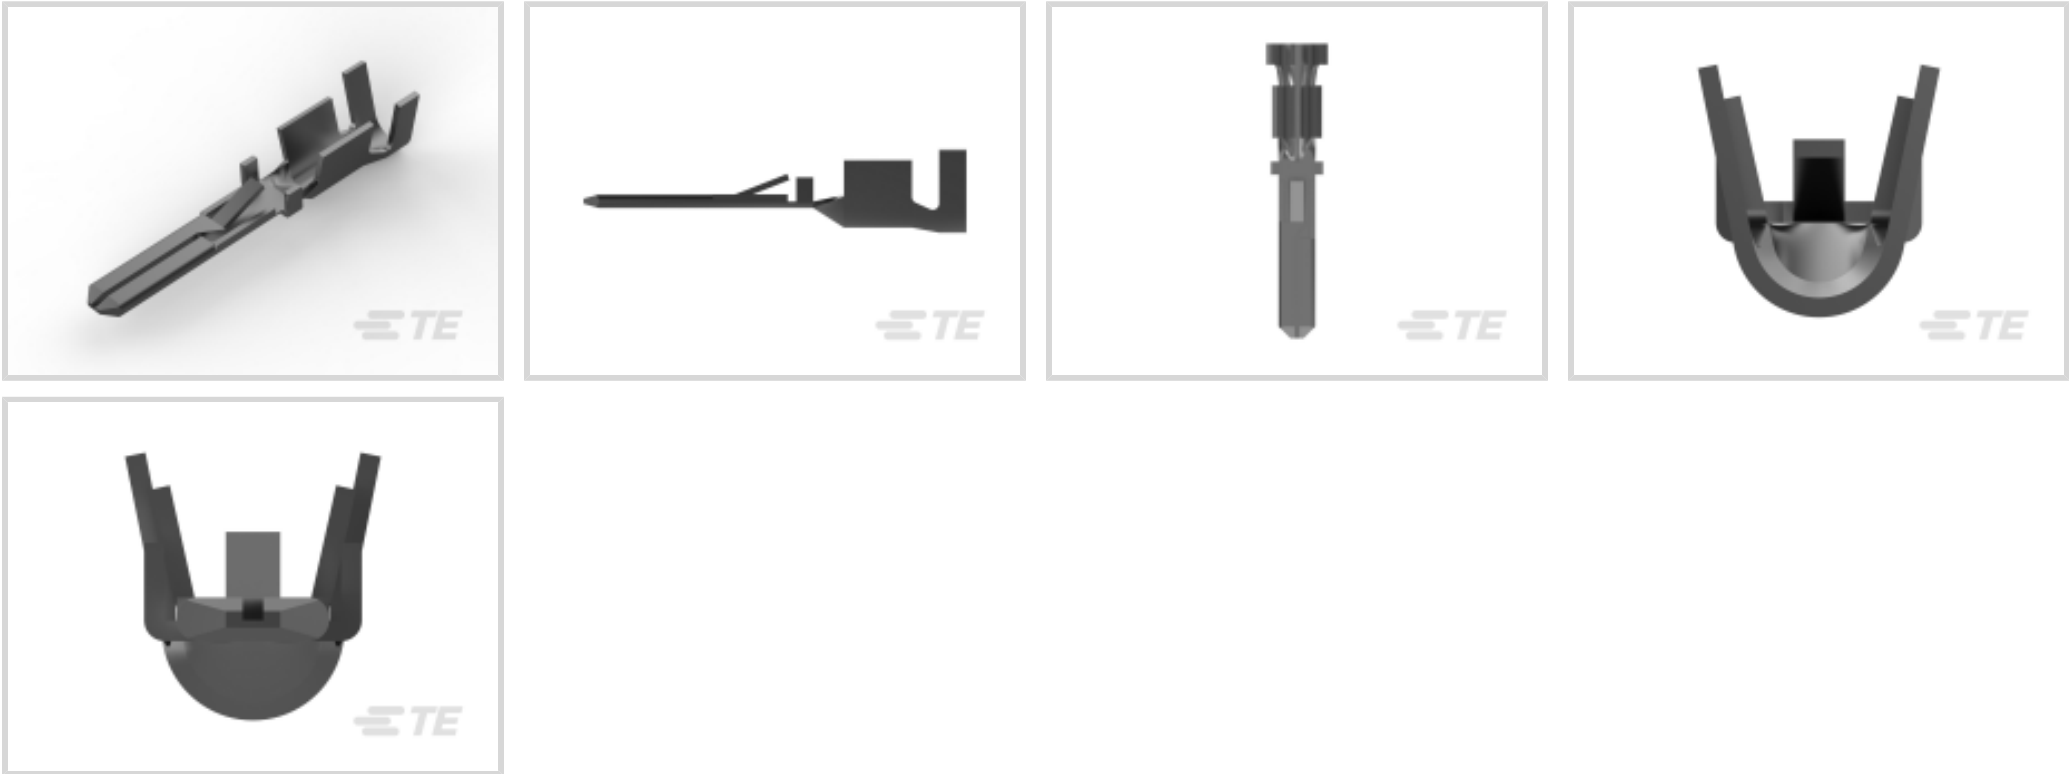

Quick Disconnect Terminal Type: **Tab**

Wire Size: **2048 – 5180 CMA**

Mating Tab Width: **2.8 mm [.11 in]**

Features

Contact Features

|                                |                   |
|--------------------------------|-------------------|
| Quick Disconnect Terminal Type | Tab               |
| Mating Tab Width               | 2.8 mm[.11 in]    |
| Mating Tab Thickness           | .79 mm[.031 in]   |
| Terminal Orientation           | Straight          |
| Contact Base Material          | Copper Zinc Alloy |
| Terminal Plating Material      | Tin               |
| Crimp Type                     | F-Crimp           |
| Barrel Type                    | Open              |

Dimensions

|                                      |                              |
|--------------------------------------|------------------------------|
| Wire Size                            | 2048 – 5180 CMA              |
| Product Length                       | 22.5 mm[.886 in]             |
| Compatible Insulation Diameter Range | 1.8 – 2.9 mm[.071 – .114 in] |

Packaging Features

|                    |      |
|--------------------|------|
| Packaging Method   | Box  |
| Packaging Quantity | 1000 |



Product Type Features

|                 |        |
|-----------------|--------|
| Insertion Force | Normal |
|-----------------|--------|

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Insulation Option           | Uninsulated                |
| Operating Temperature Range | -40 – 130 °C[-40 – 266 °F] |

Other

|                    |           |
|--------------------|-----------|
| EU RoHS Compliance | Compliant |
| EU ELV Compliance  | Compliant |

Configuration Features

|                                   |               |
|-----------------------------------|---------------|
| Compatible With Wire & Cable Type | Discrete Wire |
| Connection Capacity               | Single        |

Termination Features

|                       |              |
|-----------------------|--------------|
| Product Terminates To | Wire & Cable |
|-----------------------|--------------|

Mechanical Attachment

|                       |                 |
|-----------------------|-----------------|
| Locking Lance Height  | 1.2 mm[.047 in] |
| Mating Retention Type | Locking Lance   |

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

|                                               |                                                                                                                                 |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                       |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                       |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                         |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2024 (241)<br>Candidate List Declared Against: JUNE 2024 (241)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                             |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                    |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent



chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1-1579007-4  
EXTRACTION TOOL



TE Part # 4-1579007-3  
EXTRACTION TOOL KIT



TE Part # 2396645-1  
SDE F 2.8 FASTIN-ON 15-13 ASSY



TE Part # 2396645-2  
SDE F 2.8 FASTIN-ON 15-13 DIE SET




TE Part # 169400  
CERTI-LOK FRAME W/O DIES


Also in the Series | FASTIN-FASTON 110



Automotive Housings(6)

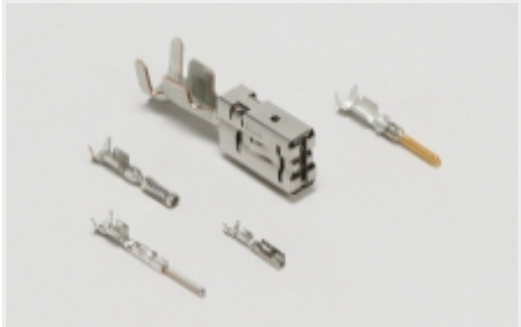

Automotive Terminals(5)

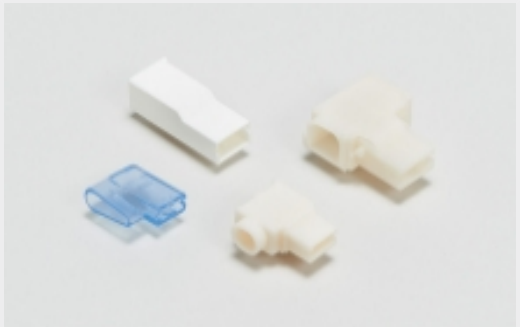

Crimp Terminal Housings(34)



Insertion & Extraction Tools(3)



Quick Disconnects(83)



Customers Also Bought



TE Part #929505-7  
Timer Connector Housing



TE Part #927777-6  
JUNIOR POWER TIMER CONTACT



TE Part #928923-1  
FF FLACHST MIF 2,8

Documents

Product Drawings  
FF 110 TAB PTP CUZN30

English

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_928794-2\_R.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_928794-2\_R.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_928794-2\_R.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.