
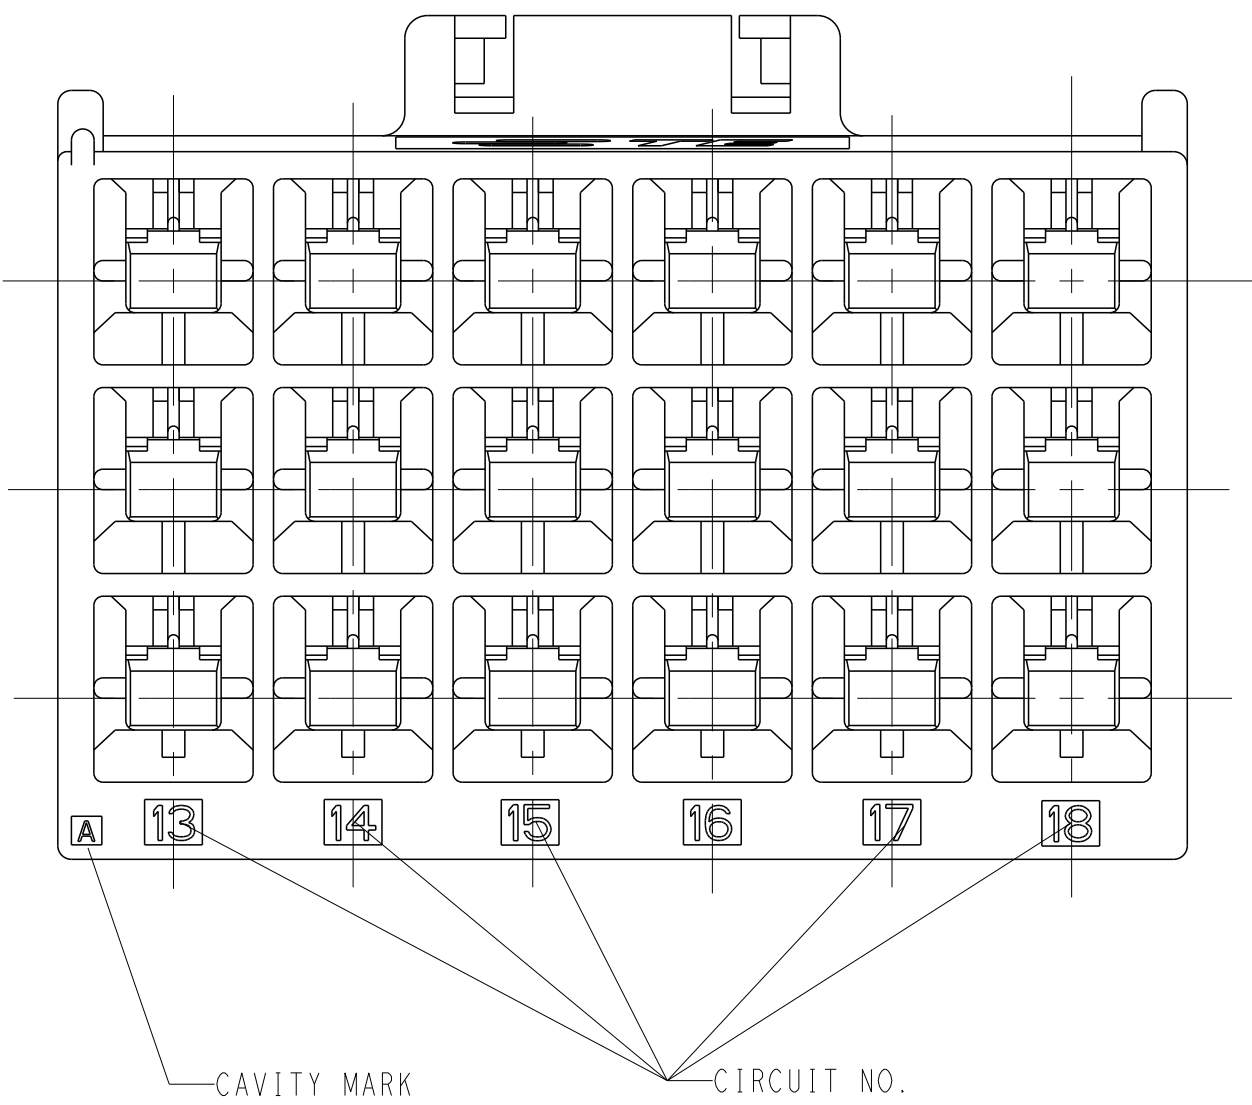
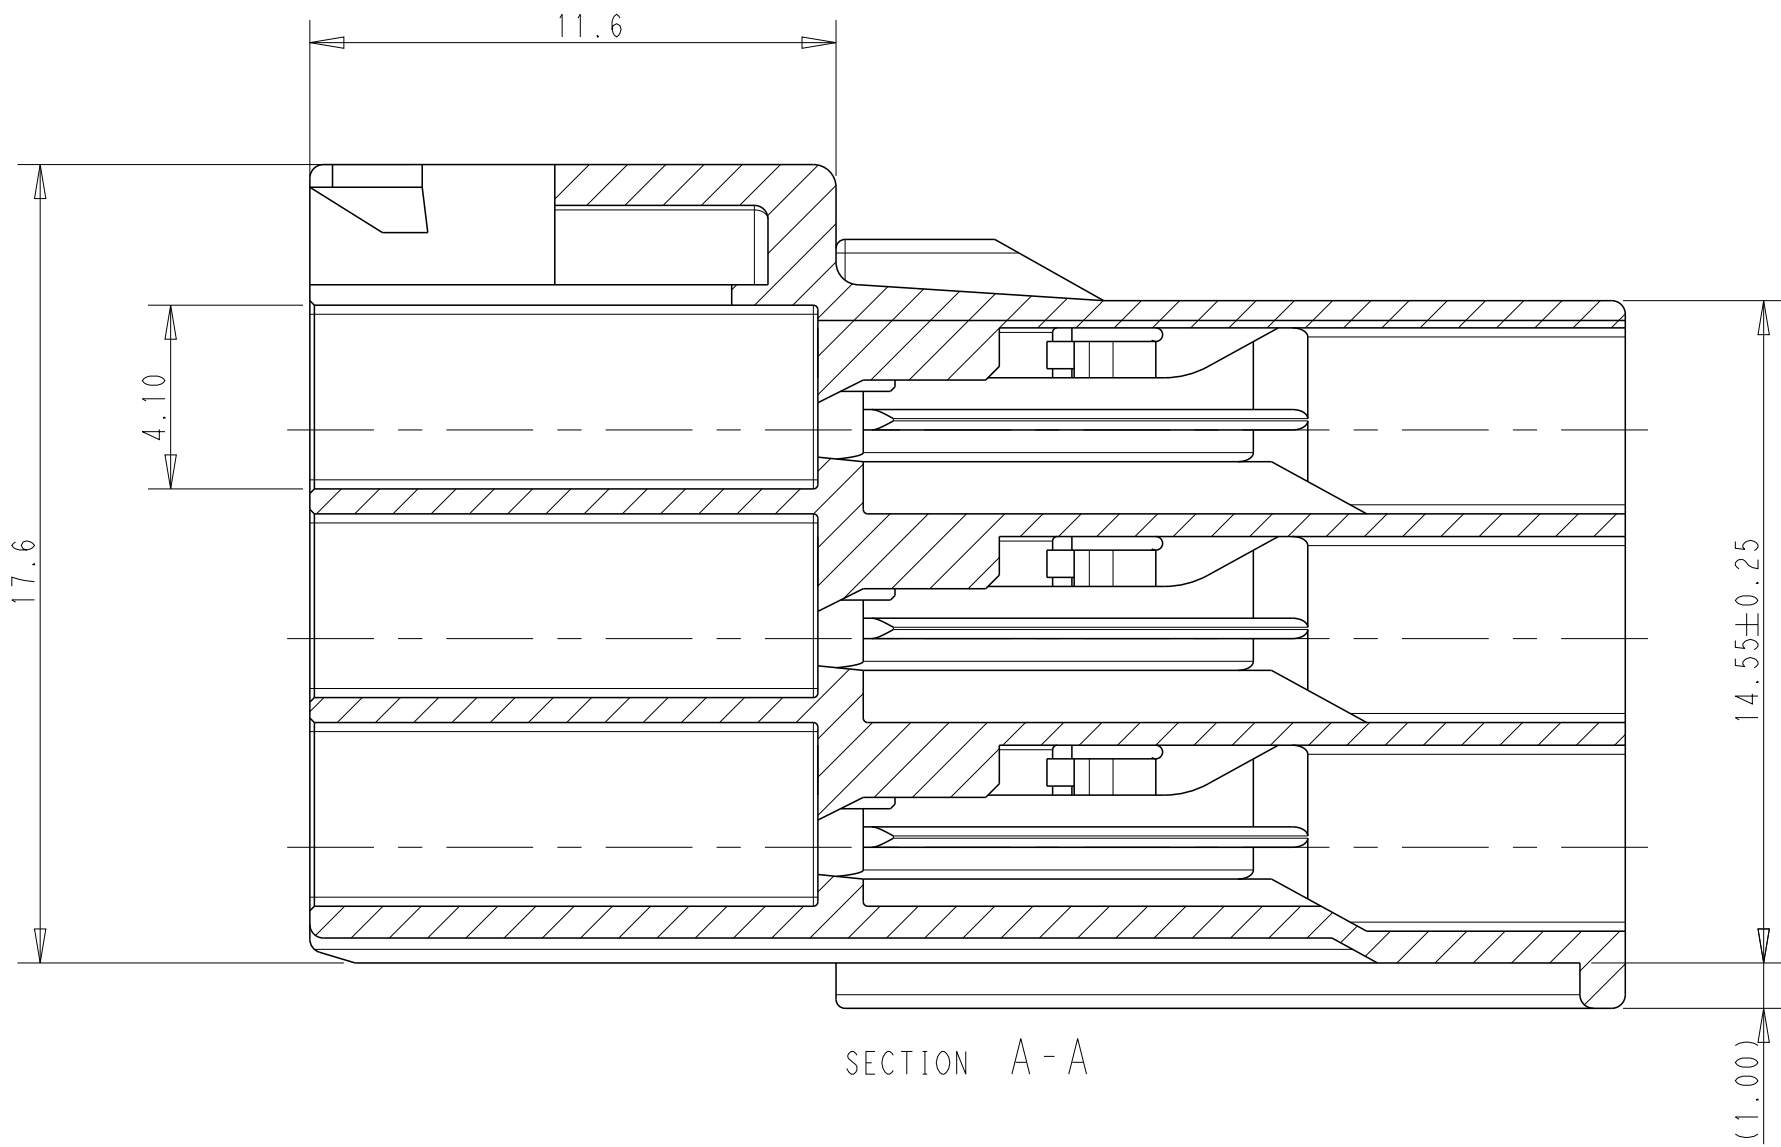
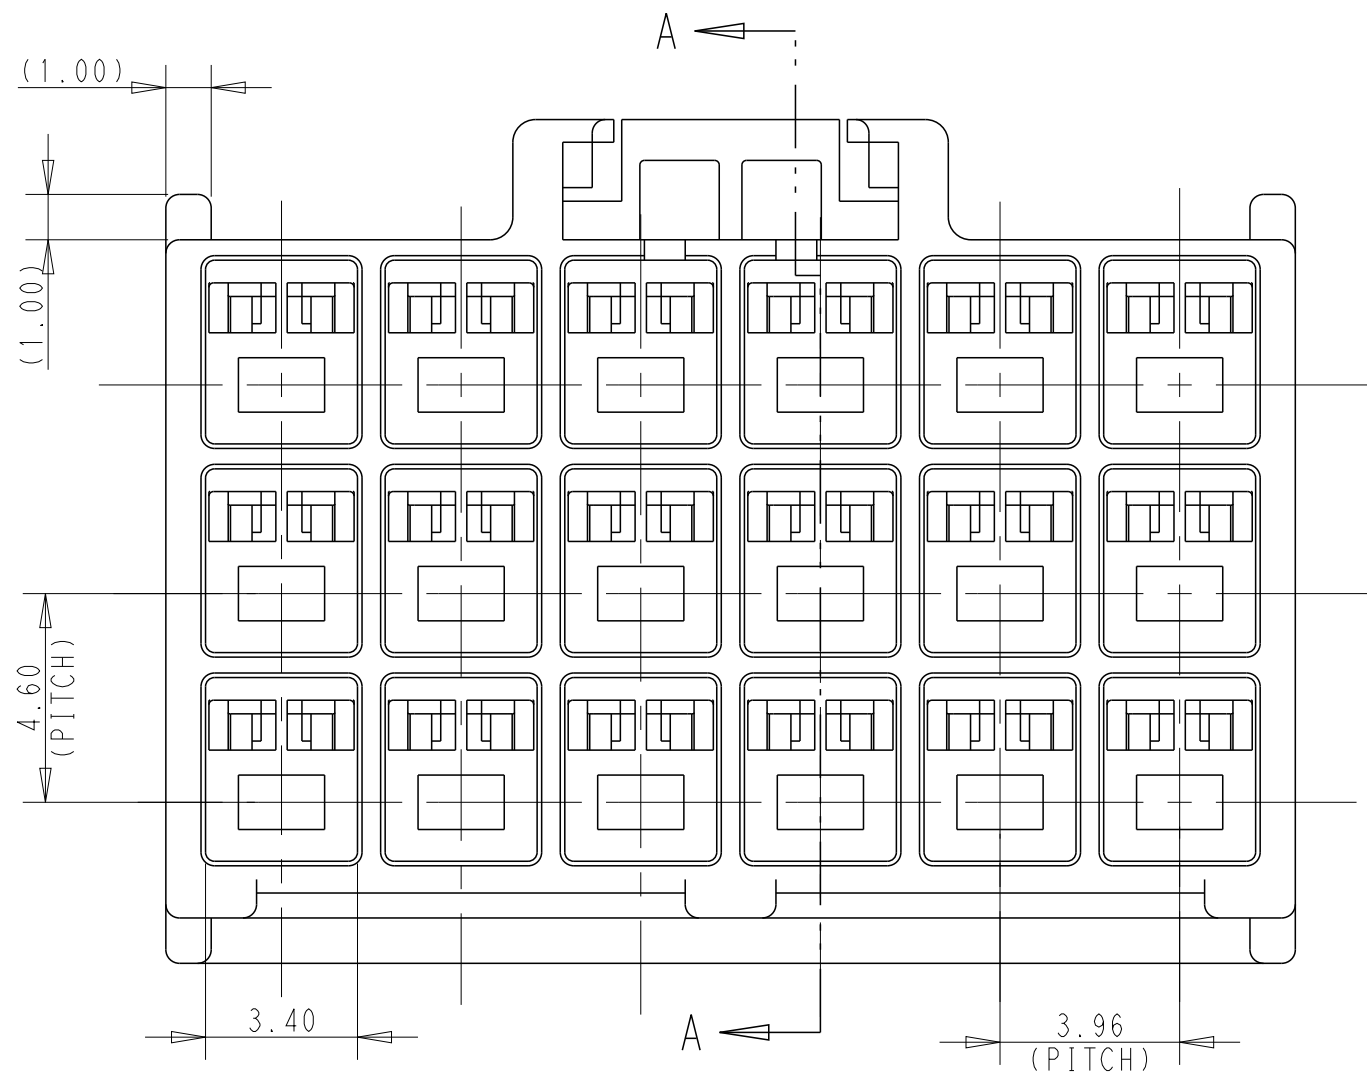


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECR-20-100642	19SEP2022	M.G	D.Z

NOTES:

- 1 APPLICABLE CONTACT P/N:
TAB CONTACT: 175150- (20-16 AWG)
175149- (26-22 AWG)
- 2 MATING CONN.P/N:
PLUG HSG: 176280-
REC CONTACT: 175152- (20-16AWG)
175151- (20-22AWG)
- 3 INSTRUCTION SHEET: IS-503J.

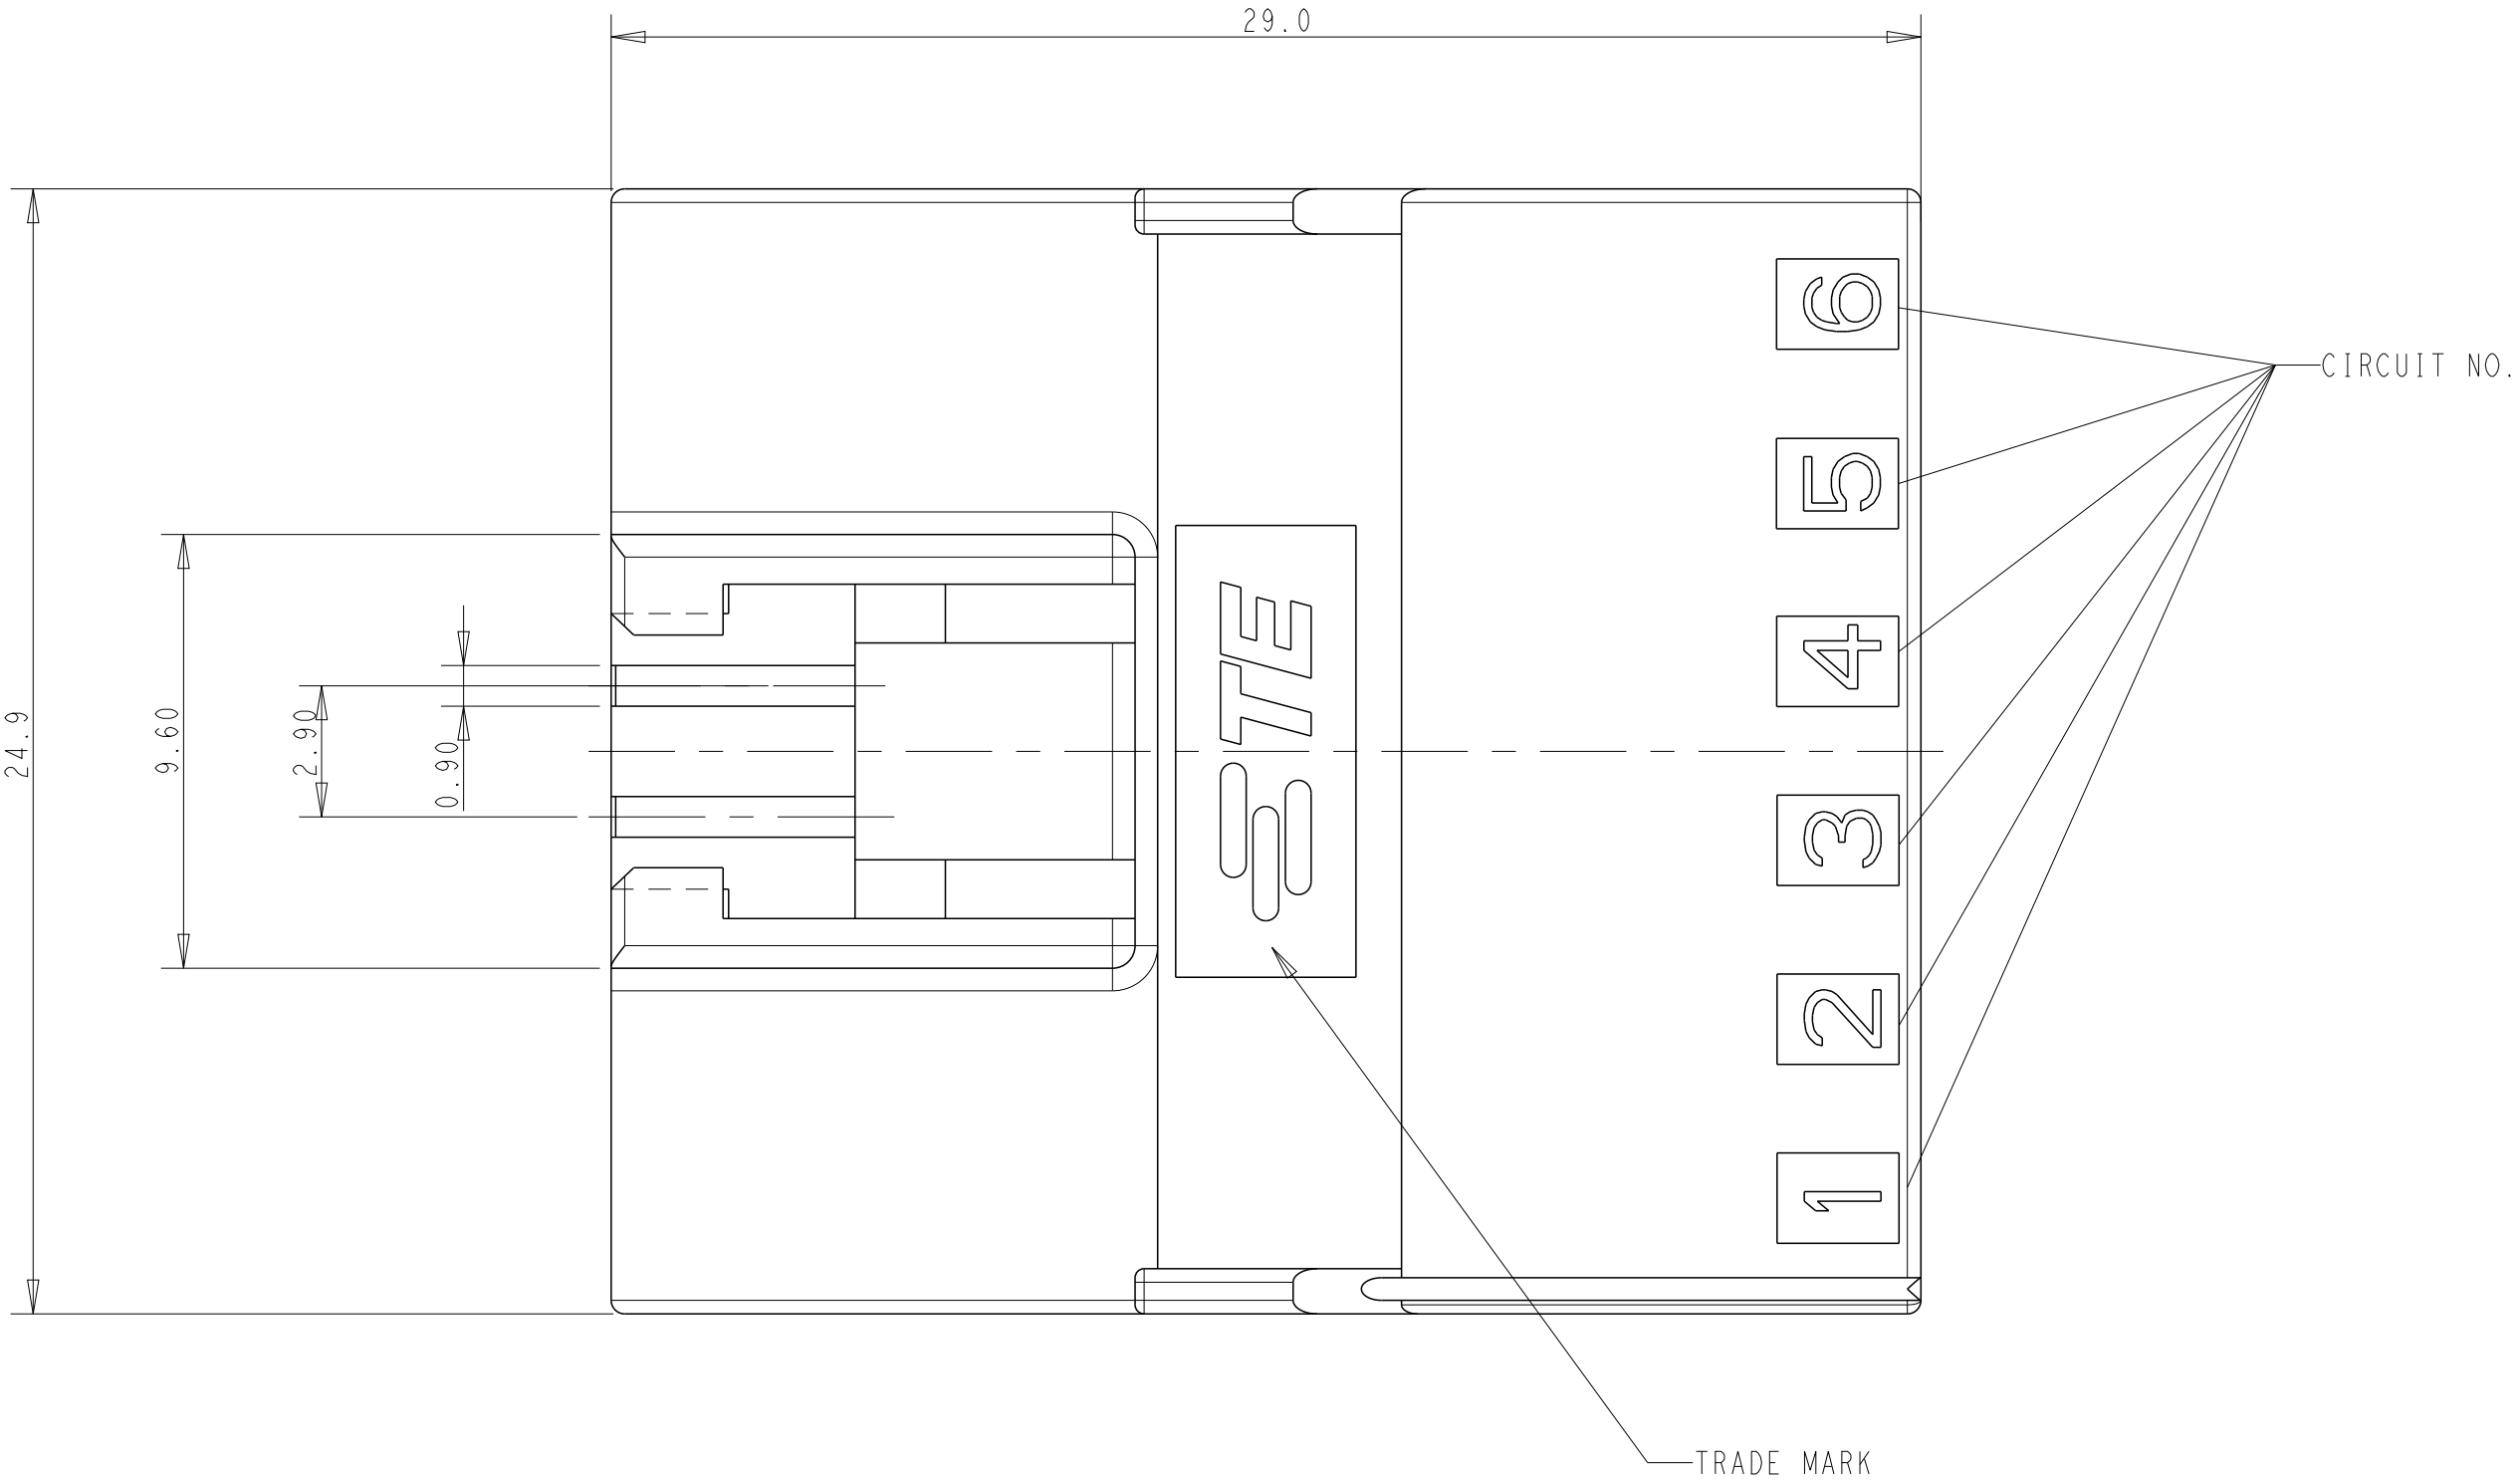

	18	BLACK	176291-9
DEVELOPMENT	18	BLUE	176291-6
DISCONTINUED	18	YELLOW	176291-4
DISCONTINUED	18	RED	176291-2
	18	NATURAL	176291-1
POS.	COLOR	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. SHINDO 23NOV89	TE Connectivity	
		CHK M. YOSHIDA 28NOV89		
		APVD N. ONQUE 28NOV89		
		PRODUCT SPEC		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME	
mm		0 PLC ±0.25	AMP UNIVERSAL POWER CONN 3.96 PITCH CAP HOUSING 18 POS (TPL ROW)	
		1 PLC ±0.2		
		2 PLC ±0.2		
		3 PLC ±0.2		
		4 PLC ±0.2	SIZE CAGE CODE DRAWING NO	
		ANGLES ±3°	A 00779 C=176291	
		FINISH	RESTRICTED TO	
MATERIAL		6/6 NYLON (UL94 V-0)	SCALE 6:1 SHEET 1 OF 1 REV B	
			CUSTOMER DRAWING	