
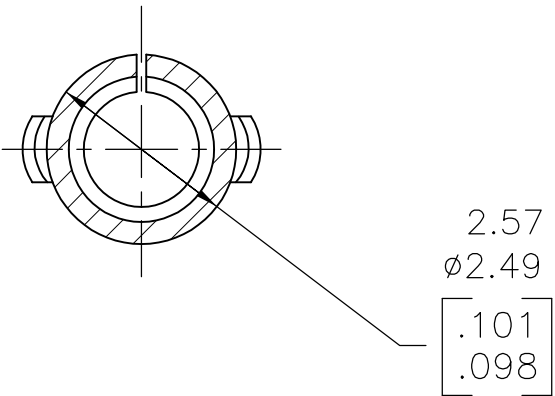
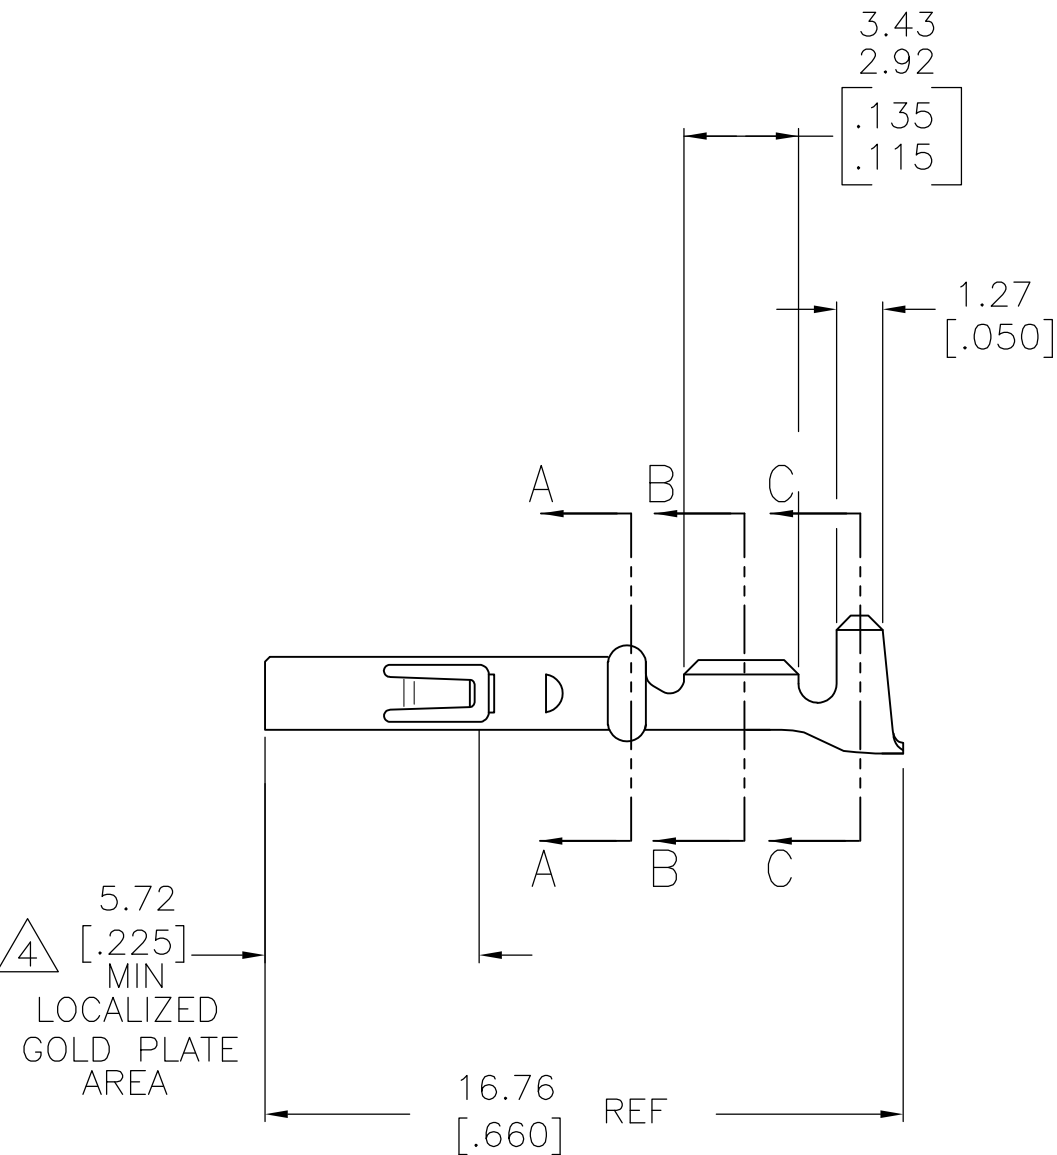
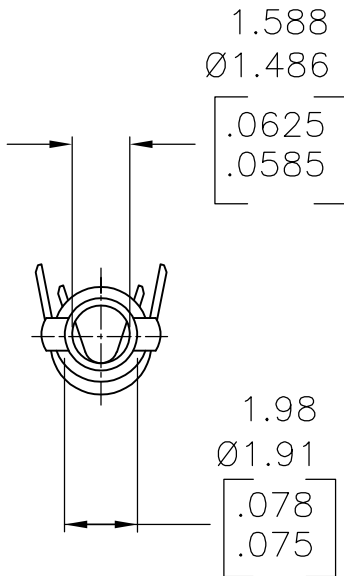


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	REVISED PER ECO-16-014163	29SEP2016	NK	MM


- 1 WIRE RANGE: 0.12–0.9mm² (26–18 AWG).
- 2 INSULATION RANGE: 1.27–2.92 [.050–.115] MAX. DIA.
- 3 DIMENSIONS IN BRACKETS ARE IN INCHES.

4


PLATE INTERNALLY WITH 0.00076 [.000030] MIN GOLD IN THE LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER 0.00127 [.000050] MIN NICKEL UNDERPLATE.

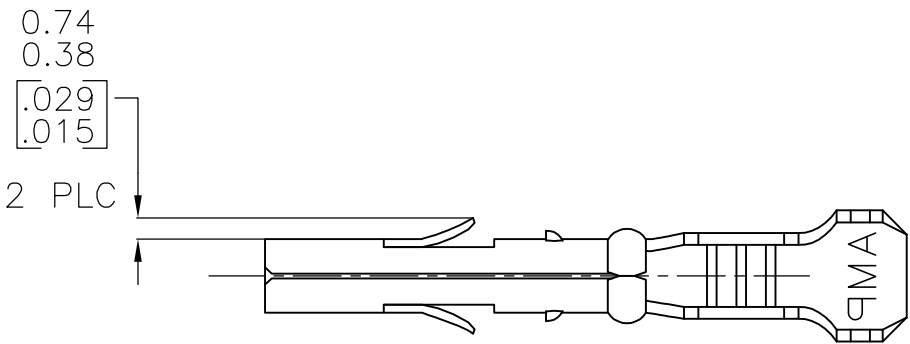

SECTION A—A
SCALE 10:1

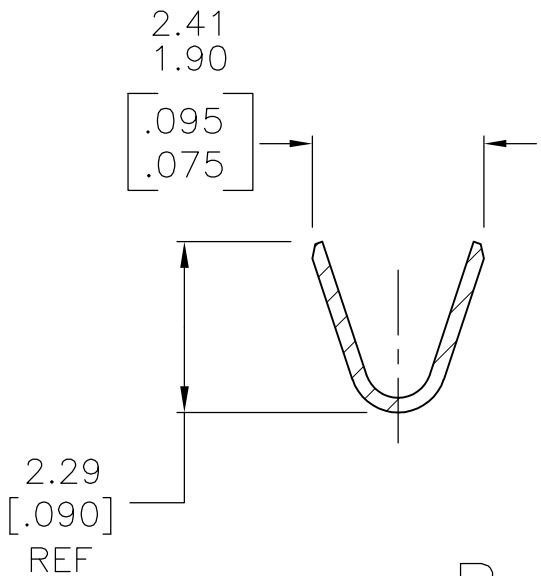

SECTION B—B
SCALE 10:1

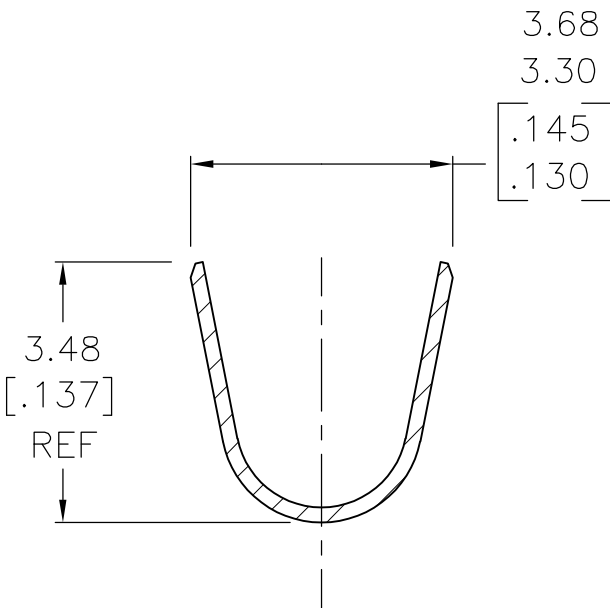

SECTION C—C
SCALE 10:1

4 GOLD STRIPE	0.20 [.008] PHOS BRZ	641300–2
PRE–TIN	0.20 [.008] PHOS BRZ	641300–1
FINISH	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. SALMON 3–21–95	TE Connectivity	
		CHK R. SWING 3–21–95		
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD W. LONG 3–21–95	NAME RECEPTACLE, LOOSE PIECE, MR	
		PRODUCT SPEC		
	0 PLC ± – 1 PLC ± – 2 PLC ± – 3 PLC ± 0.13 [.005] 4 PLC ± – ± – ANGLES ± ± –	APPLICATION SPEC	SIZE A1	
		—		
MATERIAL SEE TABLE	FINISH SEE TABLE	WEIGHT	A100779C641300	
CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1	REV B2