

D

C

B

A





D

C

B

A

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
D9	REVISED	ECR-25-257250	19SEP2025	AY	KY

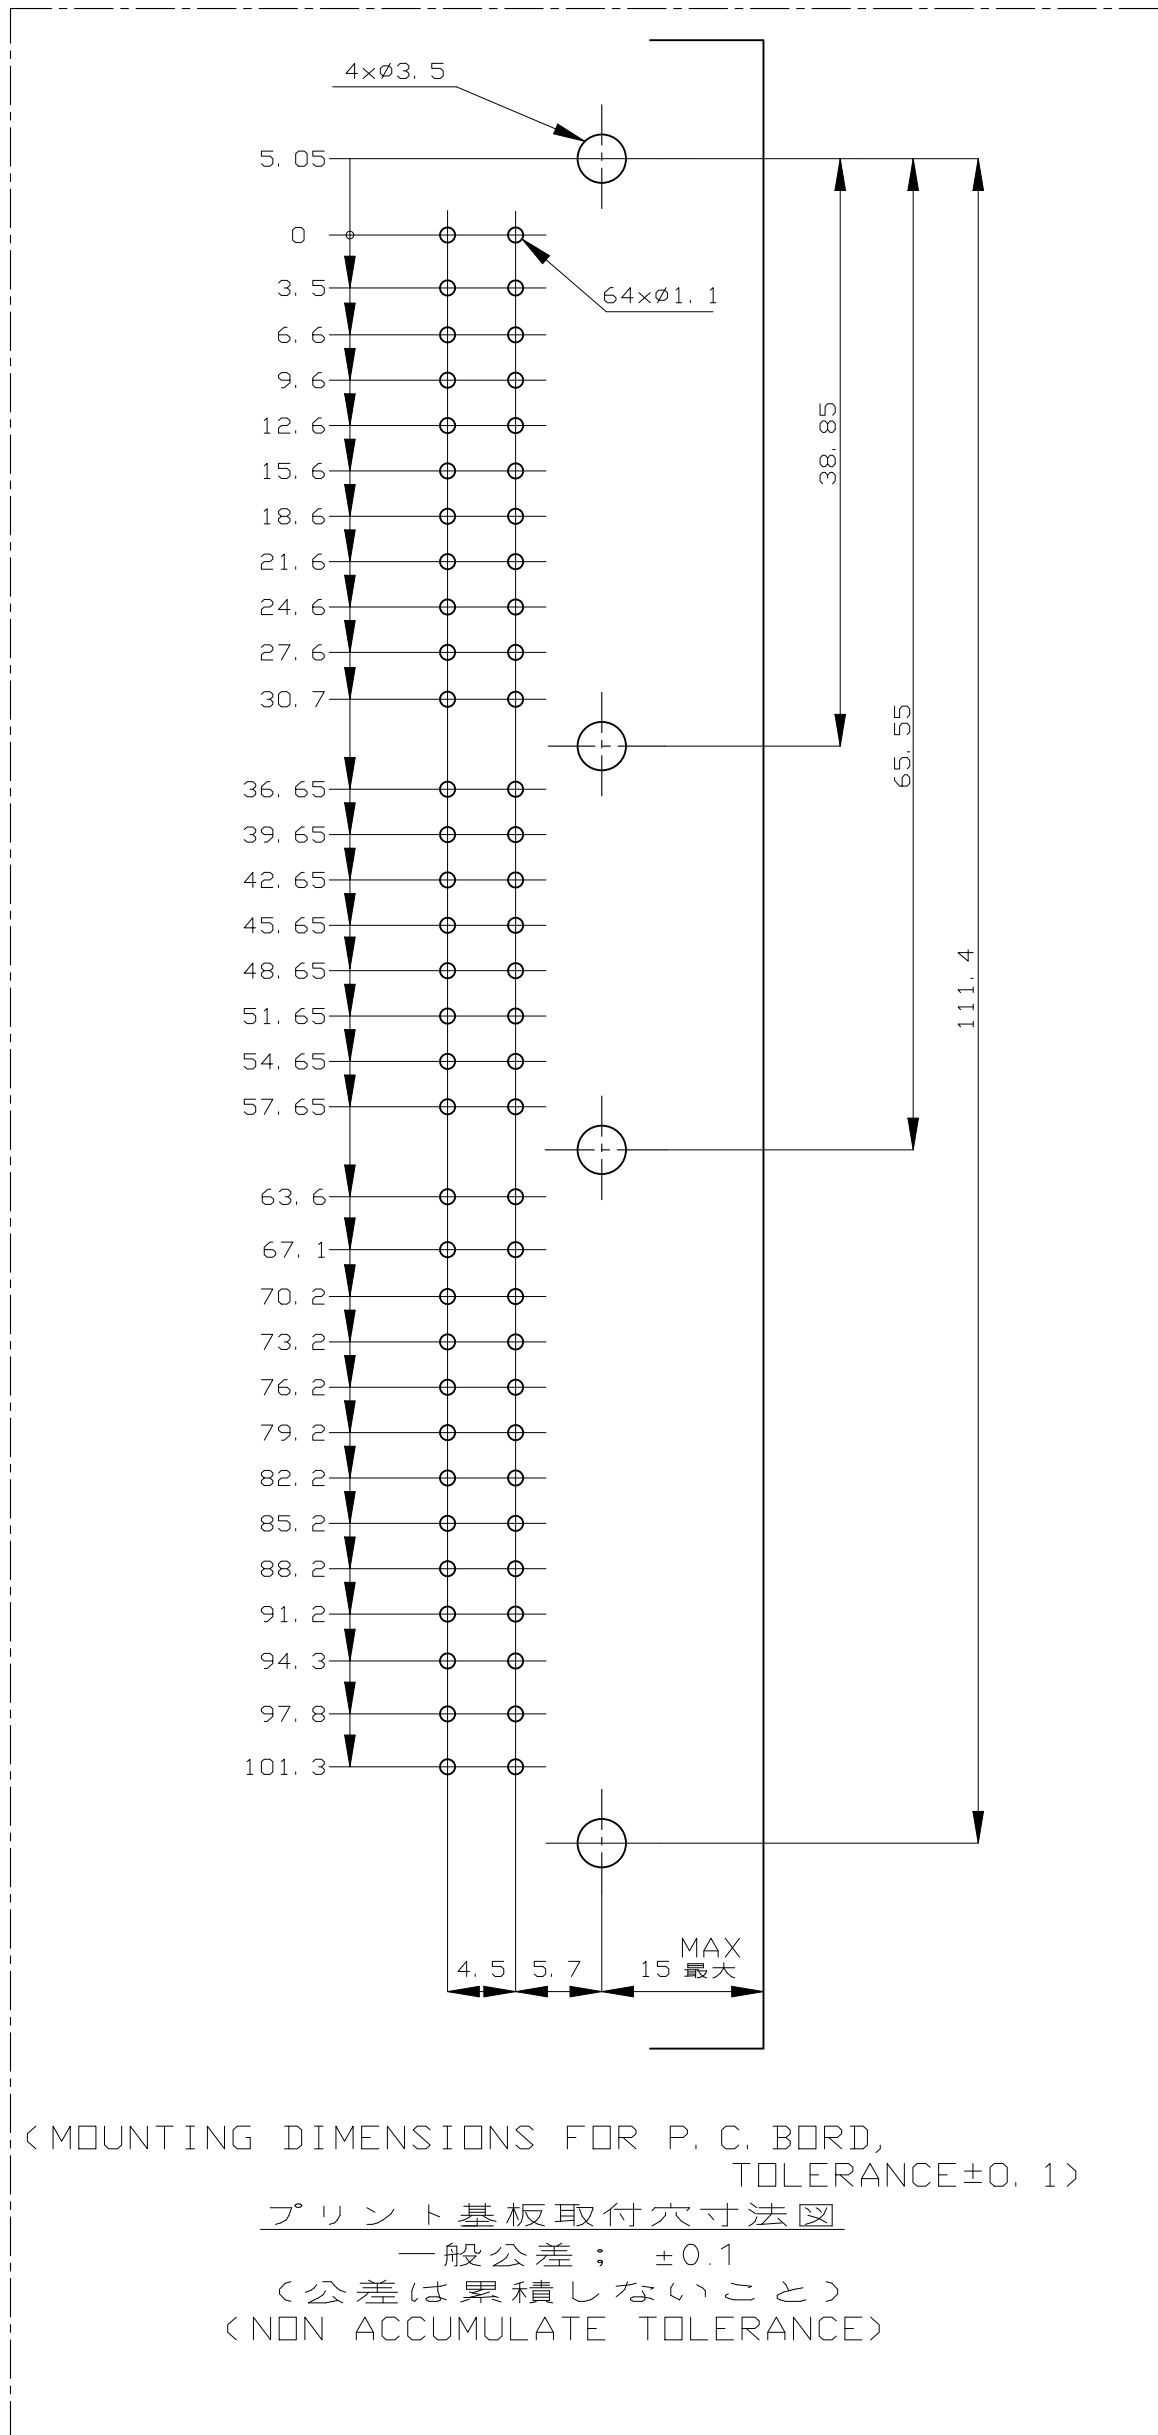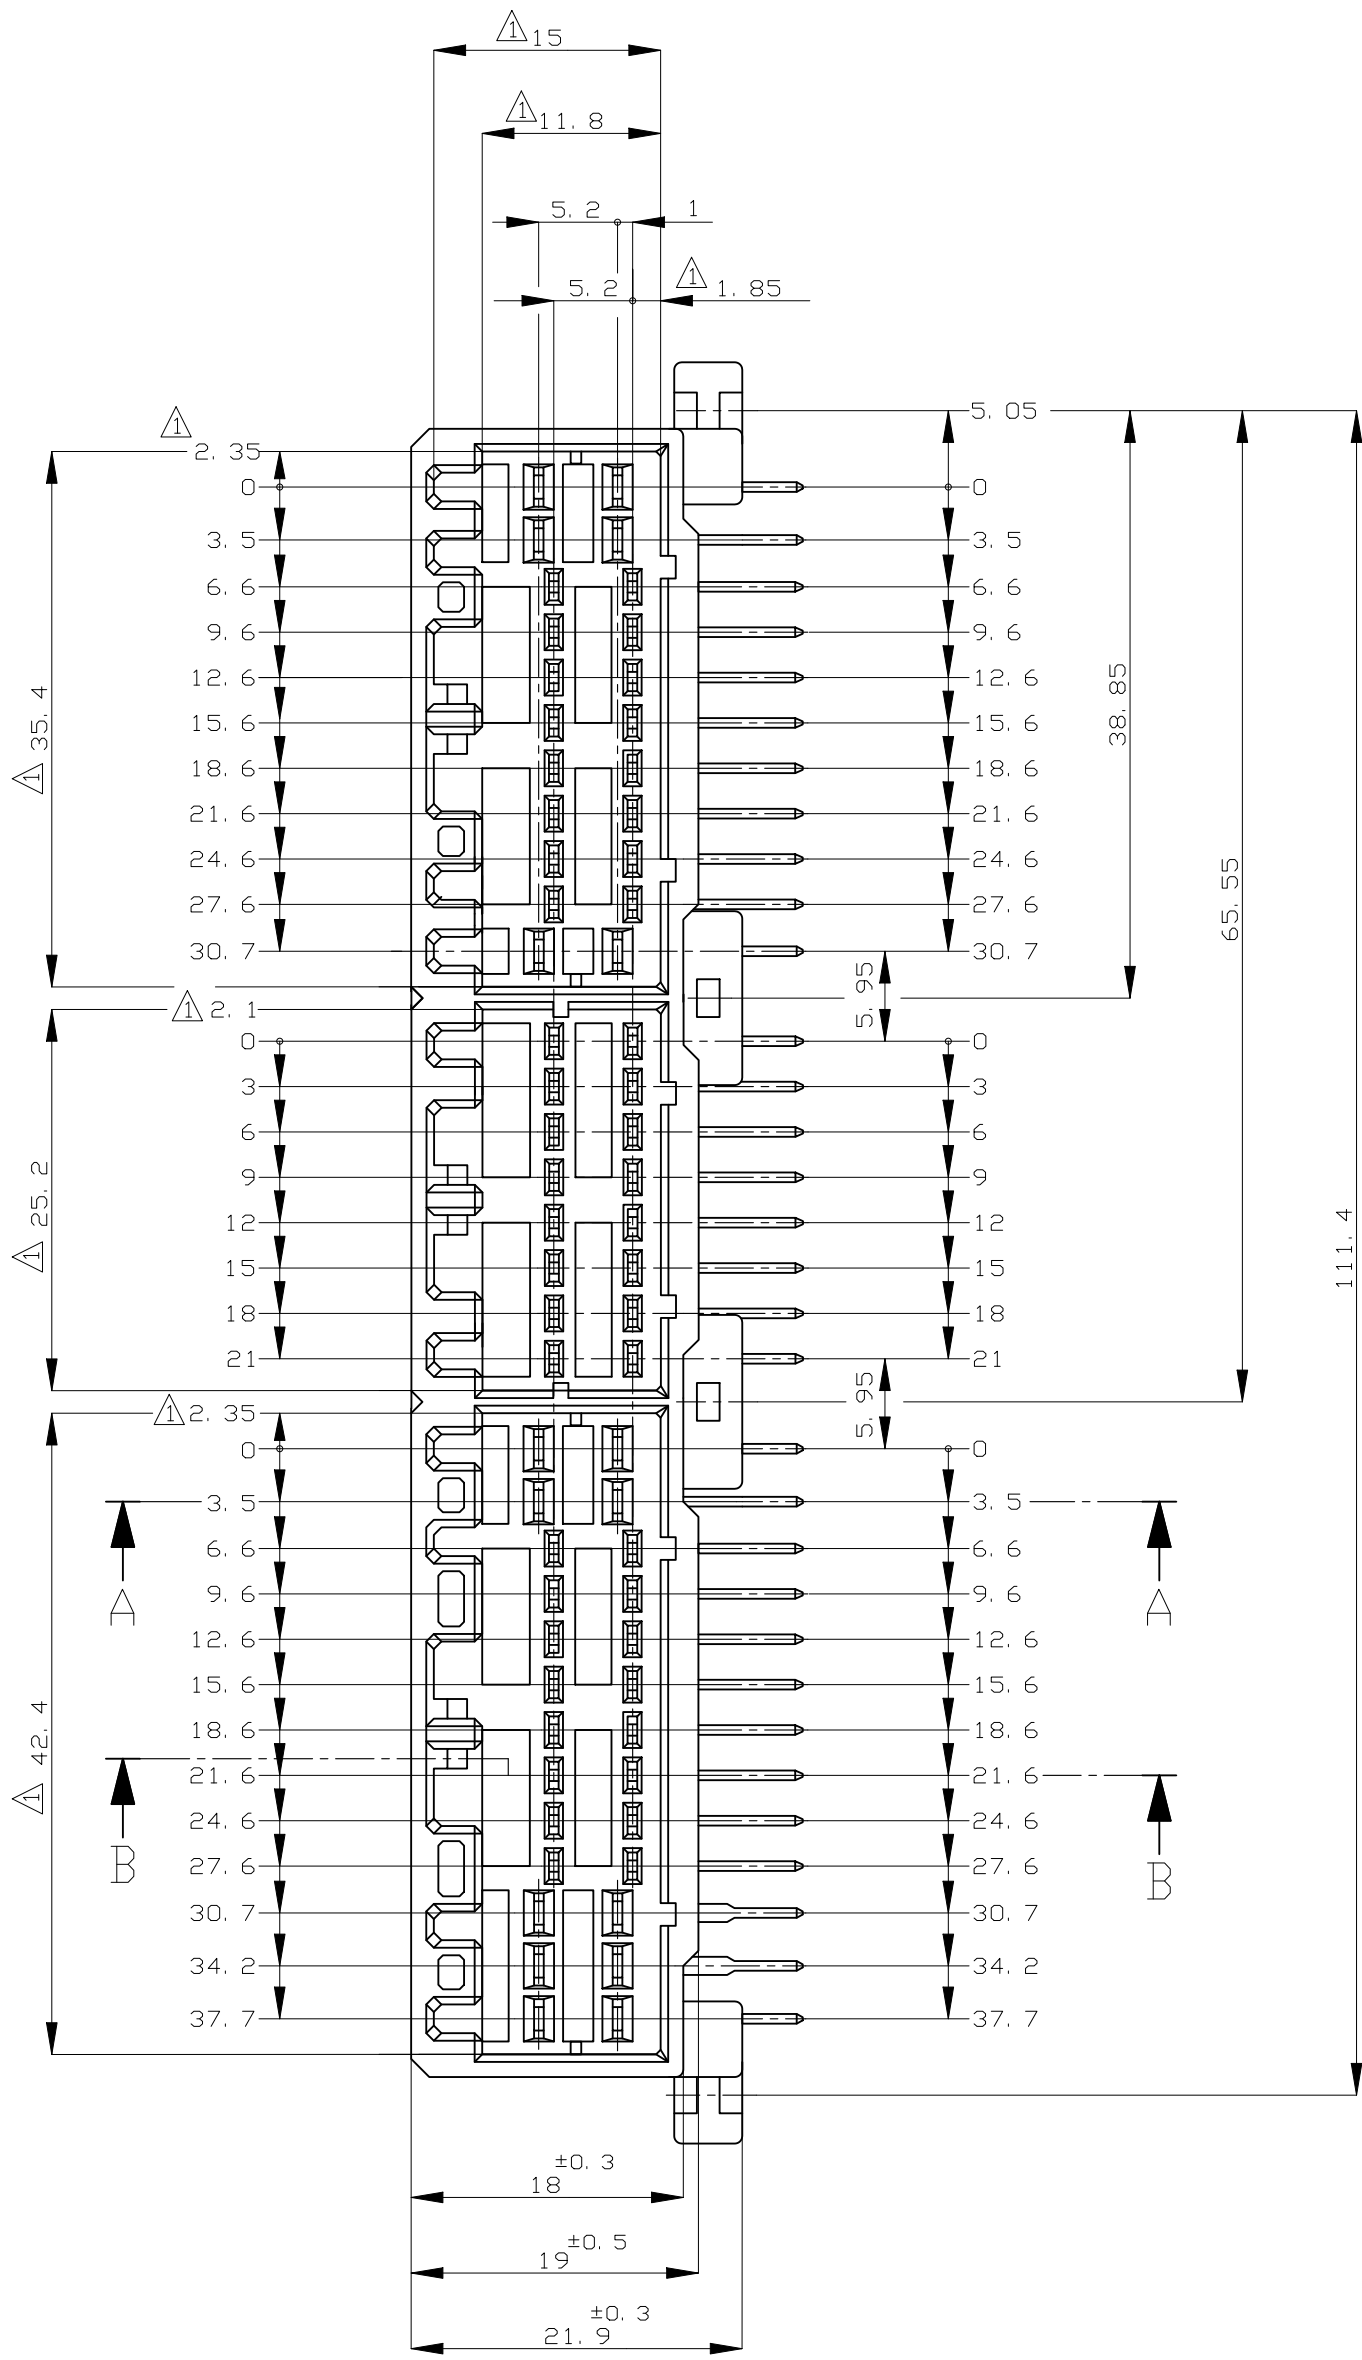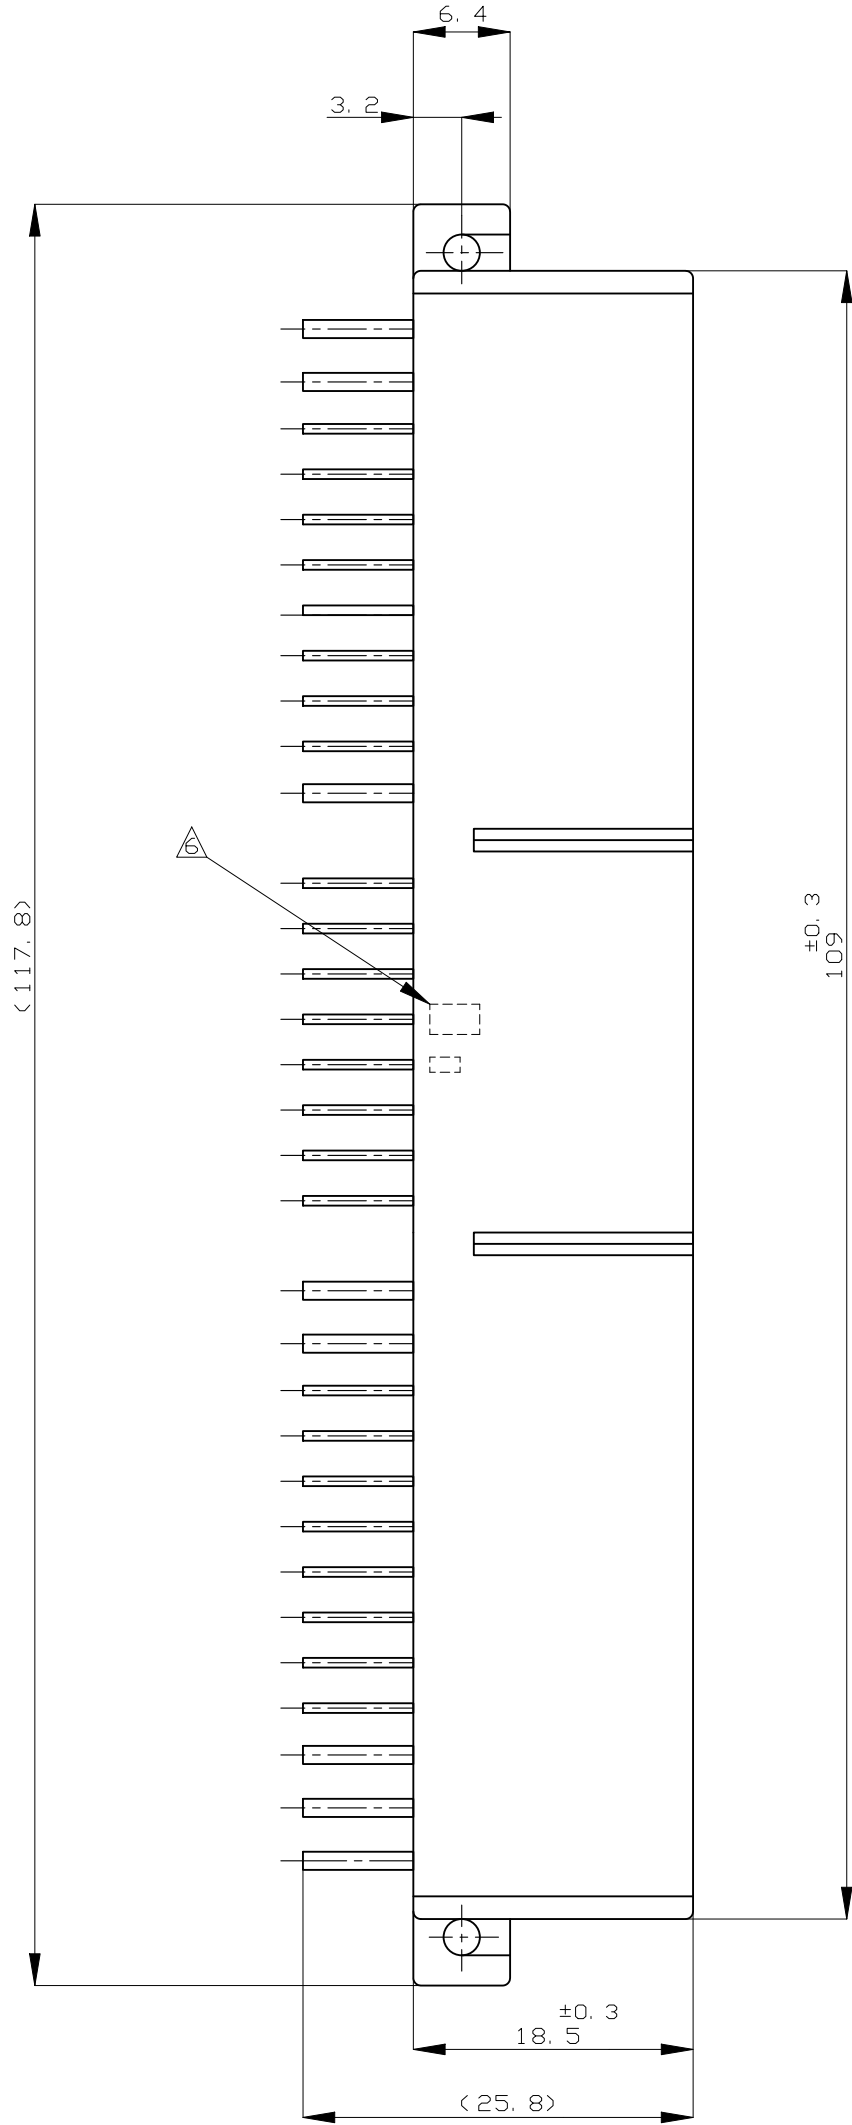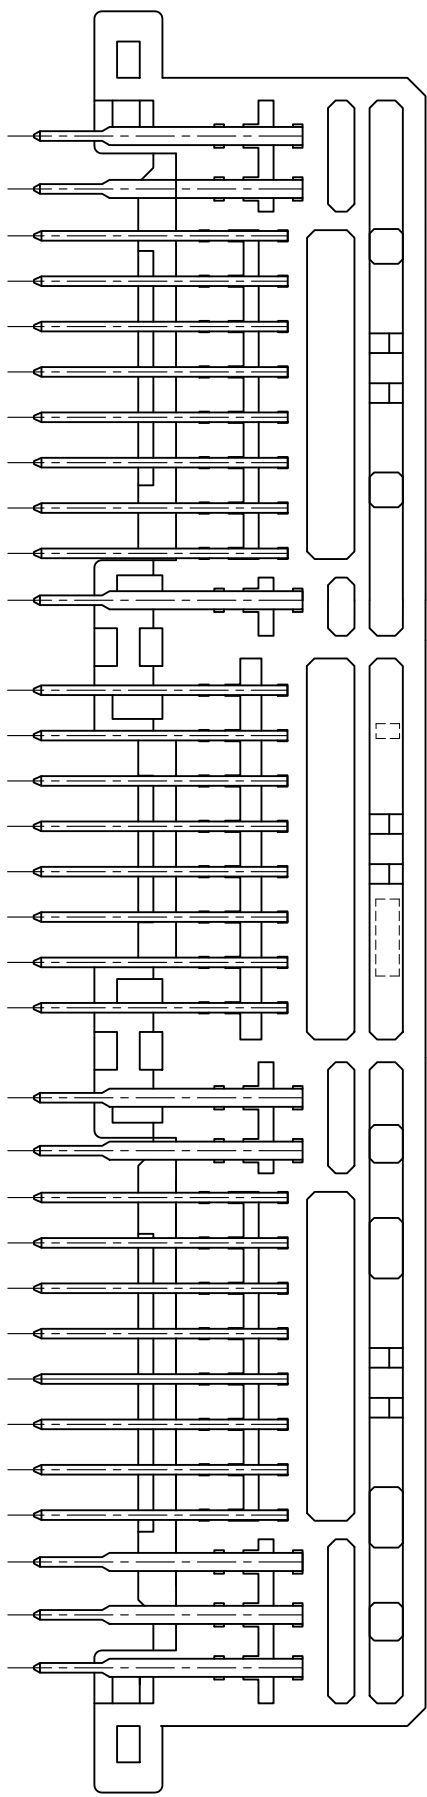

- NOTES
- △ MUST BE KEPT BETWEEN [X] AND 2
 - 2 THE MATING PLUG HSG.PART NUMBER;
174516, 174515, 174514, 917992, 917989, 917981
 - 3 RECOMMENDED MOUNTING SCREW; 3mmDIA, 6mmLENGTH(MAX.)
PAN HEAD, CLASS 2 TAPPING SCREW SPECIFIED IN JIS
B1115, B1122
(TIGHTENING TORQUE; 0.4N.m(4Kg-cm)MAX.)
 - 4 APPLICABLE PRODUCT. SPEC. NO. 108-5280, 108-5342
 - △ CIRCUIT NUMBER ; SEE FIG.1
POWER CIRCUICT NO. ① ~ ⑩
SIGNAL CIRCUICT NO. ⑪ ~ ⑥④
 - △ MARKING FOR DISCERNMENT OF THE CONTACT FINISH

- 注記
- △ [X] 面から2mmの範囲で測定
 - 2. 嵌合相手ハウジング型 174516, 174515, 174514, 917992, 917989, 917981
 - 3. 推奨取付ねじ; JIS B1115, B1122 タッピンねじ, なべ2種
呼び径3, 長さ6mm以下(締付トルク; 0.4N.m(4Kg-cm)以下)
 - 4. 適用製品規格番号; 108-5280, 108-5342
 - △ 回路番号; FIG.1参照のこと
パワー回路; ① ~ ⑩
シグナル回路; ⑪ ~ ⑥④
 - △ コンタクト仕上識別マーク

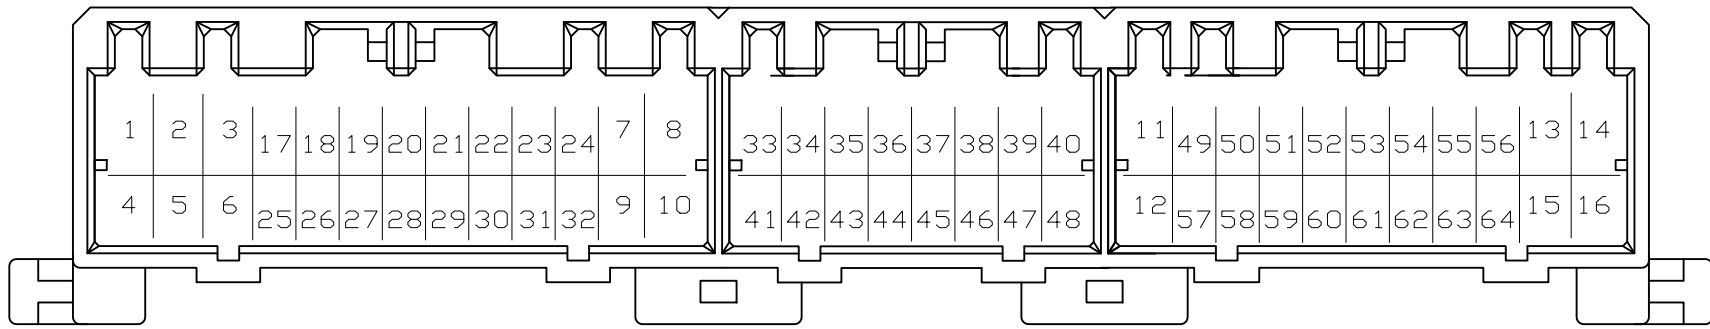
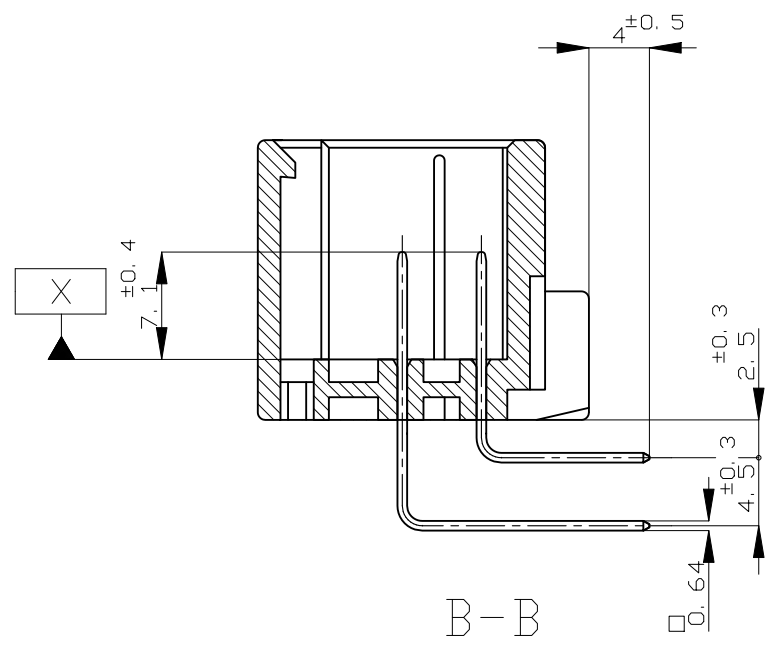
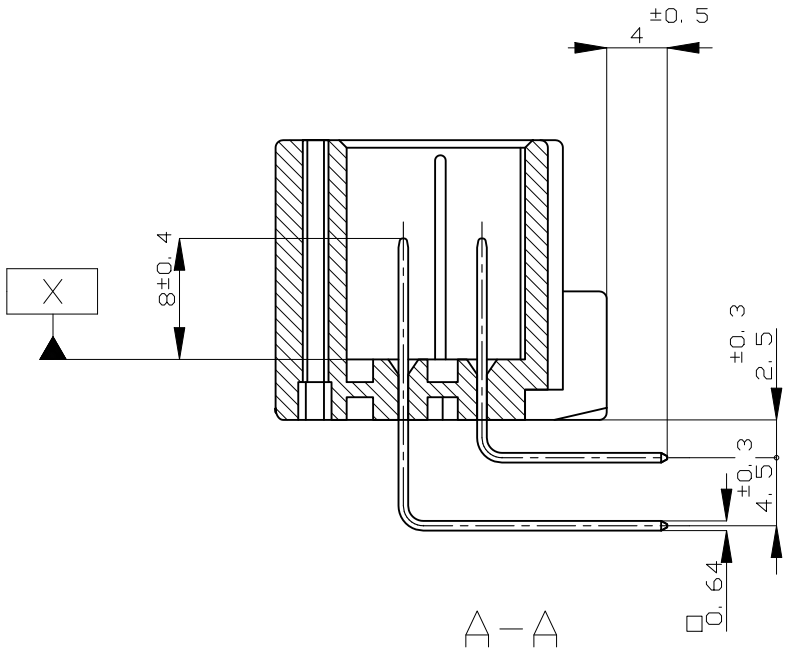


FIG.1

	59	— / —	PRE-TIN x 5L SELECTIVE TIN (MATT) / SELECTIVE GOLD x 10	⑭・⑮	⑤⑦ ~ ⑥④	GRAY 灰色	9-5178764-6
OBSELETE	55	— / —	PRE-TIN x 4L SELECTIVE TIN (MATT) / SELECTIVE GOLD x 4	— / —	⑦⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲⑳㉑㉒㉓㉔㉕㉖㉗㉘㉙㉚㉛㉜㉝㉞㉟㊱㊲㊳㊴㊵㊶㊷㊸㊹㊺㊻㊼㊽㊾㊿	YELLOW 黄色	5-5178764-7
OBSELETE	54	— / —	PRE-TIN x 4L SELECTIVE TIN (MATT) / SELECTIVE GOLD x 22	— / —	③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲⑳㉑㉒㉓㉔㉕㉖㉗㉘㉙㉚㉛㉜㉝㉞㉟㊱㊲㊳㊴㊵㊶㊷㊸㊹㊺㊻㊼㊽㊾㊿	YELLOW 黄色	4-5178764-7
	53	— / —	PRE-TIN x 12 SELECTIVE TIN (MATT) / SELECTIVE GOLD x 52	⑦ ~ ⑮	⑪ ~ ⑥④	GRAY 灰色	3-5178764-6
	52	— / —	PRE-TIN x 16 SELECTIVE TIN (MATT) / SELECTIVE GOLD x 48	— / —	⑪ ~ ⑥④	GRAY 灰色	2-5178764-6
	52	— / —	PRE-TIN x 16 SELECTIVE TIN (MATT) / SELECTIVE GOLD x 48	— / —	⑪ ~ ⑥④	NATURAL 自然色	2-5178764-1
	51	— / —	PRE-TIN x 16 SELECTIVE TIN (MATT) / SELECTIVE GOLD x 64	①・⑬	⑪ ~ ⑥④	GRAY 灰色	1-5178764-6
OBSELETE	8	— / —	PRE-TIN x 52 TIN-LEAD / SELECTIVE GOLD x 12	— / —	③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲⑳㉑㉒㉓㉔㉕㉖㉗㉘㉙㉚㉛㉜㉝㉞㉟㊱㊲㊳㊴㊵㊶㊷㊸㊹㊺㊻㊼㊽㊾㊿	YELLOW 黄色	8-178764-7
OBSELETE	7	— / —	PRE-TIN x 48 TIN-LEAD / SELECTIVE GOLD x 16	— / —	③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲⑳㉑㉒㉓㉔㉕㉖㉗㉘㉙㉚㉛㉜㉝㉞㉟㊱㊲㊳㊴㊵㊶㊷㊸㊹㊺㊻㊼㊽㊾㊿	YELLOW 黄色	7-178764-7
OBSELETE	6	— / —	PRE-TIN x 55 TIN-LEAD / SELECTIVE GOLD x 9	⑬・⑮	⑪ ~ ⑥④	NATURAL 自然色	6-178764-1
	5	— / —	PRE-TIN x 4L TIN-LEAD / SELECTIVE GOLD x 22	— / —	⑦⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲⑳㉑㉒㉓㉔㉕㉖㉗㉘㉙㉚㉛㉜㉝㉞㉟㊱㊲㊳㊴㊵㊶㊷㊸㊹㊺㊻㊼㊽㊾㊿	YELLOW 黄色	5-178764-7
	4	— / —	PRE-TIN x 42 TIN-LEAD / SELECTIVE GOLD x 22	— / —	③④⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑲⑳㉑㉒㉓㉔㉕㉖㉗㉘㉙㉚㉛㉜㉝㉞㉟㊱㊲㊳㊴㊵㊶㊷㊸㊹㊺㊻㊼㊽㊾㊿	YELLOW 黄色	4-178764-7
OBSELETE	3	— / —	PRE-TIN x 12 TIN-LEAD / SELECTIVE GOLD x 52	⑦ ~ ⑮	⑪ ~ ⑥④	YELLOW 黄色	3-178764-7
SUPERSEDED BY 3-5178764-6	3	— / —	PRE-TIN x 12 TIN-LEAD / SELECTIVE GOLD x 52	⑦ ~ ⑮	⑪ ~ ⑥④	GRAY 灰色	3-178764-6
OBSELETE	2	— / —	PRE-TIN x 16 TIN-LEAD / SELECTIVE GOLD x 48	— / —	⑪ ~ ⑥④	YELLOW 黄色	2-178764-7
SUPERSEDED BY 2-5178764-6	2	— / —	PRE-TIN x 16 TIN-LEAD / SELECTIVE GOLD x 48	— / —	⑪ ~ ⑥④	GRAY 灰色	2-178764-6
	2	— / —	PRE-TIN x 16 TIN-LEAD / SELECTIVE GOLD x 48	— / —	⑪ ~ ⑥④	NATURAL 自然色	2-178764-1
OBSELETE	1	— / —	PRE-TIN x 64 TIN-LEAD / SELECTIVE GOLD x 64	①・⑬	⑪ ~ ⑥④	YELLOW 黄色	1-178764-7
OBSELETE	1	— / —	PRE-TIN x 64 TIN-LEAD / SELECTIVE GOLD x 64	①・⑬	⑪ ~ ⑥④	GRAY 灰色	1-178764-6
OBSELETE	0	— / —	PRE-TIN x 64 TIN-LEAD / SELECTIVE GOLD x 64	— / —	— / —	YELLOW 黄色	178764-7
OBSELETE	A	⑬⑭	PRE-TIN x 62	— / —	— / —	NATURAL 自然色	178764-2
	0	— / —	PRE-TIN x 64	— / —	— / —	NATURAL 自然色	178764-1
△ MARKING マーキング		NO CONTACT CIRCUICT NO. △ 欠番	FINISH OF CONTACT タブ仕上 (本数)	POWER CIRCUICT NO. パワースイッチ回路	SIGNAL CIRCUICT NO. シグナル回路	HOUSING COLOR ハウジング色	P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 寸
mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL
材料
HOUSING : PBT
CONTACT : BRASS

FINISH
仕上
SEE TABLE

DWN
T. SHINOHARA
CHK
K. BETSUI
APVD
K. BETSUI

03AUG05
03AUG05
03AUG05

NAME
氏名

TE Connectivity

64POS CAP HOUSING ASSY
.040/.070 SERIES HYBRID I/O CONN.

SIZE
A1

CAGE CODE
00779

DRAWING NO
178764

RESTRICTED TO
—

WEIGHT
28.4 g

CUSTOMER DRAWING

SCALE
2:1

SHEET
1 of 1

REV
D9

4805 (1/15)