


**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0901310942](#)  
**Status:** **Active**  
**Overview:** [C-Grid III Interconnects](#)  
**Description:** 2.54mm Pitch C-Grid III Header, Dual Row, Vertical, 44 Circuits, 0.76µm Gold (Au) Selective Plating

**Documents:**

<a href="#">3D Model</a>	<a href="#">Application Specification 901190001-AS-000 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Packaging Specification PK-90131-0001-000 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Product Specification PS-99020-0001-001 (PDF)</a>	

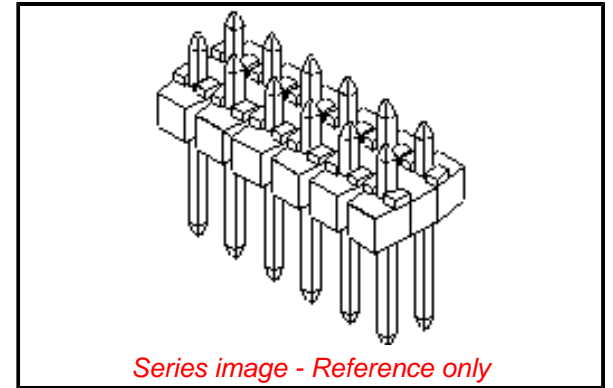

**Agency Certification**

CSA LR19980

**General**

Product Family	PCB Headers
Series	<a href="#">90131</a>
Application	Signal, Wire-to-Board
Component Type	PCB Header
Overview	<a href="#">C-Grid III Interconnects</a>
Product Name	C-Grid III
Taxonomy	PCB Headers and Receptacles
UPC	800753696976

**Physical**

Breakaway	Yes
Circuits (Loaded)	44
Circuits (maximum)	44
Color - Resin	Black
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	3.211/g
Number of Rows	2
Orientation	Vertical
PC Tail Length	2.90mm
PCB Locator	No
PCB Retention	None
Packaging Type	Tray
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Polarized to Mating Part	No
Polarized to PCB	No
Shrouded	No
Stackable	Yes
Temperature Range - Operating	-55° to +125°C
Termination Interface: Style	Through Hole

**Electrical**

Current - Maximum per Contact 3.0A

**EU ELV**

**Not Relevant**

**EU RoHS**

**Not Reviewed**

**REACH SVHC**

Not Contained Per  
-ED/01/2018 (15  
January 2018)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[90131](#) Series

**Mates With**

C-Grid III Vertical PCB Receptacle [90151](#)  
 . C-Grid III Right-Angle PCB Receptacle  
[90152](#) . C-Grid III Crimp Housing [90142](#) . C-  
 Grid III Modular Crimp Housing [90143](#)

Voltage - Maximum 350V

**Solder Process Data**

Duration at Max. Process Temperature (seconds) 003  
Lead-free Process Capability WAVE  
Max. Cycles at Max. Process Temperature 001  
Process Temperature max. C 235

**Material Info**

**Reference - Drawing Numbers**

Application Specification 901190001-AS-000  
Packaging Specification PK-90131-0001-000  
Product Specification PS-99020-0001-001  
Sales Drawing SD-90131-001-001

This document was generated on 01/05/2023

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**