

2343405-1 ✓ ACTIVE

LUMAWISE | LUMAWISE Endurance S

TE Internal #: 2343405-1

Light Controller Base, Gray, Height 16.5 mm, Keyed / Not Vented, UL, 4 Position, Sealable, Printed Circuit Board, Power, LUMAWISE Endurance S

[View on TE.com >](#)



Connectors > Lighting Connectors > Street Lighting Controls > Street Lighting Connectors



Lighting Product Type: **Light Controller Base**

Primary Product Color: **Gray**

Product Height: **16.5 mm**

Lighting Connector Features Included: **Keyed, Not Vented**

Compatible With Agency/Standards Products: **UL**

Features

Product Type Features

Lighting Product Type	Light Controller Base
Sealable	Yes
Connector & Contact Terminates To	Printed Circuit Board

Body Features

Primary Product Color	Gray
-----------------------	------

Dimensions

Product Height	16.5 mm
Product Diameter	43.5 mm

Configuration Features

Lighting Connector Features Included	Keyed, Not Vented
Number of Positions	4

Industry Standards

Compatible With Agency/Standards Products	UL
---	----



Contact Features

Contact Current Rating (Max)	5 A
------------------------------	-----

Operation/Application

Circuit Application	Power
---------------------	-------

Usage Conditions

Operating Temperature Range	-40 – 90 °C[-40 – 194 °F]
-----------------------------	---------------------------

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Compliance


[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 245°C




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

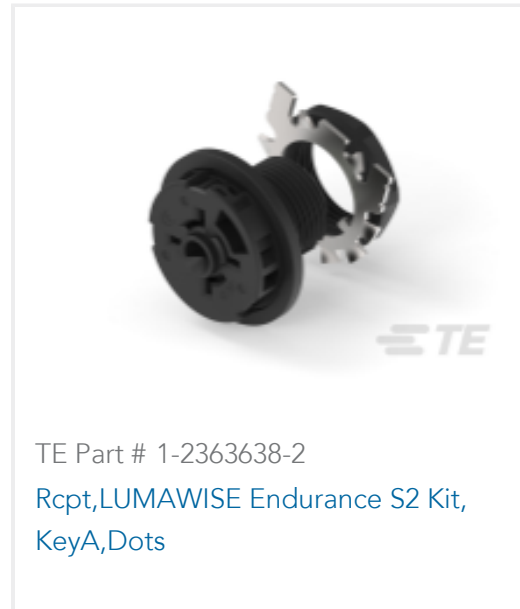

Also in the Series | **LUMAWISE Endurance S**

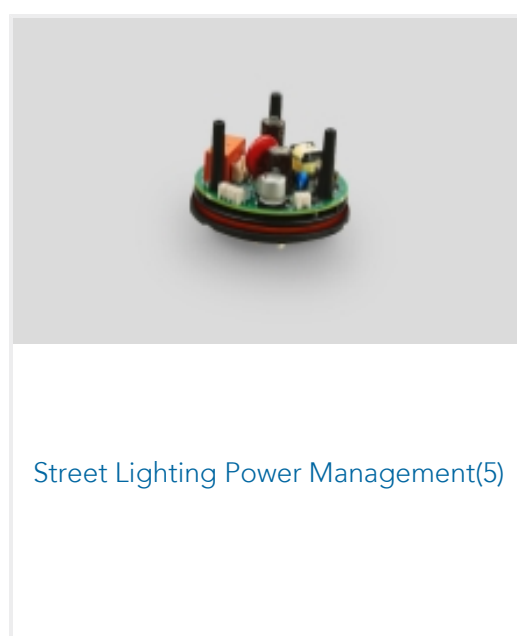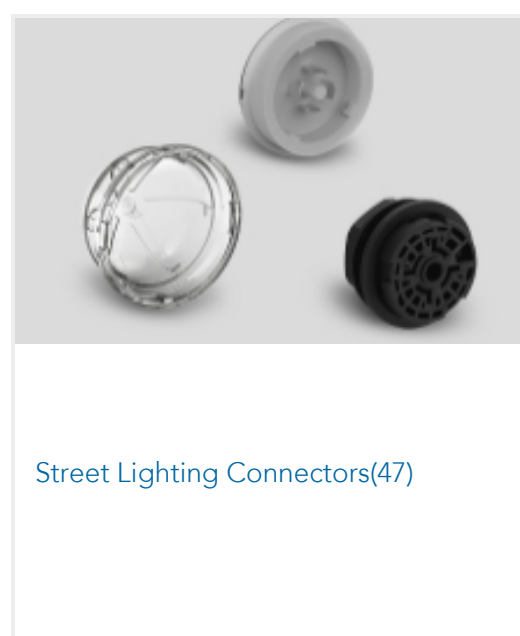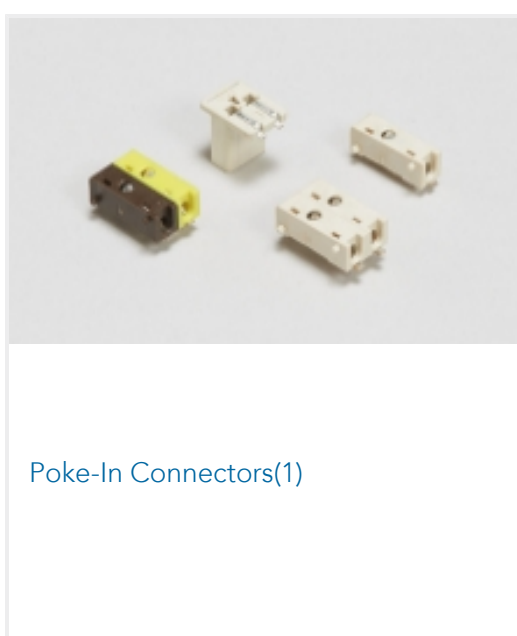

Customers Also Bought





TE Part #2329013-1
LUMAWISE 40MM DIA DOME SMOKE
GRAY LOW



TE Part #2329013-2
LUMAWISE 40MM DIA DOME SMOKE
GRAY TALL



TE Part #1-2337216-3
RAIN-SKIRT, LUMAWISE
ENDURANCE S, DK GRY



TE Part #2213837-1
ASSEM., 40MM LUMAWISE
ENDURANCE S



TE Part #2363638-2
Receipt, LUMAWISE Endurance S2 Kit,
KeyA

Documents

Product Drawings

[MODULE,40MM LUMAWISE ENDURANCE S. KEYED](#)

English

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_2343405-1_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2343405-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2343405-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[LUMAWISE STREET LIGHT DIMMING AND CONTROL QUICK REFERENCE GUIDE](#)

English

[Datasheet - Lumawise Z10](#)

English

[Lumawise Endurance S Modules](#)

English

Product Specifications



Application Specification

English

Agency Approvals

[CB_CERT_IEC_61984_US_34131_M1_UL_C1](#)

English

[CB_CERT_US_34131_M1_UL_4788988643_TR_C1](#)

English