
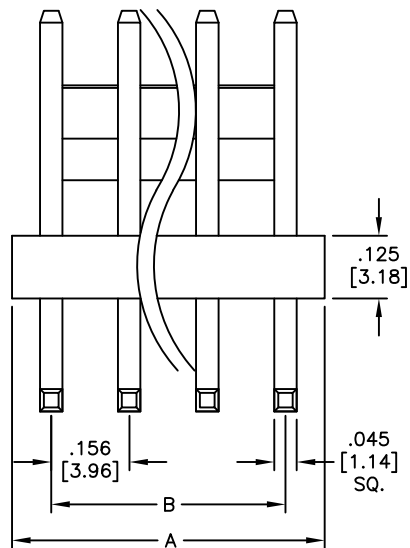


APPROVED: _____

DATE: _____ TITLE: _____

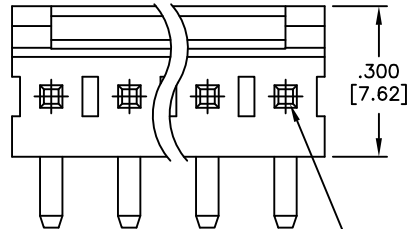

SPECIFICATIONS:

Material:

Insulator: Ny66, rated UL 94V-0

Insulator color: White

contact: Brass

Plating:

Tin over Nickel underplate overall

Electrical:

Current rating: 7.0 Amp

Contact Resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC/DC

Temperature Rating:


Operating temperature: -40°C to +105°C

Environmental:


Lead free, RoHS compliant



Rev	AWO #	Description	Date	Appr
-		RELEASED	6/18/10	
A		ECN	12/8/10	
B		REVISED DIM.	2/17/14	AY/MY
C		REVISED SPEC.	2/24/20	AY/KL

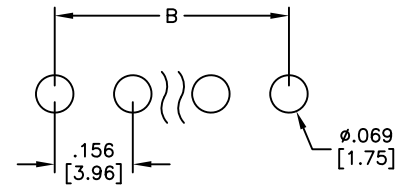

RECOMMENDED PCB LAYOUT

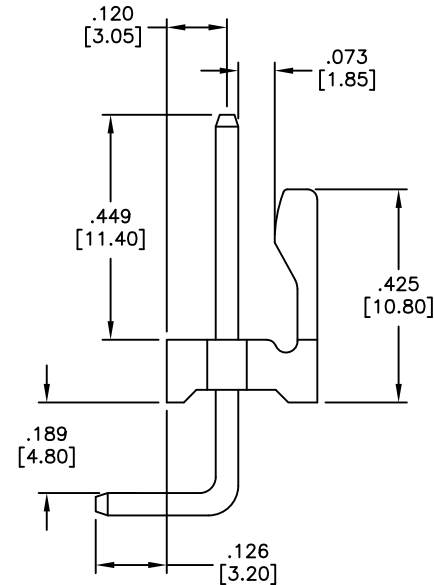

Positions: 2 thru 20

A = .156 [3.96] x No. of Positions

B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES HOLES
.X ± .10 Ø.X ± .10
.XX ± .020 Ø.XX ± .015
.XXX ± .015 Ø.XXX ± .010

APPROVALS		DATE
DRAWN	DY	6/18/10
CHECKED		
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE		
.156 [3.96] HEADER, RIGHT ANGLE		
SIZE	PART NO.	REV.
X	LHD-XX-TRA-V0	C
REF: S00019C		SCALE: NTS
SHEET 1 OF 1		