

DESCRIPTION: 19.05mm [0.750in] CENTER DUAL PORT D-SUB - MALE OVER FEMALE

SPECIFICATIONS:


ELECTRICAL:

INSULATION RESISTANCE:	1,000 Ohms MIN.
DIELECTRIC WITHSTANDING VOLTAGE:	1000 VAC FOR 1 MIN
OPERATING TEMPERATURE:	-55°C TO +105°C
CURRENT RATING:	5A

MATERIALS:

CONTACTS:	GOLD PLATED BRASS (SEE P/N KEY BELOW)
INSULATOR:	PA9T UL94 V-0 RATED, BLACK
	260°C PROCESS TEMP.
SHELL:	NICKEL PLATED STEEL
BRACKET:	NICKEL PLATED ZINC
BOARD LOCK:	TIN PLATED BRASS

25 PIN
SHOWN

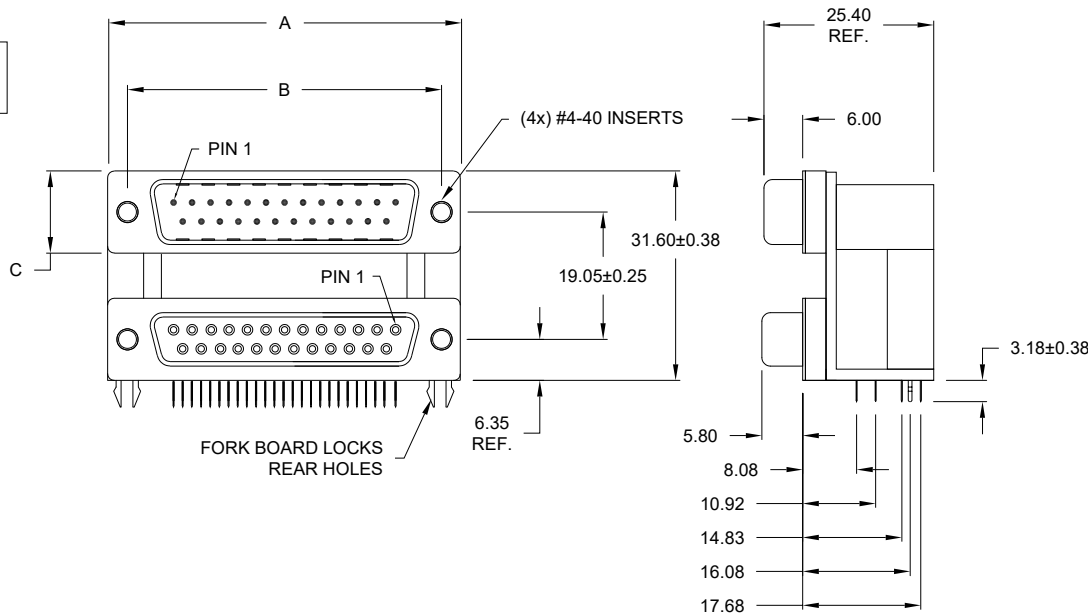

DIMENSIONS:				
	9	15	25	37
A±0.38	30.81	39.19	53.04	69.32
B±0.25	24.99	33.32	47.04	63.50
C±0.38	12.55	12.55	12.55	12.55

178-YYY-413R69Y

SERIES _____

POSITIONS _____

009

015

025

037

GENDER _____

31 = FEMALE OVER MALE

41 = MALE OVER FEMALE

51 = FEMALE OVER FEMALE

61 = MALE OVER MALE

SHELL PLATING _____

3 = NICKEL

HARDWARE OPTIONS _____


69 = 4-40 INSERTS/BOARD LOCKS (REAR)

PLATING OPTIONS _____

1 = SELECTIVE (GF MATING AREA / TIN PLATED TAILS)

A = 30u" GOLD MATING AREA/GOLD FLASH TAILS

9 = 30u" GOLD IN MATING AREA / TIN TAILS

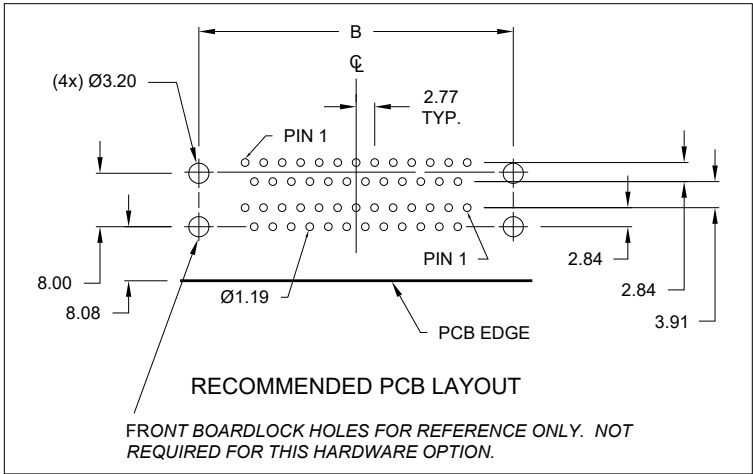

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

C. SMITH

DATE:

03/30/2007

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:

NTS

SHEET

OF

1

1

REV

11

DWG NO.

178-YYY-413R691