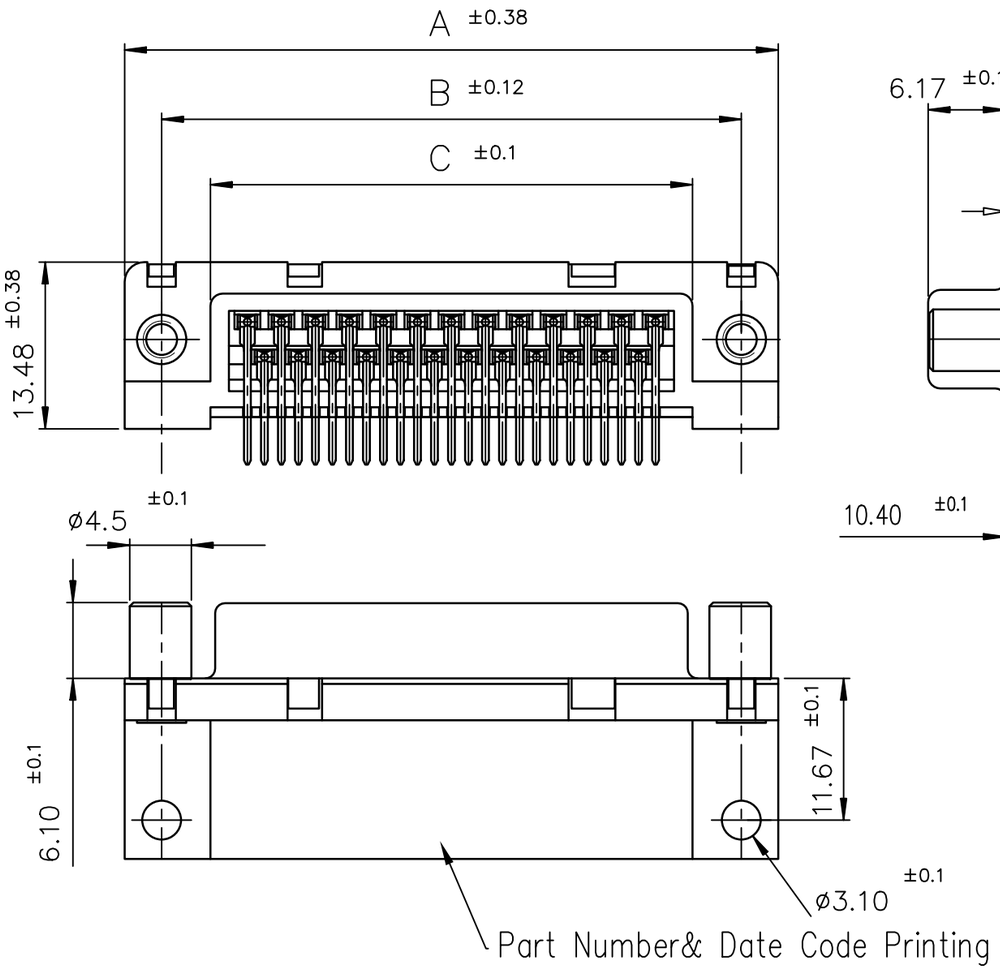

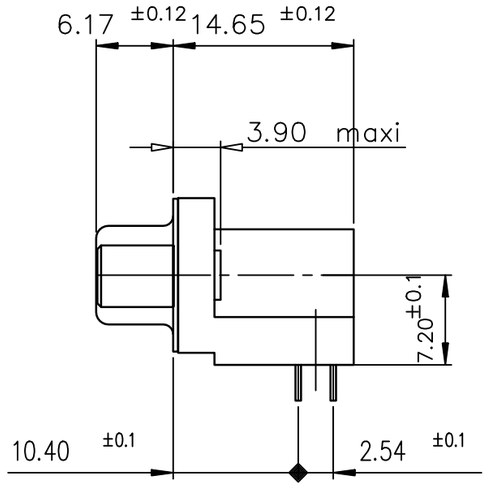

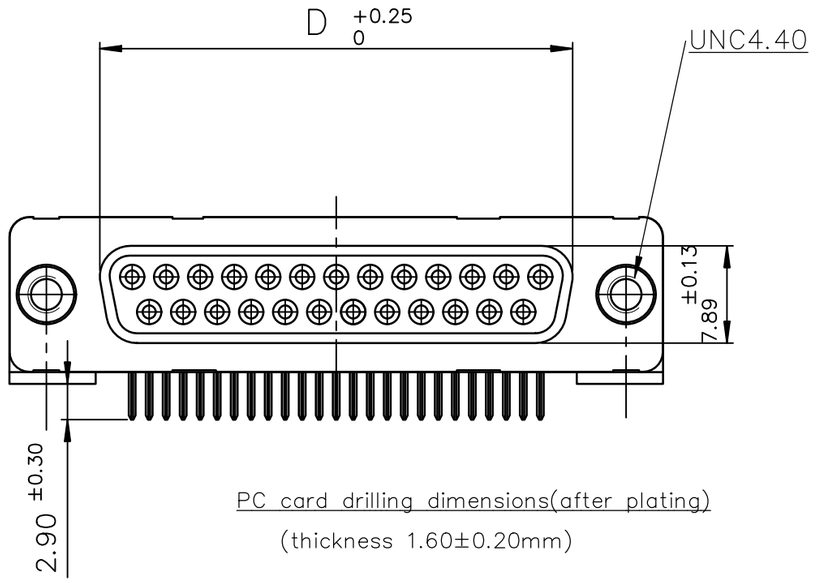

PC card drilling dimensions(after plating)

(thickness 1.60±0.20mm)

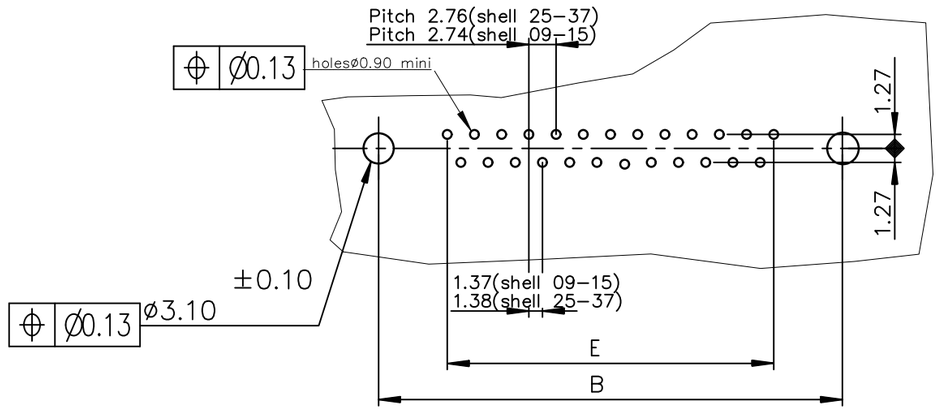

SHELL	A±0.38	B±0.12	C±0.10	$D^{+0.25}_{0}$	E±0.07	PART NUMBER	PART NUMBER
09	30.81	24.99	16.96	16.21	10.96	D09S13A4PV00LF	D09S13A6PV00LF
15	39.14	33.32	25.18	24.54	19.18	D15S13A4PV00LF	D15S13A6PV00LF
25	53.03	47.04	39.12	38.25	33.12	D25S13A4PV00LF	D25S13A6PV00LF
37	69.32	63.50	55.68	54.71	49.68	D37S13A4PV00LF	D37S13A6PV00LF
						200 MATING CYCLES	500 MATING CYCLES

FOR GENERAL CHARACTERISTICS & ROHS DETAILS

REFER DWG.NO: C01–8646–0000

mat'l. code				surface		tolerance	projection	product family
SEE NOTES				ISO 1302 ✓		ISO 406 ISO 1101		D–SUB
ltr	ecn no	dr	date	tolerances unless otherwise specified				title
G	ELX–I–58900	GM	2026–05–01	angles	linear	.0±.0.3	mm	SOCKET CONNECTOR
						.00±.0.15		RIGHT ANGLED WITH FEMALE SCREW
				0°±1°		.000±.005	scale NTS	
				dr	JOHN SLEEBA	2004–08–02		dwg no C01–8646–0487
				engr	GREGAR M	2026–05–01	Amphenol FCi	sheet 1 of 1
				chr	ARUN C	2026–05–01		size A3
				appd	ALEX BABU	2026–05–01		type Product Customer Drawing
sheet index	revision	G						
	sheet	1						

© 2016 AFCI