




Terminals & Splices > Quick Disconnects

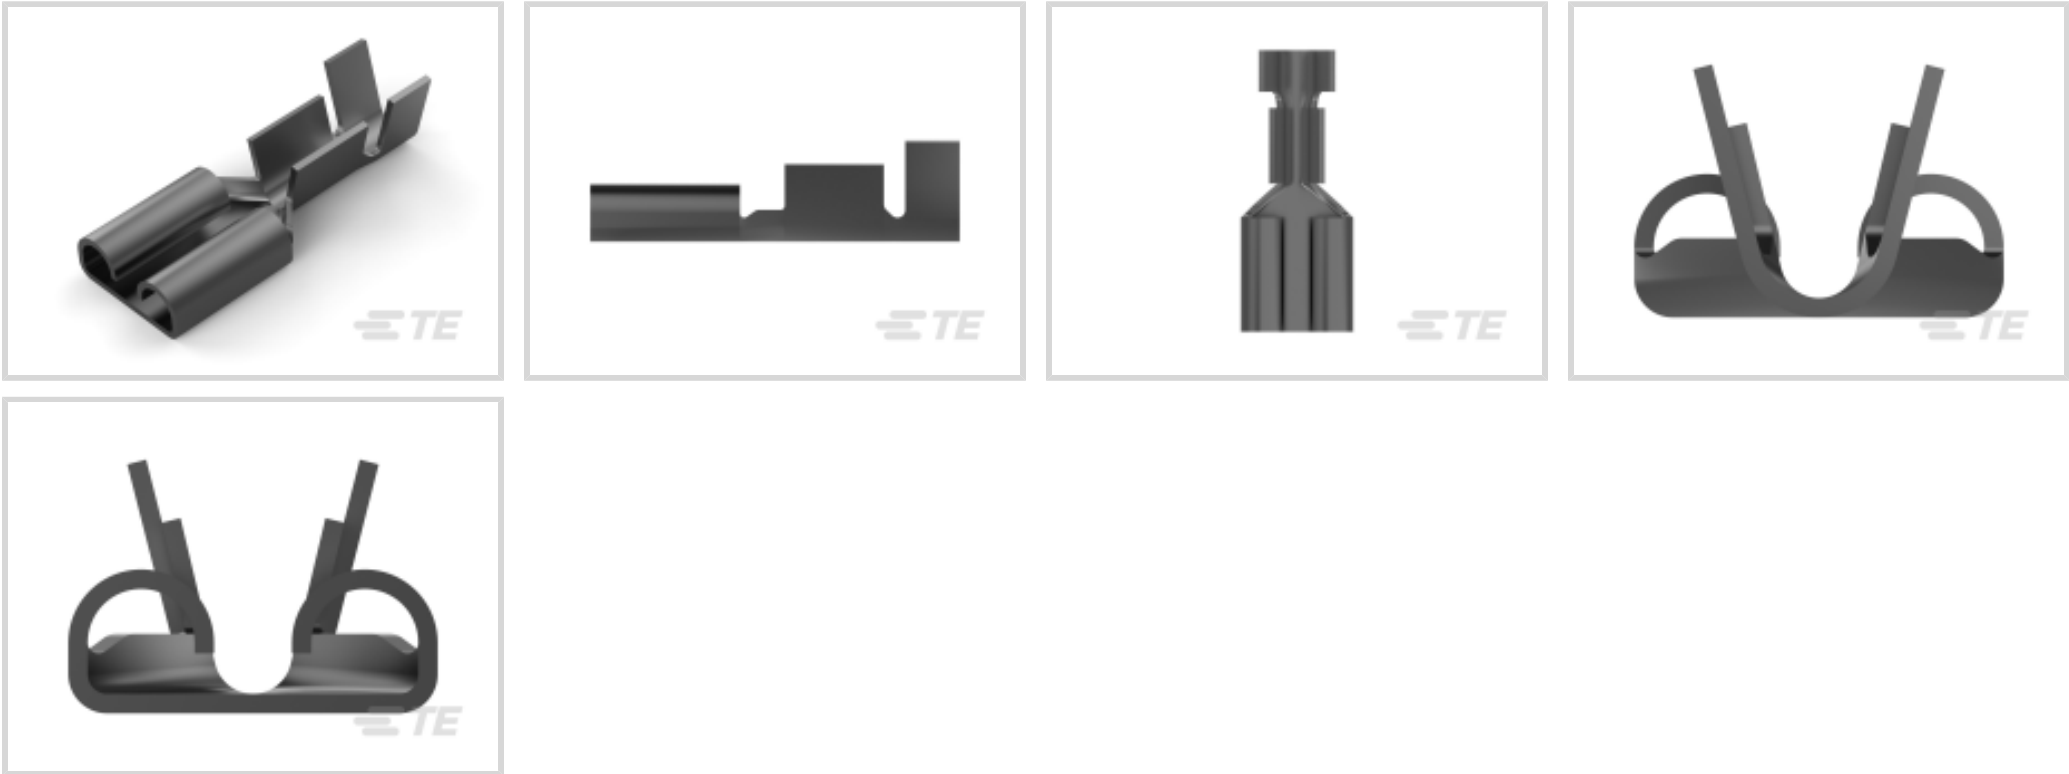

Quick Disconnect Terminal Type: **Receptacle**

Wire Size: **1 – 2.5 mm²**

Mating Tab Width: **6.35 mm [.25 in]**

Mating Tab Thickness: **.81 mm [.032 in]**

Features

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	6.35 mm[.25 in]
Mating Tab Thickness	.81 mm[.032 in]
Terminal Orientation	Straight
Contact Base Material	Phosphor Bronze
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Open

Dimensions

Wire Size	1 – 2.5 mm ²
Product Length	19 mm[.748 in]
Compatible Insulation Diameter Range	2.11 – 3.1 mm[.083 – .122 in]
Terminal Material Thickness	.41 mm[.016 in]

Packaging Features

Packaging Method	Strip/Reel
------------------	------------



Packaging Quantity	5000
Product Type Features	
Insertion Force	Low
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]
Other	
EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant
Line	Premier
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Connection Capacity	Single
Termination Features	
Product Terminates To	Wire & Cable
Mechanical Attachment	
Wire Insulation Support	With
Mating Retention Type	Dimple
Extraction Force	8.1 kgf
Industry Standards	
Compatible With Agency/Standards Products	UL
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per



homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 2376595-2
250 FASTON PCB TAB TPBR

TE Part # 1-100645-3
250 FASTON,REC.,14-17AWG, PHBZ

TE Part # 160862-8
FF FAH STECKH 8,0

TE Part # 2150202-1
OCEAN_2.0_Applicator-E-110F140OV-REM

TE Part # 2150202-2
OCEAN_2.0_Applicator-E-110F140OV-REA

TE Part # 7-2150202-7
OCEAN_2.0_SPARE_PART_KIT-110F140OV

Also in the Series | FASTON 250

Compression Connectors(4)

Crimp Terminal Housings(132)

Insertion & Extraction Tools(6)

Magnet Wire Terminals(1)



PCB Terminals(134)



Quick Disconnects(425)



Splices(4)

Customers Also Bought



TE Part #63316-2
187 FASTON FLAG REC 18-14 AWG TPBR



TE Part #160928-4
FF 250 REC 0.5-1.0MM2 TPPB




TE Part #1-66597-1
III+ PIN,18-14,TIN ,STRIP




TE Part #1969807-1
04P UMNL PIN HDR ASSY, PIN V0 GW



TE Part #1-66598-2
III+ SKT,18-14,TIN ,STRIP

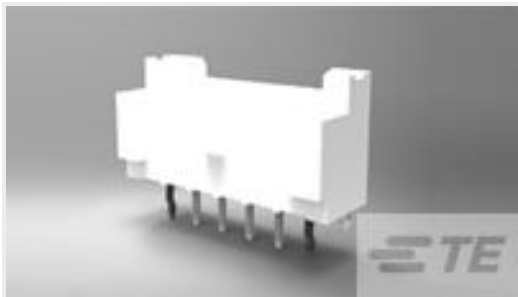

TE Part #1744418-4
4 POS EP 2.5 HDR, GLOW WIRE

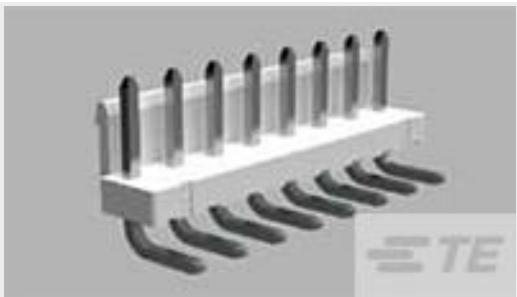

TE Part #1744428-8
3.96 EP HDR ASSY 8P R/A, GW



TE Part #1744429-2
3.96 EP HDR ASSY 2P W/PEGS, GW

Documents

Product Drawings

250 FASTON,REC.,17-14 AWG,TPPB

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_160916-4_R.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_160916-4_R.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_160916-4_R.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



[Product Specifications](#)

[Application Specification](#)

English