



Connectors > Contacts > Connector Contacts > Contact: Component To Wire ; 5A, 28-18 wire size, gold plated



Contact Type: **Receptacle**
Contact Mating Area Plating Material: **Gold**
Operating Voltage: **250 VAC**
Contact Retention Within Housing: **With**
Contact Retention Type Within Housing: **Locking Lance**

All Contact: [Component To Wire ; 5A, 28-18 wire size, gold plated \(10\)](#)

Features

Packaging Features

Packaging Quantity	15000
Packaging Method	Bag & Box

Product Type Features

Discrete Wire Type	Solid or Stranded
Sealable	No

Dimensions

Compatible Insulation Diameter Range	1.27 – 1.9 mm[.048 – .075 in]
Wire Size	.34 – .86 mm ²

Mechanical Attachment

Wire Insulation Support	With
Contact Retention Type Within Housing	Locking Lance

Contact Features



Contact Underplating Material	Nickel
Contact Orientation	Straight
Contact Mating Area Plating Material Thickness	.38 µm[15 µin]
Mating Tab Width	.9 mm[.035 in]
Contact Length	15.58 mm[.613 in]
Mating Tab Thickness	.5 mm[.019 in]
Barrel Type	Open
Contact Type	Receptacle
Contact Mating Area Plating Material	Gold
Contact Retention Within Housing	With
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	5 A

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Configuration Features

Compatible With Wire & Cable Type	Discrete Wire
-----------------------------------	---------------

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Other

EU RoHS Compliance	Compliant
EU ELV Compliance	Compliant

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold



EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-D9934-A66A
Receptacle and Tab Housing: 2.5 mm Pitch, 250V




TE Part # 91595-1
CCII D-2 M REC TAB 22-18 ASSY



TE Part # 1276716-1
EXT-TOOL FOR DYNAMIC D2 CONN


Also in the Series | Dynamic 2000 Series

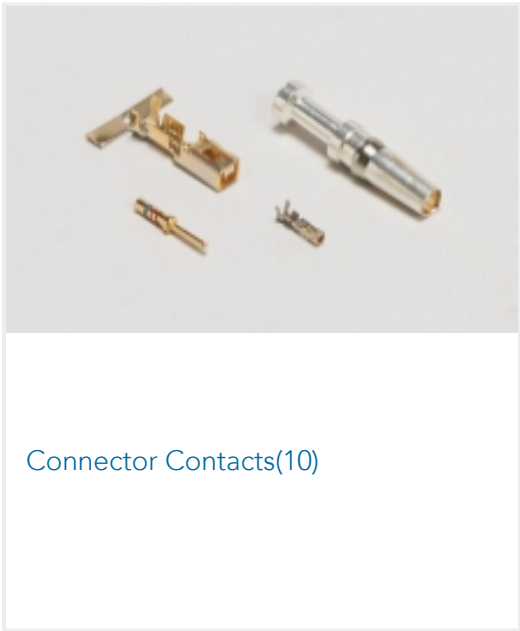

Connector Contacts(10)




Connector Hardware(3)

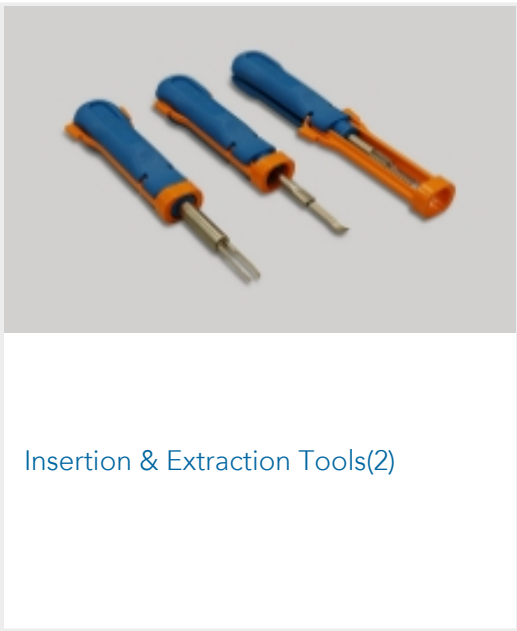

Insertion & Extraction Tools(2)



PCB Headers & Receptacles(44)

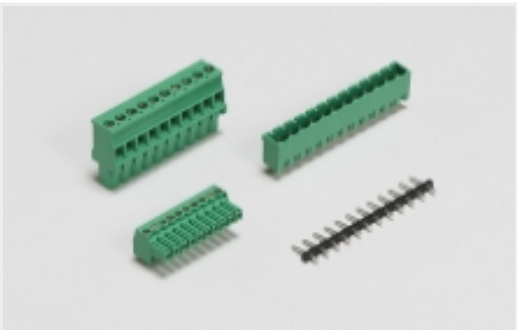

PCB Terminal Blocks(23)



Wire-to-Board Connector Assemblies & Housings(54)

Customers Also Bought



TE Part #917805-2
Contact: Component To Wire ; 20-45A , 20-8 wire size



TE Part #2-1318118-9
Receptacle and Tab Housing: 2.5 mm Pitch, 250V



TE Part #1-917807-2
DYNAMIC D-5200M REC HSG 4P X-X



TE Part #1-175218-5
DYNAMIC 3000 CONTACT



TE Part #1-178288-3
DYNAMIC DD3100 REC HSG 3P (SGL)

Documents

Product Drawings

DYNAMIC D-2000 REC CONT M L/P

English

CAD Files

Customer View Model

ENG_CVM_1318107-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_1318107-1_A.3d_stp.zip

English

Customer View Model

ENG_CVM_1318107-1_A.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Product Specifications

Dynamic Connector D-2000 Series

Japanese

Application Specification

Japanese

Instruction Sheets

Instruction Sheet (non U.S.)

Japanese

Instruction Sheet (non U.S.)

Japanese

Agency Approvals

TUV Certificate

English

TUV Certificate

English

TUV Certificate

English